


STARBURST QUAD™ - SUSPENDED

Project Name:	Fixture Type:
Fixture Code:	Quantities:



STARBURST QUAD™ - SUSPENDED

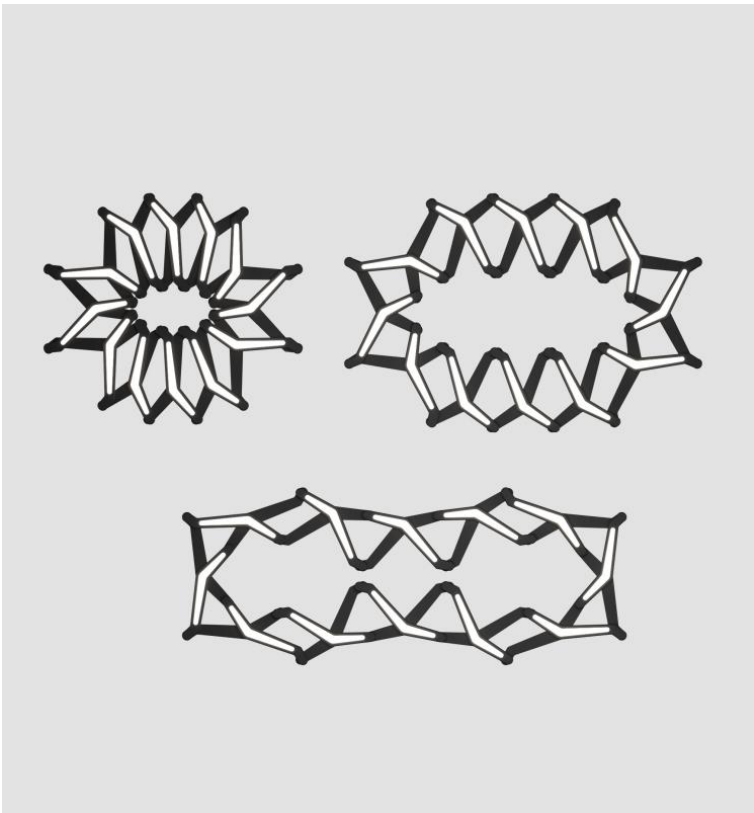

STARBURST QUAD™ - SUSPENDED

STARBURST is a collection of kinetic pendants that when in compact form are semblant of stars which can then manually expand into a larger circle, triangle, or quad. Starburst can adapt to either organic or cosmic interior designs. The overlapping and interlacing of multiple brackets create contours that resemble elements of nature and can evoke feelings of well-being and positivity. The angularity of the brackets and diffusers complement futuristic themes that communicate innovation, high-tech, and the avant-garde. As a single pendant, Starburst acts as an illuminated art piece. When multiplied and layered, a celestial effect is created. To learn more watch the Deep Dive in image gallery.

GENERAL SPECIFICATION

Body and Trim

Die-cast aluminum.

Suspension

Power over cable.

Remote emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

Mechanical

Mounts directly over a 4" electrical junction box (by others - North America only).

Sensors

Consult factory regarding sensor compatibility.

Approvals

Damp Rated.

Estimated L70 @25°C (77°F)

> 235,000 hrs.

Design

US Pat. No. D882,862.

US Pat. No. D895,196, D893,796 and D894,474

Finish

Powder coated.

Lens

Acrylic.

Remote mounting of drivers

Wire Size 18 AWG - Max distance (from canopy to drivers) 9.5' (3m), Wire size 16 AWG - Max distance 19.5' (6m), Wire size 14 AWG - Max distance 29.5' (9m). Drivers must be accessible after installation. For longer remote distances, consult factory.

Drivers

Remote, HPF electronic for 120-277V, (EU-240V).

Delivered lumens

Delivered lumens & LPW based on 4000K CRI 90+.

Reported L70 @25°C (77°F)

> 102,000 hrs.


Designed by

Jacob Antoni

Seismic Bracing

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

OPTICS & FEATURES



Suspended Direct



Suspended Direct/Indirect



Declare



STARBURST QUAD™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

STRQ1P01 Direct, 7700 lms, 54 LPW **STRQ2P01** Direct/Indirect, 12800 lms, 54 LPW

B. CRI

CR90 CRI 90+

C. CCT

CTA30 3000K **CTA35** 3500K **CTA40** 4000K

D. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ²

¹ Not available in North America.
² Only available with DA01.

E. DIMMING

DA01 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹
DA30 DSI/switchDim ²

¹ Not available with V3
² Not available in North America

F. FINISH

FA01 White **FA02** Black Metallic - Textured **FA20** Silver Metallic - Textured **FA25** Gold Metallic - Textured
FA27 Wood grain - Light Cherry ¹ **FA28** Wood grain - Dark Walnut ¹ **FA30** Wood grain - White Oak ¹ **FA44** Midnight Blue Metallic - Textured
FA45 Copper Metallic **FA46** Charcoal Metallic - Textured **FA47** Bronze Metallic - Textured **FA52** Champagne Metallic
FA53 Red Metallic - Textured

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

G. CANOPY FINISH

CF01 White **CF02** Black Metallic - Textured **CF20** Silver Metallic - Textured **CF25** Gold Metallic - Textured
CF44 Midnight Blue Metallic - Textured **CF45** Copper Metallic **CF46** Charcoal Metallic - Textured **CF47** Bronze Metallic - Textured
CF52 Champagne Metallic **CF53** Red Metallic - Textured

H. CIRCUITS

CS1 Single circuit **CS2** Dual circuit

I. EMERGENCY

E0 Not required **E2** Emergency system - Remote














STARBURST QUAD™ - SUSPENDED

TECHNICAL DATA

LUMINAIRE











Code	STRQ1P01	STRQ2P01
Light Direction	Direct	Direct/Indirect
Delivered lms	7700	12800
LPW	54	54

FINISH - FIXTURE

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Wood grain - Light Cherry ¹	Wood grain - Dark Walnut ¹	Wood grain - White Oak ¹	Midnight Blue Metallic - Textured
							
Copper Metallic	Charcoal Metallic - Textured	Bronze Metallic - Textured	Champagne Metallic	Red Metallic - Textured			

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

FINISH - CANOPY

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Midnight Blue Metallic - Textured	Copper Metallic	Charcoal Metallic - Textured	Bronze Metallic - Textured
							
Champagne Metallic	Red Metallic - Textured						





APPROVALS



STARBURST QUAD™ - SUSPENDED




DIMENSIONAL DIAGRAMS

COLLAPSED

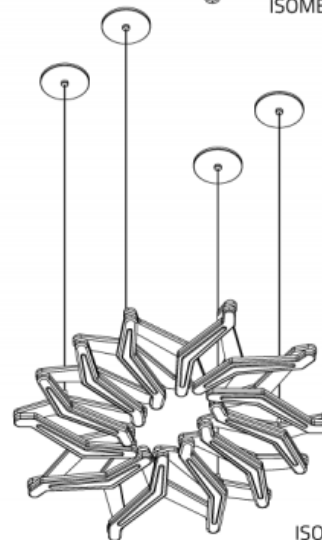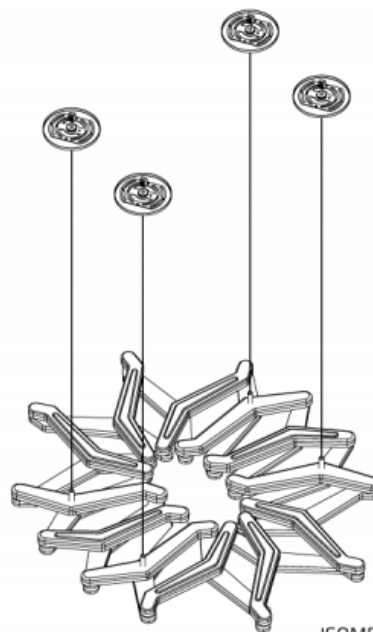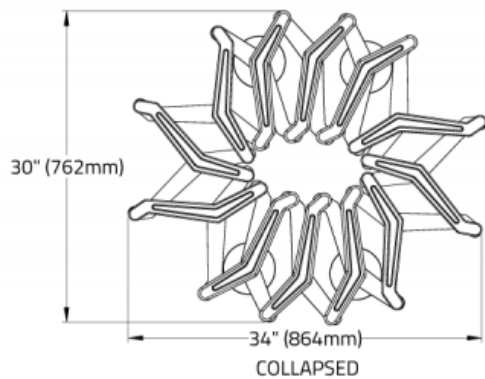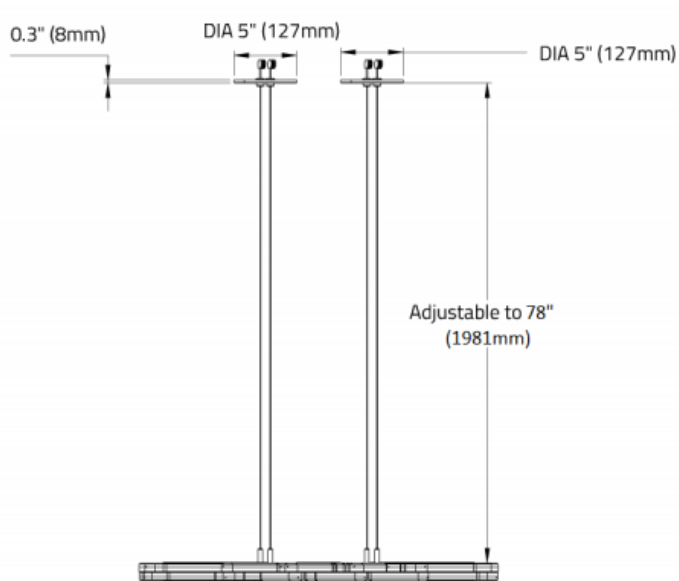

STARBURST QUAD™ - SUSPENDED

PARTIAL EXPANSION

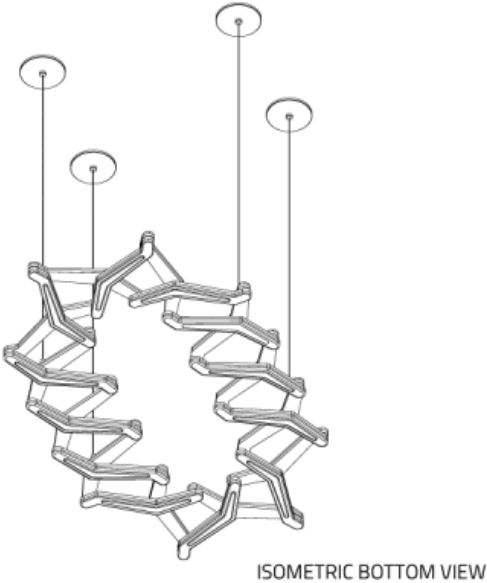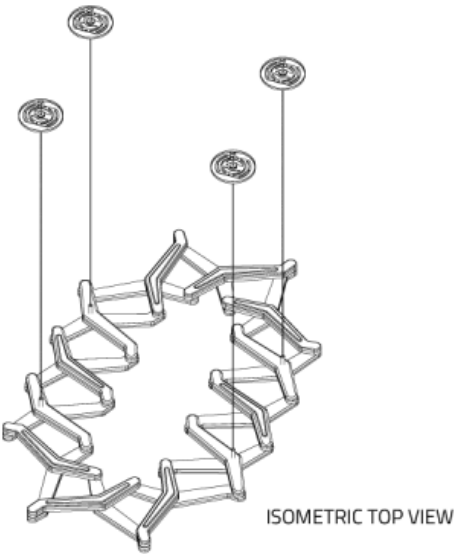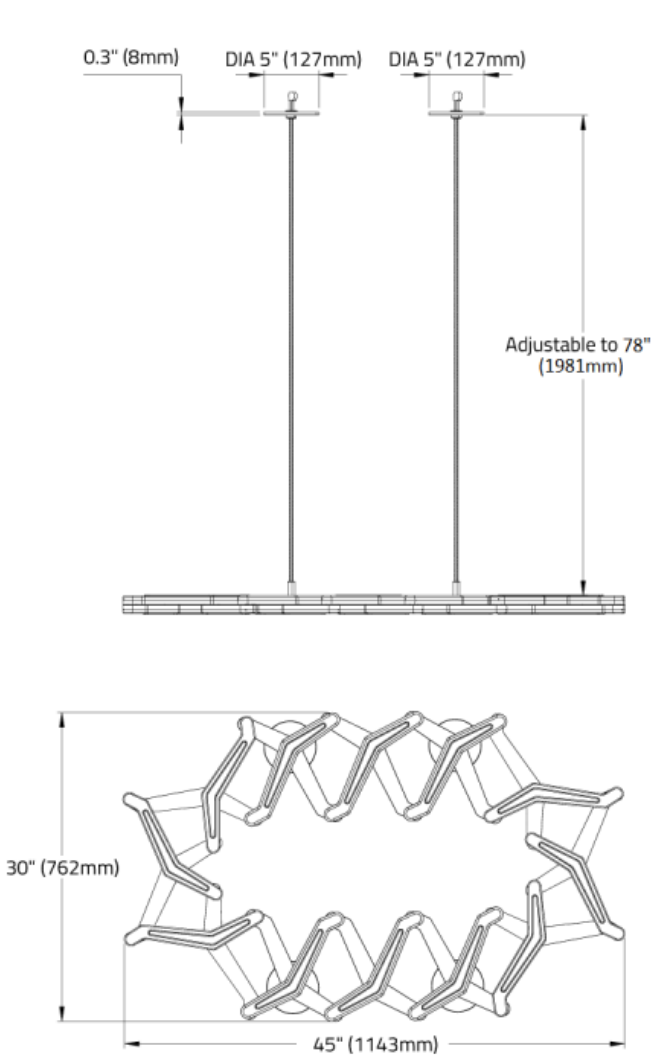

STARBURST QUAD™ - SUSPENDED

FULLY EXPANDED

