

STEP™ - RECESSED

Project Name:


Fixture Type:

Fixture Code:

Quantities:



STEP™ - RECESSED

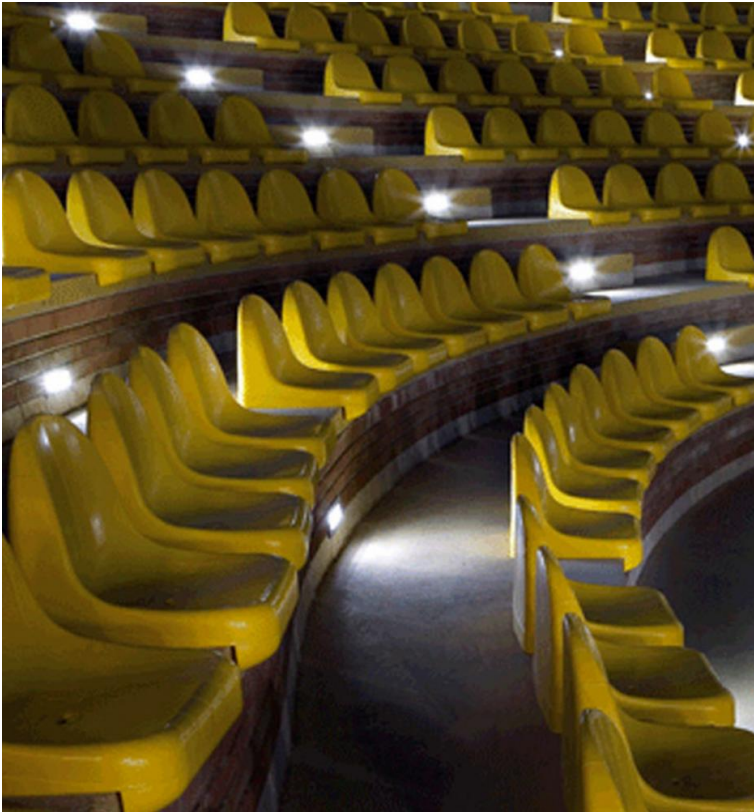

STEP™ - RECESSED

STEP is designed to blend into the architecture while illuminating steps and pathways. With asymmetric light distribution, Step makes efficient use of the light output directing it to exactly where it is required. Available in 3 polyester-based finishes, as well as Turtle-friendly, amber LED.

GENERAL SPECIFICATION

Housing

Low copper, die-cast aluminum highly resistant to oxidation.

Diffuser

4mm/0.2" tempered glass.

Cable entry

Double silicon gland for DIA 10-14mm/0.4-0.5" cables.

Drivers

HPF, electronic 120-277V.

External screws

A4 stainless steel treated with highly antioxidant water-repellent lubricating solution to ensure easy opening.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

Finish

Powder coated.

Gasket

Silicone.

Reflectors

High purity aluminum.

Rough-in housing

Thermoplastic.

Mechanical

For wall installation in poured concrete/brick.

Dark Sky Friendly

Dark Sky Friendly if ordered with 3000K CCT.

MOUNTING & OPTICS



Ext-Wall Recessed Downlight Dark Sky Friendly

STEP™ - RECESSED

HOW TO ORDER

A. LUMINAIRE

8207610 6W, 21 lms

B. CCT

30 3000K (min 80 CRI)

40 4000K (min 80 CRI)

TF Amber LED (Turtle Friendly)

C. FINISH

BL Black Metallic Textured

AG Anthracite Gray

GR Light Gray

D. DIMMING

DB Dimming (0-10V, 10%) ¹

¹ Dimming is equal to or less than 10%.

E. ROUGH-IN HOUSING (REQUIRED)

RIH6503 Rough-In Housing



STEP™ - RECESSED

TECHNICAL DATA


LUMINAIRE

| | |
|---------------|---------|
| Code | 8207610 |
| Power (LED) | 6W |
| Delivered lms | 21 |

FINISH



Black Metallic Textured



Anthracite Gray



Light Gray

APPROVALS



STEP™ - RECESSED

DIMENSIONAL DIAGRAMS

