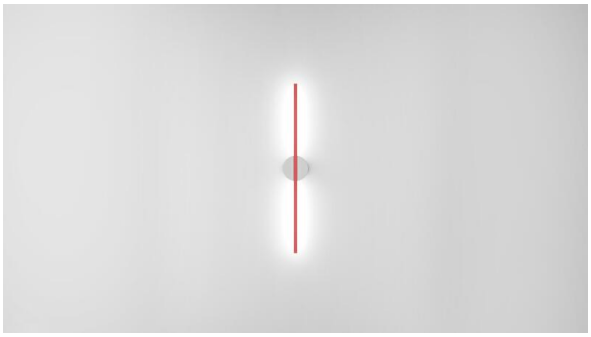
STRIPE™

FULL SPECIFICATION SHEET



FIXTURE TYPE	FIXTURE CODE	QUANTITIES

1 DESCRIPTION

STRIPE was designed as a minimalist, graphically abstract accessory for surface mounting. By combining two of the most basic geometries, a cylinder and a line, we achieved a powerful and expressive design despite its modest dimensions. The linear light source housing was kept extremely narrow and as it faces the wall or ceiling, it eliminates the need for large-surface diffusers required to achieve comfortable glare-free light. The central hub, which creates the necessary backlight offset distance, also acts as the driver compartment and because of its cylindrical form, it also allows the lamp to be oriented in any direction – vertically, horizontally or diagonally, again adding significant value to the visual appeal of the luminaire. The two part construction allows for a multitude of two-tone finish options.

2 OPTICS & FEATURES


Wall - Stripe


Ceiling - Stripe



Declare

3 APPROVALS

ADA Intertek CE DAMP LOCATION F IP20

4 GENERAL SPECIFICATION

BODY
Extruded and die-cast aluminum.

FINISH
Powder coated.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

SENSORS
Consult factory regarding sensor compatibility.

DRIVERS
Integral, HPF electronic, 120-277V (EU-240V). The driver is integral to the fixture housing.

DELIVERED LUMENS
Delivered lumen & LPW based on 4000K(min 80 CRI).

APPROVALS
ETL C/US. CE, Damp Rated.

SUSTAINABILITY
Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

LENS
Frosted acrylic.

MECHANICAL
Luminaires mount directly to a J box (by others - North America only).

REPORTED L70 @25°C (77°F)
>60,000 hrs.

DESIGN
US Pat. No. D886,356.

5 DESIGN OPTIONS

FINISH

White


Black Metallic - Textured



Silver Metallic - Textured


Gold Metallic - Textured


Wood grain - Light Cherry [1]


Wood grain - Dark Walnut [1]


Wood grain - White Oak [1]


Midnight Blue Metallic - Textured


Copper Metallic


Charcoal Metallic - Textured


Bronze Metallic - Textured


Champagne Metallic


Red Metallic - Textured

[1] Longer than normal lead times may apply, consult factory.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ARM FINISH

White


Black Metallic - Textured



Silver Metallic - Textured


Gold Metallic - Textured


Wood grain - Light Cherry [1]


Wood grain - Dark Walnut [1]


Wood grain - White Oak [1]


Midnight Blue Metallic - Textured


Copper Metallic


Charcoal Metallic - Textured


Bronze Metallic - Textured


Champagne Metallic


Red Metallic - Textured

[1] Longer than normal lead times may apply, consult factory.

6 HOW TO ORDER

LUMINAIRE

TRPE1W29 29", 900 lms
TRPE1W53 53", 1800 lms

Delivered lumens are shown at max output based on white finish. For continuous runs, consult factory.

LUMENS (INDIRECT)

LMA0075 750 lm
LMA0090 900 lm
LMA0120 1200 lm
LMA0180 1800 lm

TRPE1W29 available at 750 and 900 lms. TRPE1W53 available at 1200 and 1800 lms.

CRI

CR80 CRI 80+

CCT

CTA30 3000K
CTA35 3500K
CTA40 4000K

VOLTAGE

V1 120/277V
V2 240V [1]

[1] Not available in North America

DIMMING

DA01 0-10V Dimming 1.0%

BASE FINISH

FA01 White
FA02 Black Metallic - Textured
FA20 Silver Metallic - Textured
FA25 Gold Metallic - Textured
FA27 Wood grain - Light Cherry [1]
FA28 Wood grain - Dark Walnut [1]
FA30 Wood grain - White Oak [1]
FA44 Midnight Blue Metallic - Textured
FA45 Copper Metallic
FA46 Charcoal Metallic - Textured
FA47 Bronze Metallic - Textured
FA52 Champagne Metallic
FA53 Red Metallic - Textured

[1] Longer than normal lead times may apply, consult factory.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ARM FINISH

FB01 White
FB02 Black Metallic - Textured
FB20 Silver Metallic - Textured
FB25 Gold Metallic - Textured
FB27 Wood grain - Light Cherry [1]
FB28 Wood grain - Dark Walnut [1]
FB30 Wood grain - White Oak [1]
FB44 Midnight Blue Metallic - Textured
FB45 Copper Metallic
FB46 Charcoal Metallic - Textured
FB47 Bronze Metallic - Textured
FB52 Champagne Metallic
FB53 Red Metallic - Textured

[1] Longer than normal lead times may apply, consult factory.

7 TECHNICAL DATA

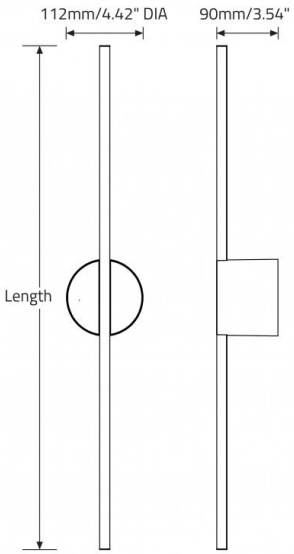
LUMINAIRE

Delivered lumens are shown at max output based on white finish. For continuous runs, consult factory.

Code	TRPE1W29	TRPE1W53
Length	29"	53"
Wattage	7W	14W
Delivered lms	900	1800
LPW Indirect	128	128

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

8 DIMENSIONAL DIAGRAMS



© 2026 Beta-Calco Inc. Specifications are subject to change without notice