






# STRIPE™


## FULL SPECIFICATION SHEET

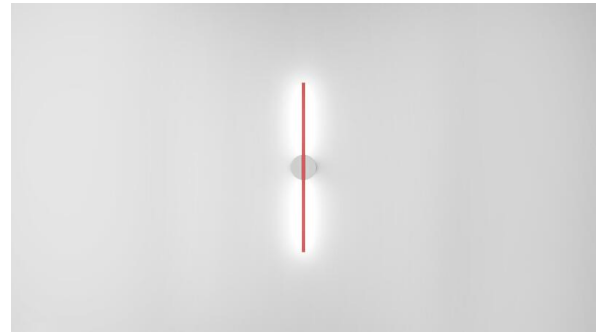

FIXTURE TYPE



FIXTURE CODE



QUANTITIES

### 1 DESCRIPTION

**STRIPE** was designed as a minimalist, graphically abstract accessory for surface mounting. By combining two of the most basic geometries, a cylinder and a line, we achieved a powerful and expressive design despite its modest dimensions. The linear light source housing was kept extremely narrow and as it faces the wall or ceiling, it eliminates the need for large-surface diffusers required to achieve comfortable glare-free light. The central hub, which creates the necessary backlight offset distance, also acts as the driver compartment and because of its cylindrical form, it also allows the lamp to be oriented in any direction – vertically, horizontally or diagonally, again adding significant value to the visual appeal of the luminaire. The two part construction allows for a multitude of two-tone finish options.

### 2 OPTICS & FEATURES



Wall - Stripe

Ceiling - Stripe

Declare.

### 3 APPROVALS



### 4 GENERAL SPECIFICATION

#### BODY

Extruded and die-cast aluminum.

#### FINISH

Powder coated.

**SENSORS**

Consult factory regarding sensor compatibility.

**DRIVERS**

Integral, HPF electronic, 120-277V (EU-240V). The driver is integral to the fixture housing.

**DELIVERED LUMENS**

Delivered lumen & LPW based on 4000K(min 80 CRI).

**APPROVALS**

ETL C/US. CE, Damp Rated.

**SUSTAINABILITY**

Designed for on-site LED board, driver, and optic replacement.

Contact the factory for maintenance documentation.

**LENS**

Frosted acrylic.

**MECHANICAL**

Luminaires mount directly to a J box (by others - North America only).

**REPORTED L70 @25°C (77°F)**

>60,000 hrs.

**DESIGN**

US Pat. No. D886,356.

**5 DESIGN OPTIONS**

**FINISH**



<sup>1</sup> Longer than normal lead times may apply, consult factory.

**ARM FINISH**



<sup>1</sup> Longer than normal lead times may apply, consult factory.

**6 HOW TO ORDER**

**1. LUMINAIRE**

**TRPE1W29** 29", 900 lms      **TRPE1W53** 53", 1800 lms

Delivered lumens are shown at max output based on white finish. For continuous runs, consult factory.

**2. LUMENS (INDIRECT)**

**LMA0075** 750 lm      **LMA0090** 900 lm      **LMA0120** 1200 lm      **LMA0180** 1800 lm

TRPE1W29 available at 750 and 900 lms. TRPE1W53 available at 1200 and 1800 lms.

**3. CRI**

**CR80** CRI 80+

**4. CCT**

**CTA30** 3000K      **CTA35** 3500K      **CTA40** 4000K

## 5. VOLTAGE

V1 120/277V

V2 240V <sup>1</sup>

<sup>1</sup> Not available in North America

## 6. DIMMING

DA01 0-10V Dimming 1.0%

## 7. BASE FINISH

FA01 White

FA02 Black Metallic - Textured

FA20 Silver Metallic - Textured

FA25 Gold Metallic - Textured

FA27 Wood grain - Light Cherry <sup>1</sup>

FA28 Wood grain - Dark Walnut <sup>1</sup>

FA30 Wood grain - White Oak <sup>1</sup>

FA44 Midnight Blue Metallic - Textured

FA45 Copper Metallic

FA46 Charcoal Metallic - Textured

FA47 Bronze Metallic - Textured

FA52 Champagne Metallic

FA53 Red Metallic - Textured

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## 8. ARM FINISH

FB01 White

FB02 Black Metallic - Textured

FB20 Silver Metallic - Textured

FB25 Gold Metallic - Textured

FB27 Wood grain - Light Cherry <sup>1</sup>

FB28 Wood grain - Dark Walnut <sup>1</sup>

FB30 Wood grain - White Oak <sup>1</sup>

FB44 Midnight Blue Metallic - Textured

FB45 Copper Metallic

FB46 Charcoal Metallic - Textured

FB47 Bronze Metallic - Textured

FB52 Champagne Metallic

FB53 Red Metallic - Textured

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## 7 TECHNICAL DATA

### LUMINAIRE

Delivered lumens are shown at max output based on white finish. For continuous runs, consult factory.

| Code          | TRPE1W29 | TRPE1W53 |
|---------------|----------|----------|
| Length        | 29"      | 53"      |
| Wattage       | 7W       | 14W      |
| Delivered lms | 900      | 1800     |
| LPW Indirect  | 128      | 128      |

8 DIMENSIONAL DIAGRAMS

