


# SWITCH™



Project Name:

Fixture Type:

Fixture Code:

Quantities:

## A. LUMINAIRE TYPE

**WTHP** Pendant

**WTHC** Ceiling

## B. DIAMETER

**SL03** 3ft, 9700 lms

**SL04** 4ft, 13000 lms

**SL05** 5ft, 16400 lms

**SL06** 6ft, 19400 lms

**SL07** 7ft, 20300 lms

## C. DISTRIBUTION

**DRO** Direct 100%

**DR2** Direct 50% / Indirect 50%

## D. NUMBER OF SECTIONS

**NS02** 2 Sections

**NS03** 3 Sections

## E. LM/FT (DIRECT)

**LPF040** 400 lm/ft<sup>1</sup>

**LPF060** 600 lm/ft<sup>1 2</sup>

**LPF080** 800 lm/ft<sup>1 2</sup>

**LPF100** 1000 lm/ft<sup>2</sup>

<sup>1</sup> 100% Direct light

<sup>2</sup> 54% Direct light/46% Indirect light

## F. CRI

**CR90** CRI 90+

## G. CCT

**CTA27** 2700K<sup>1</sup>

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

<sup>1</sup> Longer than normal lead time may apply, consult factory.

## H. VOLTAGE

**V1** 120/277V

**V2** 240V<sup>1</sup>

**V3** 347V<sup>2</sup>

**V4** Low Voltage<sup>3</sup>

<sup>1</sup> V2 not available in North America.

<sup>2</sup> V3 available with DA01 dimming only.

<sup>3</sup> V4 available with DA45 dimming only.

## I. DIMMING (REMOTE)

**DA01** 0-10V Dimming 1.0%

**DA02** 0-10V Dimming 0.1%<sup>1</sup>

**DA20** DALI Dimming 0.1%<sup>1</sup>

**DA21** DALI Dimming 1.0%<sup>1</sup>

**DA30** DSI/switchDim<sup>1 2</sup>

**DA45** PoE<sup>3</sup>

<sup>1</sup> Not available with V3 or V4.

<sup>2</sup> DA30 not available in North America

<sup>3</sup> DA45 used V4 only.



## J. SUSPENSION

**SS0** Not required

**SS6** POS Vertical, Remote driver

**SS7** POS, Hub, Remote driver <sup>1</sup>

**SS9** POS, Hub, Driver Integral to Canopy  
<sub>1 2</sub>

<sup>1</sup> Available with V1 (120V) only. The minimum suspension height relative to diameter is as follows: 3ft = 18", 4ft = 24", 5ft = 30", 6ft = 36", 7ft = 42".

<sup>2</sup> Available with V1 (120V) only.

## K. FIXTURE FINISH

**FA01** White

**FA02** Black Metallic - Textured

**FA20** Silver Metallic - Textured

**FA25** Gold Metallic - Textured

**FA44** Midnight Blue Metallic - Textured

**FA45** Copper Metallic

**FA46** Charcoal Metallic - Textured

**FA47** Bronze Metallic - Textured

**FA52** Champagne Metallic

**FA53** Red Metallic - Textured

## L. CANOPY FINISH

**CF00** Not required

**CF01** White

**CF02** Black Metallic - Textured

**CF20** Silver Metallic - Textured

**CF25** Gold Metallic - Textured

**CF44** Midnight Blue Metallic - Textured

**CF45** Copper Metallic

**CF46** Charcoal Metallic - Textured

**CF47** Bronze Metallic - Textured

**CF52** Champagne Metallic

**CF53** Red Metallic - Textured

## M. EMERGENCY

**E0** Not required

**E2** Emergency system - Remote <sup>1</sup>




<sup>1</sup> Not available in Integral or with 347V. Consult factory.

**DIMENSIONAL DIAGRAMS**

**DISTANCE TO CEILING SURFACE MOUNT**




**CROSS SECTION**

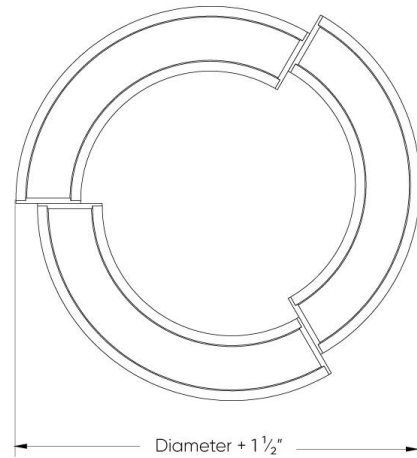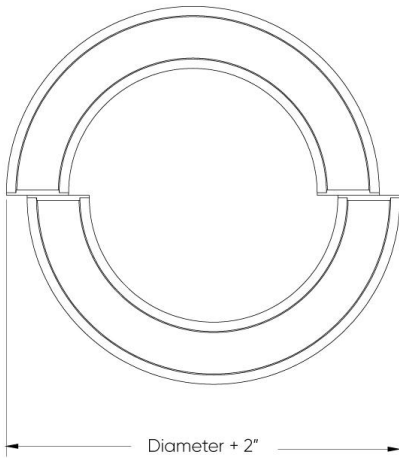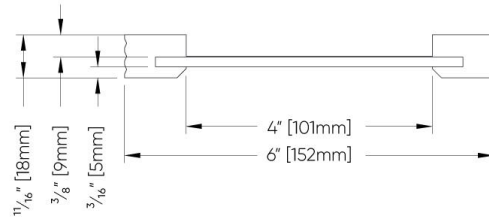


| Nominal Diameter | Actual Diameter | Minimum Suspension Height |
|------------------|-----------------|---------------------------|
| 3ft              | 38" [965mm]     | 15" [381mm]               |
| 4ft              | 50" [1270mm]    | 20" [508mm]               |
| 5ft              | 62" [1574mm]    | 25" [635mm]               |
| 6ft              | 74" [1879mm]    | 35" [889mm]               |
| 7ft              | 86" [2184mm]    | 40" [1016mm]              |

| Nominal Diameter | Actual Diameter  | Minimum Suspension Height |
|------------------|------------------|---------------------------|
| 3ft              | 37 1/2" [952mm]  | 15" [381mm]               |
| 4ft              | 49 1/2" [1257mm] | 20" [508mm]               |
| 5ft              | 61 1/2" [1562mm] | 25" [635mm]               |
| 6ft              | 73 1/2" [1866mm] | 35" [889mm]               |
| 7ft              | 85 1/2" [2171mm] | 40" [1016mm]              |


**Distance to ceiling  
Hub Mount**

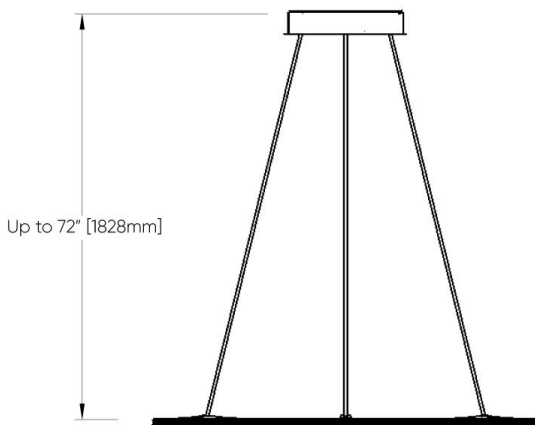


**Distance to ceiling  
Vertical Mount**

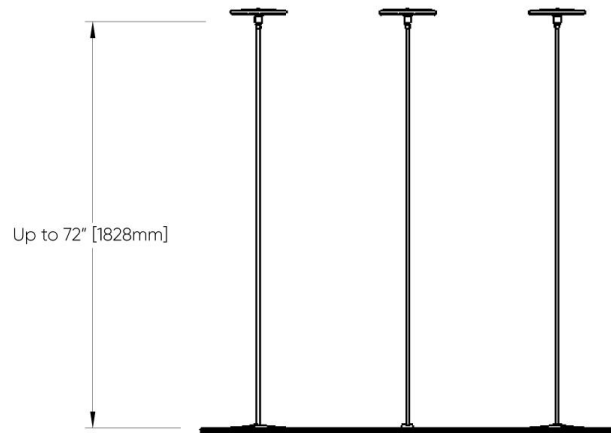

Hub Remote POS (SS7)

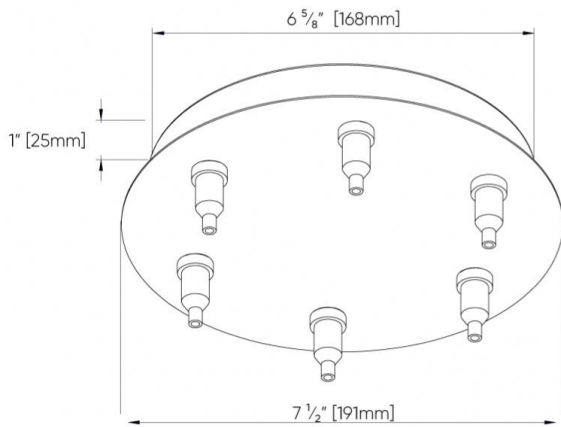

Hub Integral POS (SS9)

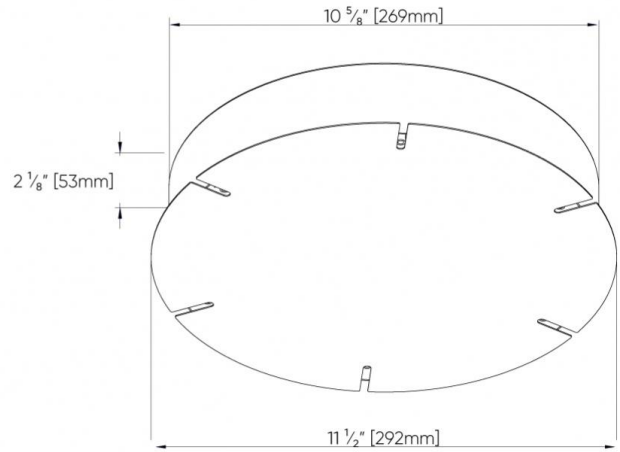

Vertical Remote POS (SS6)

