






# SWITCH BLADE™


## SHORT SPECIFICATION SHEET

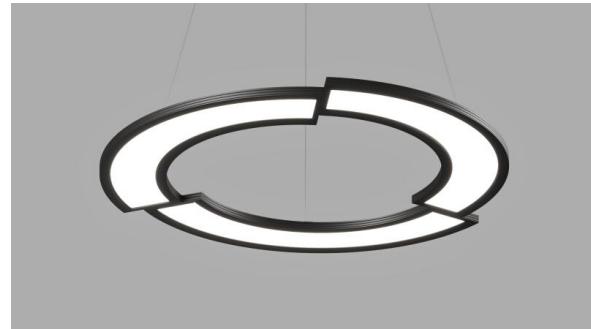

Fixture Type



Fixture Code



Quantities

**1 HOW TO ORDER****1. LUMINAIRE TYPE****WTHP** Pendant**2. DIAMETER****SL03** 3ft, 9700 lms**SL04** 4ft, 13000 lms**SL05** 5ft, 16400 lms**SL06** 6ft, 19700 lms**SL07** 7ft, 22900 lms**3. DISTRIBUTION****DR1** Direct 100%**DR2** Direct 54% / Indirect 46%

Single circuit only. Dual circuit not supported.

**4. NUMBER OF SECTIONS****NS02** 2 Sections**NS03** 3 Sections**5. LM/FT (DIRECT)****LPF040** 400 lm/ft <sup>1</sup>**LPF060** 600 lm/ft <sup>1 2 3</sup>**LPF080** 800 lm/ft <sup>1 2 4</sup>**LPF100** 1000 lm/ft <sup>2 5</sup><sup>1</sup> Available with DR1 (Direct only). <sup>2</sup> Available with DR2 (Direct/Indirect). <sup>3</sup> Based on 60% of total output (for DR2).<sup>4</sup> Based on 80% of total output (for DR2). <sup>5</sup> 100% of total output (for DR2).**6. CRI****CR90** CRI 90+**7. CCT****CTA27** 2700K**CTA30** 3000K**CTA35** 3500K**CTA40** 4000K**8. VOLTAGE****V1** 120/277V**V2** 240V <sup>1</sup>**V3** 347V <sup>2</sup>**V4** Low Voltage <sup>3</sup><sup>1</sup> V2 not available in North America. <sup>2</sup> V3 available with DA01 dimming only. <sup>3</sup> V4 available with DA45 dimming only.

## 9. DIMMING (REMOTE)

<b>DA01</b> 0-10V Dimming 1.0%	<b>DA02</b> 0-10V Dimming 0.1% <sup>1</sup>	<b>DA20</b> DALI Dimming 0.1% <sup>1</sup>	<b>DA21</b> DALI Dimming 1.0% <sup>1</sup>
<b>DA30</b> DSI/switchDim <sup>1 2</sup>	<b>DA45</b> PoE <sup>3</sup>		

<sup>1</sup> Not available with V3 or V4. <sup>2</sup> DA30 not available in North America. <sup>3</sup> DA45 used V4 only.

## 10. SUSPENSION

<b>SS0</b> Not required	<b>SS6</b> POS Vertical, Remote driver	<b>SS7</b> POS, Hub, Remote driver <sup>1</sup>	<b>SS9</b> POS, Hub, Driver Integral to Canopy <sup>1 2</sup>
-------------------------	--	---	---

<sup>1</sup> Available with V1 (120V) only. The minimum suspension height relative to diameter is as follows: 3' = 18", 4' = 24", 5' = 30", 6' = 36", 7' = 42".

<sup>2</sup> Available with V1 (120V) only.

## 11. FIXTURE FINISH

<b>FA01</b> White	<b>FA02</b> Black Metallic - Textured	<b>FA20</b> Silver Metallic - Textured	<b>FA25</b> Gold Metallic - Textured
<b>FA44</b> Midnight Blue Metallic - Textured	<b>FA45</b> Copper Metallic	<b>FA46</b> Charcoal Metallic - Textured	<b>FA47</b> Bronze Metallic - Textured
<b>FA52</b> Champagne Metallic	<b>FA53</b> Red Metallic - Textured		

## 12. CANOPY FINISH

<b>CF00</b> Not required	<b>CF01</b> White	<b>CF02</b> Black Metallic - Textured	<b>CF20</b> Silver Metallic - Textured
<b>CF25</b> Gold Metallic - Textured	<b>CF44</b> Midnight Blue Metallic - Textured	<b>CF45</b> Copper Metallic	<b>CF46</b> Charcoal Metallic - Textured
<b>CF47</b> Bronze Metallic - Textured	<b>CF52</b> Champagne Metallic	<b>CF53</b> Red Metallic - Textured	

## 13. EMERGENCY

<b>E0</b> Not required	<b>E2</b> Emergency system - Remote <sup>1</sup>
------------------------	--

<sup>1</sup> Not available in Integral or with 347V. Consult factory.