Project Name: Fixture Type:

Fixture Code: Quantities:











So much can be done with **TIMPANI RD**. The disc is a perennial classic in architectural design due to its versatile look. It is minimalist, elegant, bold, graceful, or fun; it can blend in or make a statement. **TIMPANI RD** complements a wide range of design expressions, supported by 10 finish options, multiple sizes, and lumen packages to achieve the desired illumination. This luminaire is capable of hitting lumen outputs up to 24,000 lumens, making it a high-performance fixture.

GENERAL SPECIFICATION

Body and trim

Steel and aluminum.

Lens

Opal polycarbonate.

Integral Emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

PoE

Timpani RD can integrate into your data network via Power over Ethernet (PoE) connectivity.

PoE

Reported L70 @25°C (77°F)

> 50,000 hrs.

OPTICS & FEATURES







Declare

Finish

Powder coated.

Sensors

Consult factory regarding sensor compatibility.

Drivers

Integral, HPF electronic drivers for 120-277V, 347V (EU-240V). The driver is integral in the fixture housing.

Delivered Lumens

Delivered lumens & LPW based on 4000K (min 80 CRI).

Approvals

Damp Rated.



HOW TO ORDER

A. LUMINAIRE

TMRC1C01 18", 3200 lms **TMRC1C02** 24", 5300 lms **TMRC1C03** 36", 13000 lms **TMRC1C04** 48", 24000 lms

B. LUMENS

 LMA0170 1700 lms
 LMA0250 2500 lms
 LMA0320 3200 lms
 LMA0420 4200 lms

 LMA0530 5300 lms
 LMA0730 7300 lms
 LMA1060 10600 lms
 LMA1300 13000 lms

LMA1900 19000 lms **LMA2400** 24000 lms

Consult website for lumens by size.

C. CRI

CR80 CRI 80+

D. CCT

E. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ² **V4** Low Voltage ³

F. DIMMING OPTIONS

DA01 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% ¹³ **DA21** DALI Dimming 1.0% ¹³ **DA30** DSI/switchDim ²³

DA45 PoE *

G. FINISH

FA01 White FA02 Black Metallic - Textured FA20 Silver Metallic - Textured FA44 Midnight Blue Metallic - Textured FA45 Gold Metallic - Textured FA45 Copper Metallic FA46 Charcoal Metallic - Textured FA47 Bronze Metallic - Textured

FA52 Champagne Metallic **FA53** Red Metallic - Textured

Other finishes available, consult factory.

H. EMERGENCY

E0 Not required **E1** Emergency system - Integral

¹ Not available in North America.

² Only avaialble with DA01 dimming.

³ Only available with DA45 dimming.

¹ Available with 18" & 24" diameters only.

² Not available in North America.

³ Not available with V3.


^{*} Only available with V4.

TECHNICAL DATA

LUMINAIRE

Code	TMRC1C01	TMRC1C02	TMRC1C03	TMRC1C04
Diameter (A)	18"	24"	36"	48"
Wattage	34	51	132	239
Delivered Ims	3200	5300	13000	24000
LPW	94	103	102	101

FIXTURE FINISH

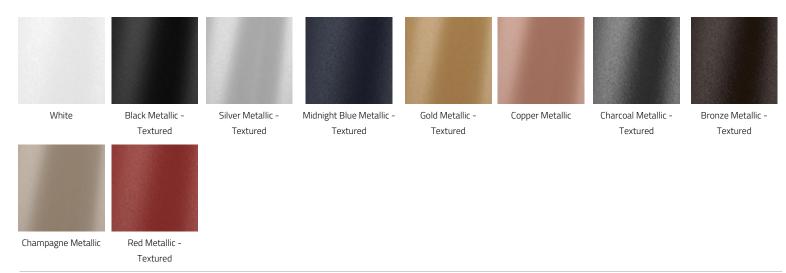

Other finishes available, consult factory.

APPROVALS









DIMENSIONAL DIAGRAMS

