

# TIMPANI RD™ - CEILING

Project Name:

Fixture Type:

Fixture Code:

Quantities:



# TIMPANI RD™ - CEILING



# TIMPANI RD™ - CEILING

So much can be done with **TIMPANI RD**. The disk is a perennial classic in architectural design due to its versatile look. It is minimalist, elegant, bold, graceful, or fun; it can blend in or make a statement. Any feeling or style can be attributed to **TIMPANI RD**, especially with a variety of finish options, sizes, and lumen packages to attain the ideal level of illumination.

## GENERAL SPECIFICATION

### Body and trim

Steel and aluminum.

### Diffusers

Opal polycarbonate.

### Integral Emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

### PoE

Timpani RD can integrate into your data network via Power over Ethernet (PoE) connectivity.

### Reported L70 @25°C (77°F)

> 50,000 hrs.

### Finish

Powder coated.

### Sensors

Consult factory regarding sensor compatibility.

### Drivers

Integral, HPF electronic drivers for 120-277V, 347V (EU-240V). The driver is integral in the fixture housing.

### Delivered Lumens

Delivered lumens & LPW based on 4000K (min 80 CRI).

### Approvals

Damp Rated.

## MOUNTING & OPTICS



Ceiling Direct



Declare



PoE

# TIMPANI RD™ - CEILING

## HOW TO ORDER

### A. LUMINAIRE

**TMRC1C01** 18", 3200 lms

**TMRC1C02** 24", 5300 lms

**TMRC1C03** 36", 13000 lms

**TMRC1C04** 48", 24000 lms

### B. LUMENS

**LMA0170** 1700 lms

**LMA0250** 2500 lms

**LMA0320** 3200 lms

**LMA0420** 4200 lms

**LMA0530** 5300 lms

**LMA0730** 7300 lms

**LMA1060** 10600 lms

**LMA1300** 13000 lms

**LMA1900** 19000 lms

**LMA2400** 24000 lms

Consult website for lumens by size.

### C. CRI

**CR80** CRI 80+

### D. CCT

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

### E. VOLTAGE

**V1** 120/277V

**V2** 240V<sup>1</sup>

**V3** 347V<sup>2</sup>

**V4** Low Voltage<sup>3</sup>

<sup>1</sup> Not available in North America.

<sup>2</sup> Only available with DA01 dimming.

<sup>3</sup> Only available with DA45 dimming.

### F. DIMMING OPTIONS

**DA01** 0-10V Dimming 1.0%

**DA02** 0-10V Dimming 0.1%<sup>1 3</sup>

**DA21** DALI Dimming 1.0%<sup>1 3</sup>

**DA30** DSI/switchDim<sup>2 3</sup>

**DA45** PoE \*

<sup>1</sup> Available with 18" & 24" diameters only.

<sup>2</sup> Not available in North America.

<sup>3</sup> Not available with V3.

\* Only available with V4.

### G. FINISH

**FA01** White

**FA02** Black Metallic - Textured

**FA20** Silver Metallic - Textured

**FA44** Midnight Blue Metallic - Textured

**FA25** Gold Metallic - Textured

**FA45** Copper Metallic

**FA46** Charcoal Metallic - Textured

**FA47** Bronze Metallic - Textured

**FA52** Champagne Metallic

**FA53** Red Metallic - Textured

Other finishes available, consult factory.

### H. EMERGENCY

**E0** Not required

**E1** Emergency system - Integral




# TIMPANI RD™ - CEILING

## TECHNICAL DATA

### LUMINAIRE

Code	TMRC1C01	TMRC1C02	TMRC1C03	TMRC1C04
Diameter (A)	18"	24"	36"	48"
Wattage	34	51	132	239
Delivered lms	3200	5300	13000	24000
LPW	94	103	102	101

### FIXTURE FINISH

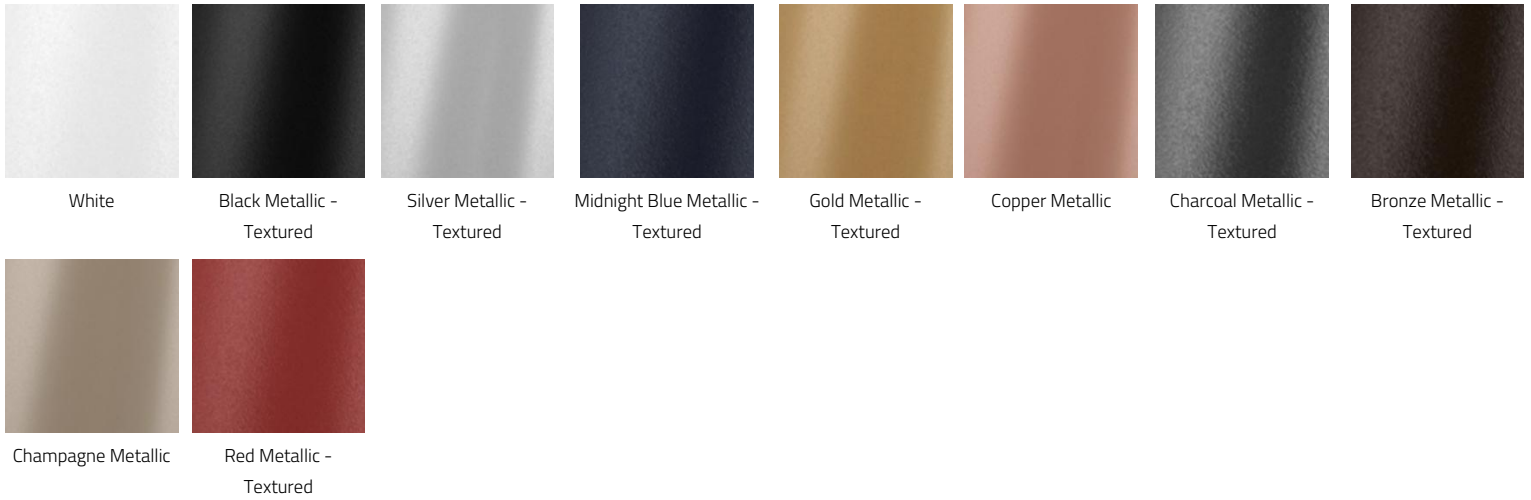

Other finishes available, consult factory.

### APPROVALS



# TIMPANI RD™ - CEILING

## DIMENSIONAL DIAGRAMS

