



# TIMPANI SQ™ - CEILING

Project Name:	Fixture Type:
Fixture Code:	Quantities:

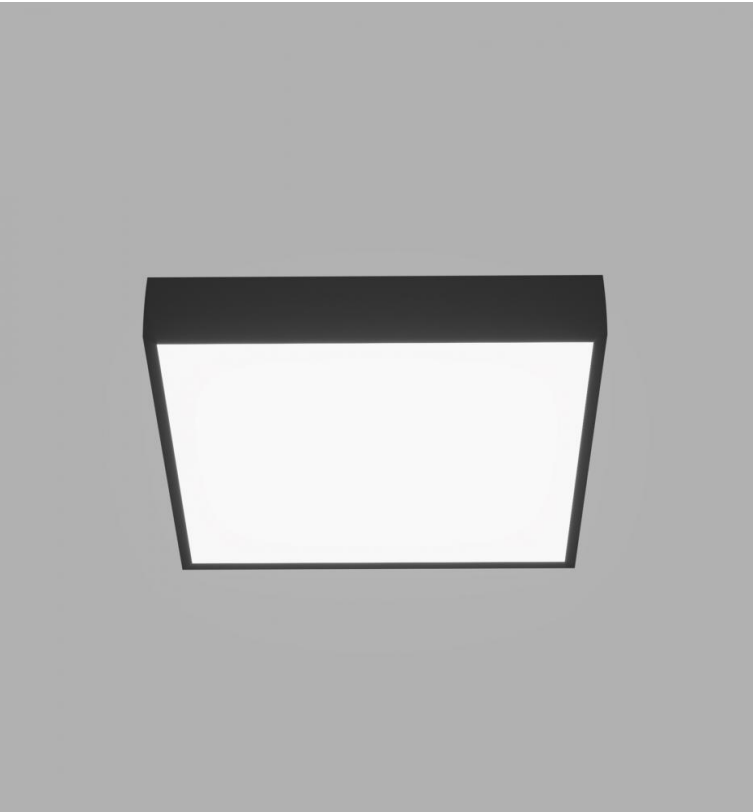

TIMPANI SQ™ - CEILING

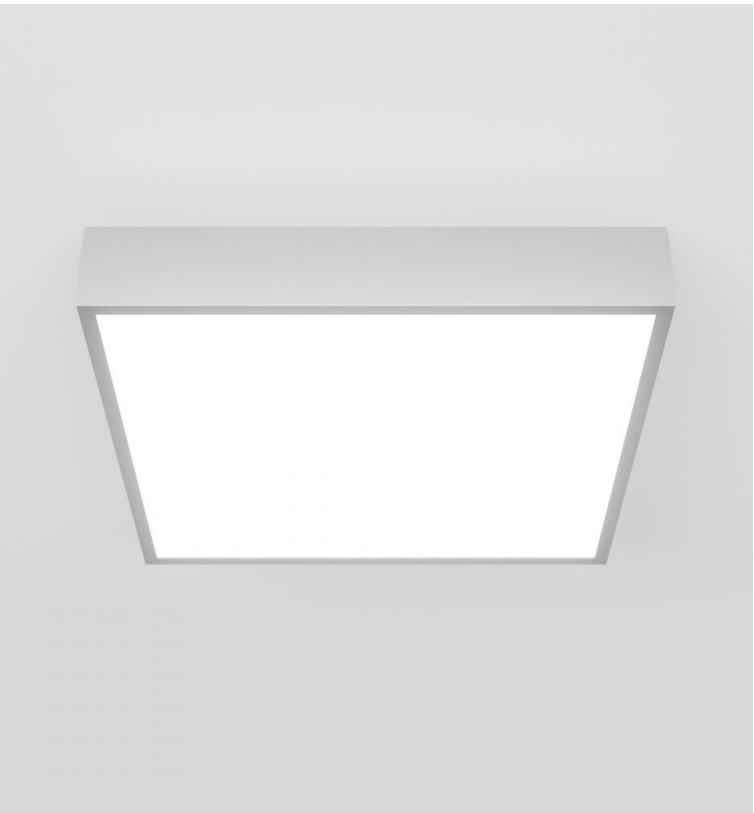

# TIMPANI SQ™ - CEILING

**TIMPANI SQ** communicates strength, reliability, and efficiency. This classic architectural square is a powerful ambient light, delivering up to 25,500 lumens, with various lumen packages available to provide the ideal light level for your space. **TIMPANI SQ** can now integrate into your data network via Power over Ethernet (PoE) connectivity. With 10 finish options, multiple sizes, and a range of lumen packages, **TIMPANI SQ** can be tailored to achieve the perfect illumination for any environment.

## GENERAL SPECIFICATION

### Body and trim

Aluminum.

### Lens

Opal polycarbonate

### Integral Emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

### PoE

Timpani SQ can integrate into your data network via Power over Ethernet (PoE) connectivity.

### Delivered Lumens

Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.

### Approvals

Damp Rated.

### Finish

Powder coated.

### Reported L70 @25°C (77°F)

> 50,000 hrs.

### Drivers

Integral, HPF electronic drivers for 120-277V (EU-240V). The driver is integral to the fixture housing.

### Mechanical

Luminaires mount directly over J box (by others - North America only).


### Sensors

Consult factory regarding sensor compatibility.


## OPTICS & FEATURES



Ceiling



Direct



Declare



PoE



# TIMPANI SQ™ - CEILING

## HOW TO ORDER

### A. LUMINAIRE

**973320** 24", 4991 lms                      **973330** 36", 13279 lms                      **973340** 48", 25532 lms

### B. CCT

**30** 3000K (min 80 CRI)                      **35** 3500K (min 80 CRI)                      **40** 4000K (min 80 CRI)

### C. FINISH

<b>WH</b> White	<b>BL</b> Black Metallic Textured	<b>MS</b> Silver Metallic Textured	<b>FA44</b> Midnight Blue Metallic - Textured
<b>FA25</b> Gold Metallic - Textured	<b>FA45</b> Copper Metallic	<b>FA46</b> Charcoal Metallic - Textured	<b>FA47</b> Bronze Metallic - Textured
<b>FA52</b> Champagne Metallic	<b>FA53</b> Red Metallic - Textured		

### D. LUMEN & WATTAGE REDUCTION

<b>PRO</b> Lumen & Wattage Reduction to approximately 25% of standard output	<b>PR1</b> Lumen & Wattage Reduction to approximately 50% of standard output	<b>PR2</b> Lumen Wattage & Reduction to approximately 75% of standard output
--	--	--

*Note: Custom Reduction Percentages Available Upon Request.*

### E. DIMMING OPTIONS

<b>D1</b> 0-10V Dimming (1%)	<b>D2</b> 0-10V Dimming 0.1% <sup>1</sup>	<b>DL</b> DALI Dimming (1%)	<b>DS</b> DSI (EU only) <sup>2</sup>
<b>SD</b> SwitchDim (EU only) <sup>2</sup>	<b>DE</b> PoE <sup>3</sup>		

0-10V, 1% dimming standard.  
<sup>1</sup> available with 24" (610mm) diameters only.  
<sup>2</sup> DS & SD options not available in North America.  
<sup>3</sup> DE must be used with EV only.

### F. OPTIONAL LOW VOLTAGE

**EV** Low Voltage

To be used with DE only.


# TIMPANI SQ™ - CEILING

## TECHNICAL DATA


### LUMINAIRE

Code	973320	973330	973340
Square (A)	24"	36"	48"
Power	36W	90W	168W
Delivered lms	4991	13279	25532
LPW	141	147	152


### FINISH




White




Black Metallic  
Textured




Silver Metallic  
Textured




Midnight Blue Metallic -  
Textured




Gold Metallic -  
Textured




Copper Metallic




Charcoal Metallic -  
Textured



Bronze Metallic -  
Textured



Champagne Metallic



Red Metallic -  
Textured

### APPROVALS











# TIMPANI SQ™ - CEILING

## DIMENSIONAL DIAGRAMS

