




TIMPANI SQ™

FULL SPECIFICATION SHEET

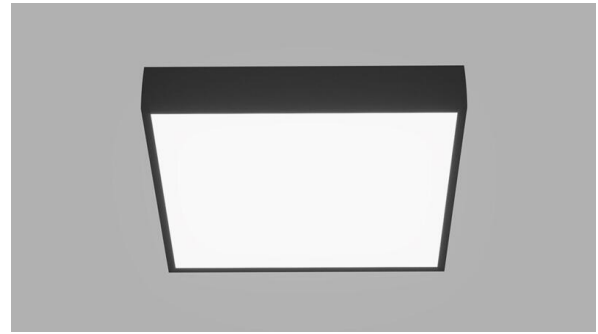

FIXTURE TYPE



FIXTURE CODE




QUANTITIES

1 DESCRIPTION

TIMPANI SQ communicates strength, reliability, and efficiency. This classic architectural square is a powerful ambient light, delivering up to 25,500 lumens, with various lumen packages available to provide the ideal light level for your space. **TIMPANI SQ** can now integrate into your data network via Power over Ethernet (PoE) connectivity. With 10 finish options, multiple sizes, and a range of lumen packages, **TIMPANI SQ** can be tailored to achieve the perfect illumination for any environment.

2 OPTICS & FEATURES

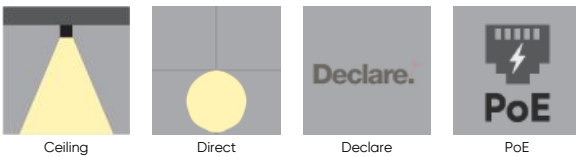

3 APPROVALS



4 GENERAL SPECIFICATION

BODY AND TRIM

Aluminum.

FINISH

Powder coated.

LENS

Opal polycarbonate

REPORTED L70 @25°C(77°F)

> 50,000 hrs.

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

DRIVERS

Integral, HPF electronic drivers for 120-277V (EU-240V). The driver is integral to the fixture housing.

POE

Timpani SQ can integrate into your data network via Power over Ethernet (PoE) connectivity.

MECHANICAL

Luminaires mount directly over J box (by others - North America only).

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.

SENSORS

Consult factory regarding sensor compatibility.

APPROVALS

Damp Rated.

SUSTAINABILITY


Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

5 DESIGN OPTIONS

FINISH




White



Black
Metallic
Textured




Silver
Metallic
Textured




Midnight
Blue Metallic
- Textured



Gold Metallic
- Textured



Copper
Metallic




Charcoal
Metallic -
Textured



Bronze
Metallic -
Textured



Champagne
Metallic



Red Metallic
- Textured

6 HOW TO ORDER

<p>LUMINAIRE</p> <p>973320 24", 4991 lms 973330 36", 13279 lms 973340 48", 25532 lms</p>	<p>CCT</p> <p>30 3000K (min 80 CRI) 35 3500K (min 80 CRI) 40 4000K (min 80 CRI)</p>	<p>FINISH</p> <p>WH White BL Black Metallic Textured MS Silver Metallic Textured FA44 Midnight Blue Metallic - Textured FA25 Gold Metallic - Textured FA45 Copper Metallic FA46 Charcoal Metallic - Textured FA47 Bronze Metallic - Textured FA52 Champagne Metallic FA53 Red Metallic - Textured</p>	
<p>LUMEN & WATTAGE REDUCTION</p> <p>PRO Lumen & Wattage Reduction to approximately 25% of standard output PR1 Lumen & Wattage Reduction to approximately 50% of standard output PR2 Lumen Wattage & Reduction to approximately 75% of standard output</p> <p>Note: Custom Reduction Percentages Available Upon Request.</p>		<p>DIMMING OPTIONS</p> <p>D1 0-10V Dimming 1% D2 0-10V Dimming 0.1%¹ DL DALI Dimming 1% DS DSI (EU only)² SD SwitchDim (EU only)² DE PoE³</p> <p>0-10V, 1% dimming standard. ¹ Available with 24" (610mm) diameters only. ² DS & SD options not available in North America. ³ DE must be used with EV only.</p>	<p>OPTIONAL LOW VOLTAGE</p> <p>EV Low Voltage To be used with DE only.</p>

7 TECHNICAL DATA

LUMINAIRE

Code	973320	973330	973340
Square (A)	24"	36"	48"
Power	36W	90W	168W
Delivered lms	4991	13279	25532
LPW	141	147	152

8 DIMENSIONAL DIAGRAMS

