



TIMPANI SQ™ - CEILING

Project Name:	Fixture Type:
Fixture Code:	Quantities:

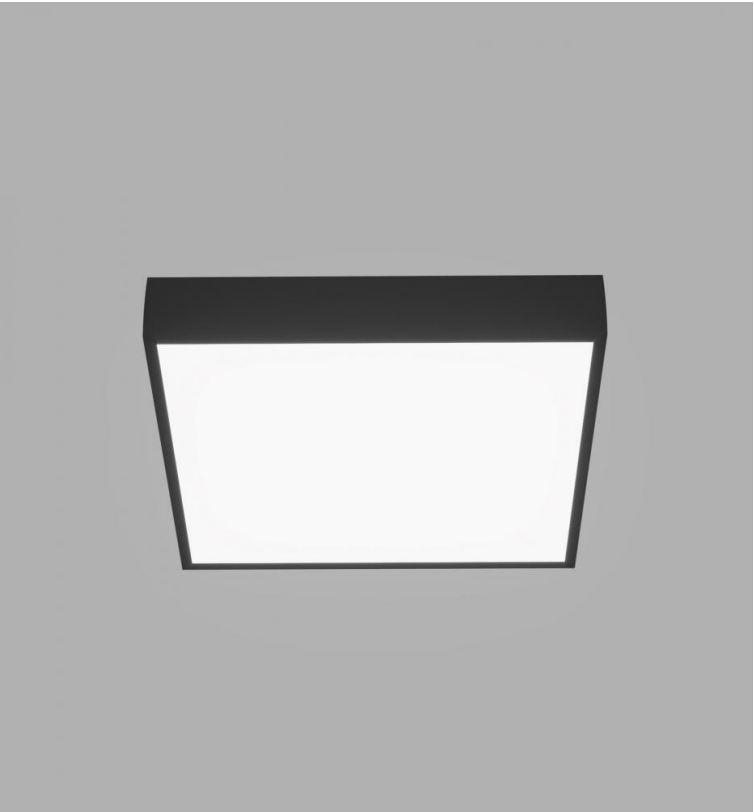

TIMPANI SQ™ - CEILING

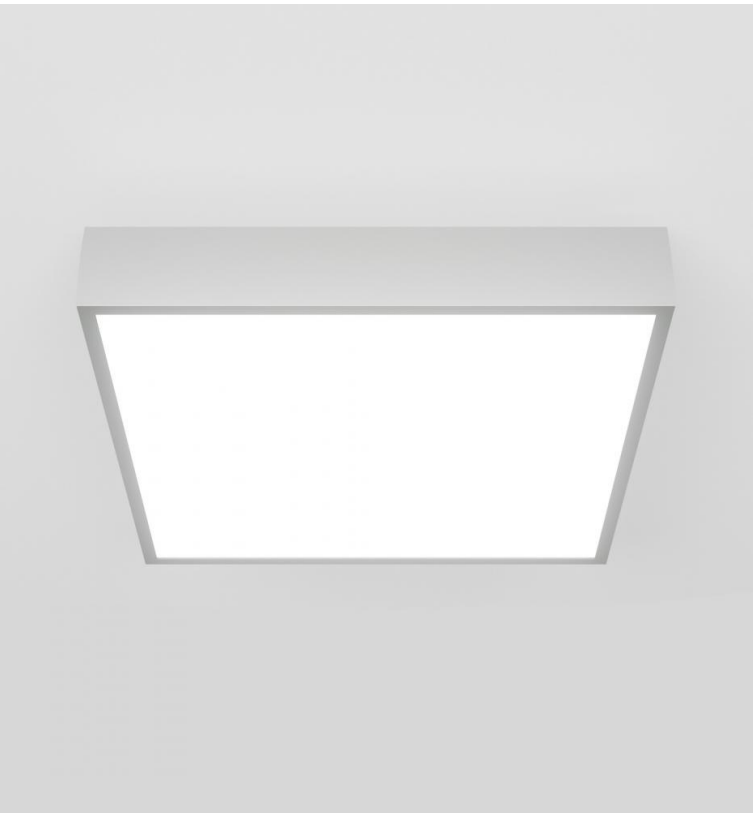

TIMPANI SQ™ - CEILING

TIMPANI SQ communicates strength, reliability, and efficiency. This classic architectural square is a powerful ambient light, delivering up to 25,500 lumens, with various lumen packages available to provide the ideal light level for your space. Now PoE compatible.

GENERAL SPECIFICATION

Body and trim

Aluminum.

Diffusers

Opal polycarbonate

Integral Emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

PoE

Timpani SQ can integrate into your data network via Power over Ethernet (PoE) connectivity.

Delivered Lumens

Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.

Approvals

Damp Rated.

Finish

Powder coated.

Reported L70 @25°C (77°F)

> 50,000 hrs.

Drivers

Integral, HPF electronic drivers for 120-277V (EU-240V). The driver is integral to the fixture housing.

Mechanical

Luminaires mount directly over J box (by others - North America only).


Sensors

Consult factory regarding sensor compatibility.

MOUNTING & OPTICS



Ceiling



Direct



Declare



PoE



TIMPANI SQ™ - CEILING

HOW TO ORDER

A. LUMINAIRE

973320 24", 4991 lms	973330 36", 13279 lms	973340 48", 25532 lms
-----------------------------	------------------------------	------------------------------

B. CCT

30 3000K (min 80 CRI)	35 3500K (min 80 CRI)	40 4000K (min 80 CRI)
------------------------------	------------------------------	------------------------------

C. FINISH

WH White	BL Black Metallic Textured	MS Silver Metallic Textured	FA44 Midnight Blue Metallic - Textured
FA25 Gold Metallic - Textured	FA45 Copper Metallic	FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured
FA52 Champagne Metallic	FA53 Red Metallic - Textured		

D. LUMEN & WATTAGE REDUCTION

PRO Lumen & Wattage Reduction to approximately 25% of standard output	PR1 Lumen & Wattage Reduction to approximately 50% of standard output	PR2 Lumen Wattage & Reduction to approximately 75% of standard output
--	--	--

Note: Custom Reduction Percentages Available Upon Request.

E. DIMMING OPTIONS

D1 0-10V Dimming (1%)	D2 0-10V Dimming 0.1% ¹	DL DALI Dimming (1%)	DS DSI (EU only) ²
SD SwitchDim (EU only) ²	DE PoE ³		

0-10V, 1% dimming standard.

¹ available with 24" (610mm) diameters only.

² DS & SD options not available in North America.

³ DE must be used with EV only.

F. OPTIONAL LOW VOLTAGE

EV Low Voltage

To be used with DE only.


TIMPANI SQ™ - CEILING

TECHNICAL DATA


LUMINAIRE

Code	973320	973330	973340
Square (A)	24"	36"	48"
Power	36W	90W	168W
Delivered lms	4991	13279	25532
LPW	141	147	152


FINISH




White




Black Metallic
Textured




Silver Metallic
Textured




Midnight Blue Metallic -
Textured




Gold Metallic -
Textured




Copper Metallic




Charcoal Metallic -
Textured



Bronze Metallic -
Textured



Champagne Metallic



Red Metallic -
Textured

APPROVALS











TIMPANI SQ™ - CEILING

DIMENSIONAL DIAGRAMS

