

# TIMPANI SQ™ - CEILING

Project Name:



Fixture Type:

Fixture Code:

Quantities:



# TIMPANI SQ™ - CEILING

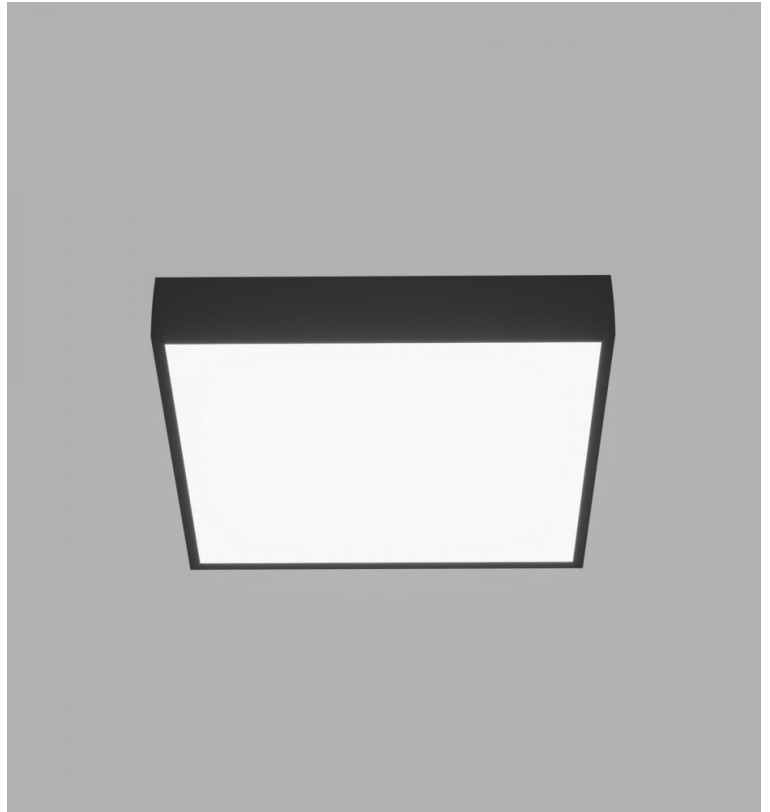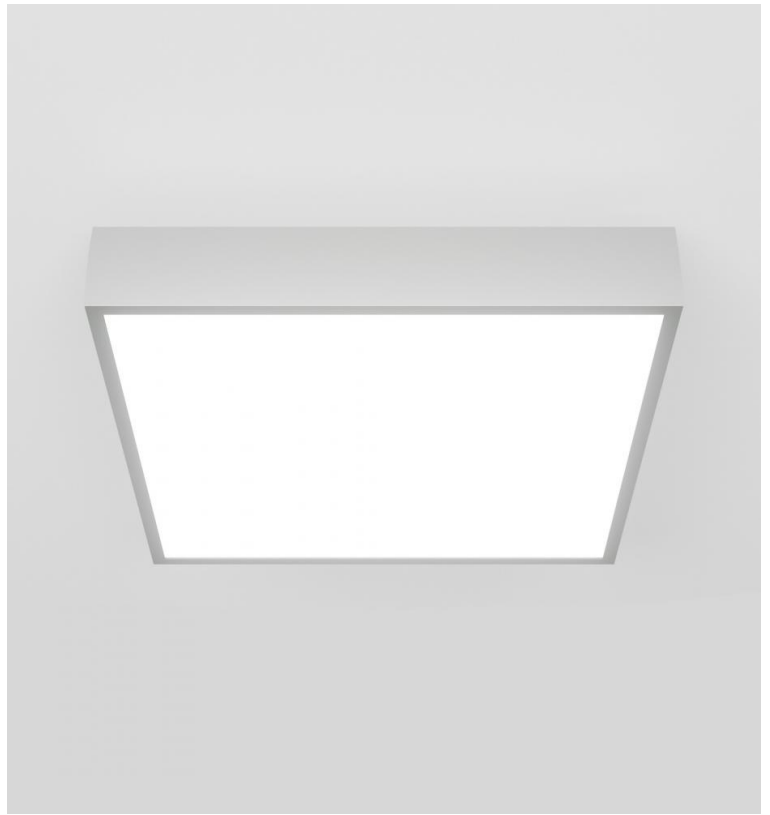

# TIMPANI SQ™ - CEILING

**TIMPANI SQ** communicates strength, reliability, and efficiency. This classic architectural square is a powerful ambient light, delivering up to 25,500 lumens, with various lumen packages available to provide the ideal light level for your space. Now PoE compatible.

## GENERAL SPECIFICATION

### Body and trim

Aluminum.

### Diffusers

Opal polycarbonate

### Integral Emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

### PoE

Timpani SQ can integrate into your data network via Power over Ethernet (PoE) connectivity.

### Delivered Lumens

Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.

### Approvals

Damp Rated.

### Finish

Powder coated.

### Reported L70 @25°C (77°F)

> 50,000 hrs.

### Drivers

Integral, HPF electronic drivers for 120-277V (EU-240V). The driver is integral to the fixture housing.

### Mechanical

Luminaires mount directly over J box (by others - North America only).


### Sensors

Consult factory regarding sensor compatibility.

## MOUNTING & OPTICS



Ceiling



Direct



Declare



PoE

# TIMPANI SQ™ - CEILING

## HOW TO ORDER

### A. LUMINAIRE

**973320** 24", 4991 lms

**973330** 36", 13279 lms

**973340** 48", 25532 lms

### B. CCT

**30** 3000K (min 80 CRI)

**35** 3500K (min 80 CRI)

**40** 4000K (min 80 CRI)

### C. FINISH

**WH** White

**BL** Black Metallic Textured

**MS** Silver Metallic Textured

**FA44** Midnight Blue Metallic - Textured

**FA25** Gold Metallic - Textured

**FA45** Copper Metallic

**FA46** Charcoal Metallic - Textured

**FA47** Bronze Metallic - Textured

**FA52** Champagne Metallic

**FA53** Red Metallic - Textured

### D. LUMEN & WATTAGE REDUCTION

**PRO** Lumen & Wattage Reduction to approximately 25% of standard output

**PR1** Lumen & Wattage Reduction to approximately 50% of standard output

**PR2** Lumen Wattage & Reduction to approximately 75% of standard output

*Note: Custom Reduction Percentages Available Upon Request.*

### E. DIMMING OPTIONS

**D1** 0-10V Dimming (1%)

**D2** 0-10V Dimming 0.1%<sup>1</sup>

**DL** DALI Dimming (1%)

**DS** DSI (EU only)<sup>2</sup>

**SD** SwitchDim (EU only)<sup>2</sup>

**DE** PoE<sup>3</sup>

0-10V, 1% dimming standard.

<sup>1</sup> available with 24" (610mm) diameters only.

<sup>2</sup> DS & SD options not available in North America.

<sup>3</sup> DE must be used with EV only.

### F. OPTIONAL LOW VOLTAGE

**EV** Low Voltage

To be used with DE only.




# TIMPANI SQ™ - CEILING

## TECHNICAL DATA

### LUMINAIRE

<b>Code</b>	<b>973320</b>	<b>973330</b>	<b>973340</b>
<b>Square (A)</b>	24"	36"	48"
<b>Power</b>	36W	90W	168W
<b>Delivered lms</b>	4991	13279	25532
<b>LPW</b>	141	147	152

## FINISH

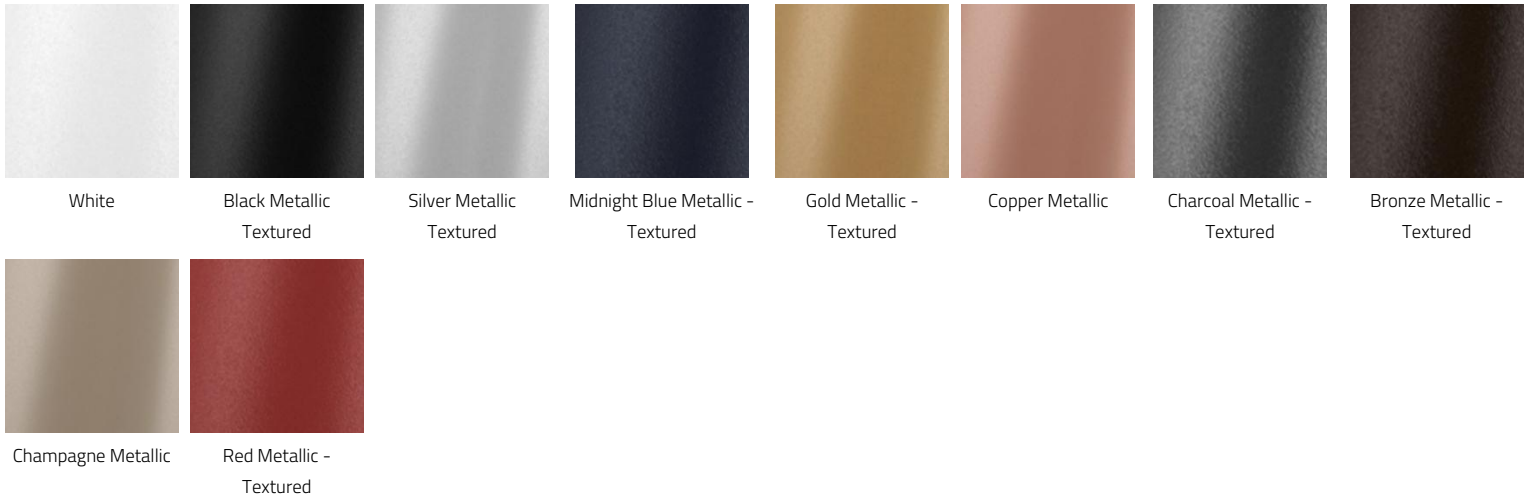

## APPROVALS



# TIMPANI SQ™ - CEILING

## DIMENSIONAL DIAGRAMS

