
Project Name: Fixture Type:

Fixture Code: Quantities:



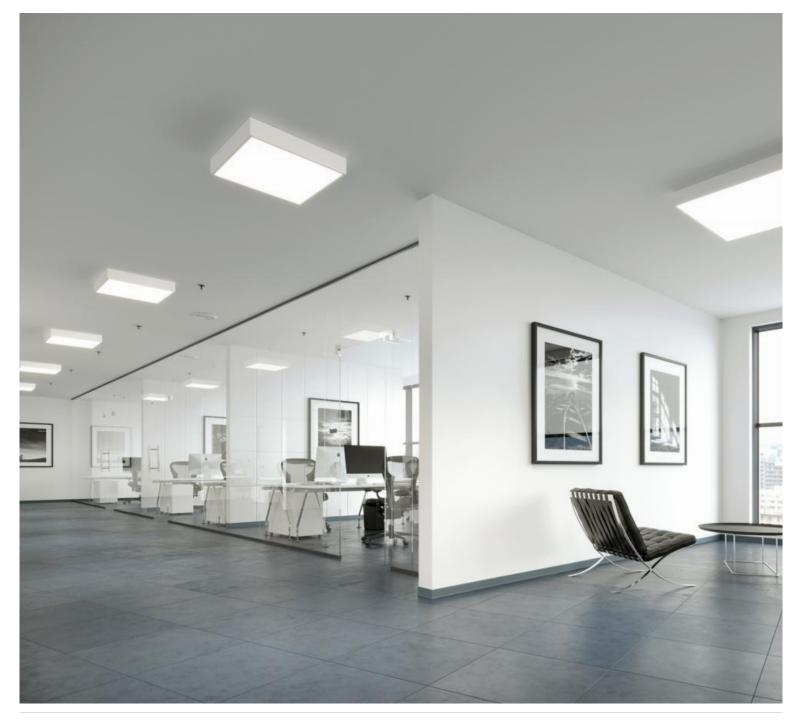

**TIMPANI SQ** communicates strength, reliability, and efficiency. This classic architectural square is a powerful ambient light, delivering up to 25,500 lumens, with various lumen packages available to provide the ideal light level for your space. Now PoE compatible.

#### **GENERAL SPECIFICATION**

#### Body and trim

Aluminum.

#### Lens

Opal polycarbonate

## Integral Emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

#### PoE

Timpani SQ can integrate into your data network via Power over Ethernet (PoE) connectivity.

#### **Delivered Lumens**

Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.

### **Approvals**

Damp Rated.

## **OPTICS & FEATURES**









#### Finish

Powder coated.

### Reported L70 @25°C (77°F)

> 50,000 hrs.

#### **Drivers**

Integral, HPF electronic drivers for 120-277V (EU-240V). The driver is integral to the fixture housing.

#### Mechanical

Luminaires mount directly over J box (by others - North America only).

#### Sensors

Consult factory regarding sensor compatibility.

### **HOW TO ORDER**

#### A. LUMINAIRE

**973320** 24", 4991 lms **973330** 36", 13279 lms **973340** 48", 25532 lms

B. CCT

**30** 3000K (min 80 CRI) **35** 3500K (min 80 CRI) **40** 4000K (min 80 CRI)

C. FINISH

WH White BL Black Metallic Textured MS Silver Metallic Textured FA44 Midnight Blue Metallic - Textured FA25 Gold Metallic - Textured FA45 Copper Metallic FA46 Charcoal Metallic - Textured FA47 Bronze Metallic - Textured

**FA52** Champagne Metallic **FA53** Red Metallic - Textured

**D. LUMEN & WATTAGE REDUCTION** 

PRO Lumen & Wattage Reduction to approximately 25% of standard output

PR1 Lumen & Wattage Reduction to approximately 50% of standard output

PR2 Lumen Wattage & Reduction to approximately 75% of standard output

Note: Custom Reduction Percentages Available Upon Request.

### **E. DIMMING OPTIONS**

**D1** 0-10V Dimming (1%) **D2** 0-10V Dimming 0.1% ¹ **DL** DALI Dimming (1%) **DS** DSI (EU only) ²

**SD** SwitchDim (EU only) <sup>2</sup> **DE** PoE <sup>3</sup>

0-10V, 1% dimming standard.

## F. OPTIONAL LOW VOLTAGE

**EV** Low Voltage

To be used with DE only.

<sup>&</sup>lt;sup>1</sup> available with 24" (610mm) diameters only.

<sup>&</sup>lt;sup>2</sup> DS & SD options not available in North America.

<sup>&</sup>lt;sup>3</sup> DE must be used with EV only.

## **TECHNICAL DATA**

#### **LUMINAIRE**

Code	973320	973330	973340
Square (A)	24"	36"	48"
Power	36W	90W	168W
Delivered Ims	4991	13279	25532
LPW	141	147	152

## **FINISH**


















White

Black Metallic Textured

Silver Metallic Textured

Midnight Blue Metallic -Textured

Gold Metallic -Textured

Copper Metallic

Charcoal Metallic -Textured

Bronze Metallic -Textured





Champagne Metallic

Red Metallic -Textured

## **APPROVALS**











## **DIMENSIONAL DIAGRAMS**

