




TIMPANI SQ™

FULL SPECIFICATION SHEET

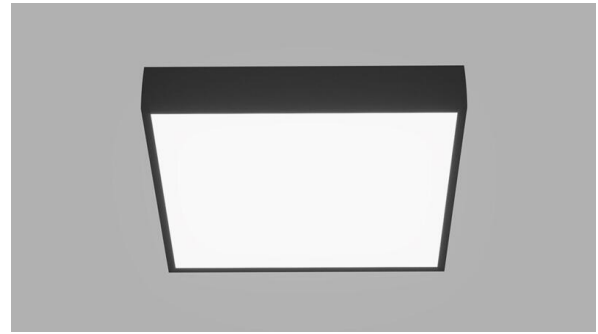

FIXTURE TYPE



FIXTURE CODE




QUANTITIES

1 DESCRIPTION

TIMPANI SQ communicates strength, reliability, and efficiency. This classic architectural square is a powerful ambient light, delivering up to 25,500 lumens, with various lumen packages available to provide the ideal light level for your space. **TIMPANI SQ** can now integrate into your data network via Power over Ethernet (PoE) connectivity. With 10 finish options, multiple sizes, and a range of lumen packages, **TIMPANI SQ** can be tailored to achieve the perfect illumination for any environment.

2 OPTICS & FEATURES

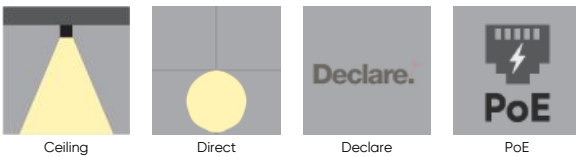

3 APPROVALS



4 GENERAL SPECIFICATION

BODY AND TRIM
Aluminum.

FINISH
Powder coated.

LENS

Opal polycarbonate

REPORTED L70 @25°C(77°F)

> 50,000 hrs.

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

DRIVERS

Integral, HPF electronic drivers for 120-277V (EU-240V). The driver is integral to the fixture housing.

POE

Timpani SQ can integrate into your data network via Power over Ethernet (PoE) connectivity.

MECHANICAL

Luminaires mount directly over J box (by others - North America only).

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.

SENSORS

Consult factory regarding sensor compatibility.

APPROVALS


Damp Rated.

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

5 DESIGN OPTIONS

FINISH

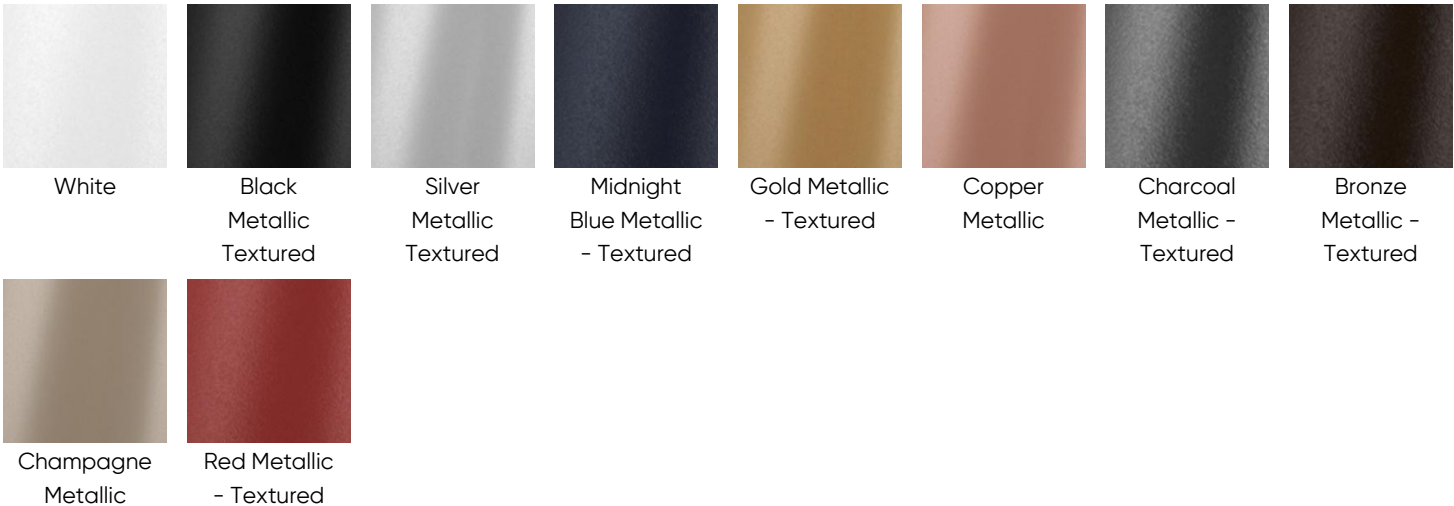

6 HOW TO ORDER

1. LUMINAIRE

973320 24", 4991 lms

973330 36", 13279 lms

973340 48", 25532 lms

2. CCT

30 3000K (min 80 CRI) **35** 3500K (min 80 CRI) **40** 4000K (min 80 CRI)

3. FINISH

WH White **BL** Black Metallic Textured **MS** Silver Metallic Textured **FA44** Midnight Blue Metallic - Textured
FA25 Gold Metallic - Textured **FA45** Copper Metallic **FA46** Charcoal Metallic - Textured **FA47** Bronze Metallic - Textured
FA52 Champagne Metallic **FA53** Red Metallic - Textured

4. LUMEN & WATTAGE REDUCTION

PRO Lumen & Wattage Reduction to approximately 25% of standard output **PR1** Lumen & Wattage Reduction to approximately 50% of standard output **PR2** Lumen Wattage & Reduction to approximately 75% of standard output

Note: Custom Reduction Percentages Available Upon Request.

5. DIMMING OPTIONS

D1 0-10V Dimming 1% **D2** 0-10V Dimming 0.1% ¹ **DL** DALI Dimming 1% **DS** DSI (EU only) ²
SD SwitchDim (EU only) ² **DE** PoE ³

0-10V, 1% dimming standard.

¹ Available with 24" (610mm) diameters only. ² DS & SD options not available in North America. ³ DE must be used with EV only.

6. OPTIONAL LOW VOLTAGE

EV Low Voltage

To be used with DE only.

7 TECHNICAL DATA

LUMINAIRE

Code	973320	973330	973340
Square (A)	24"	36"	48"
Power	36W	90W	168W
Delivered lms	4991	13279	25532
LPW	141	147	152

8 DIMENSIONAL DIAGRAMS

