






TIMPANI SQ™


FULL SPECIFICATION SHEET

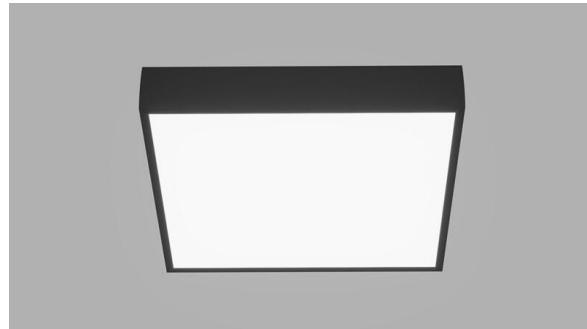

Fixture Type



Fixture Code




Quantities

1 DESCRIPTION

TIMPANI SQ communicates strength, reliability, and efficiency. This classic architectural square is a powerful ambient light, delivering up to 25,500 lumens, with various lumen packages available to provide the ideal light level for your space. **TIMPANI SQ** can now integrate into your data network via Power over Ethernet (PoE) connectivity. With 10 finish options, multiple sizes, and a range of lumen packages, **TIMPANI SQ** can be tailored to achieve the perfect illumination for any environment.

2 OPTICS & FEATURES

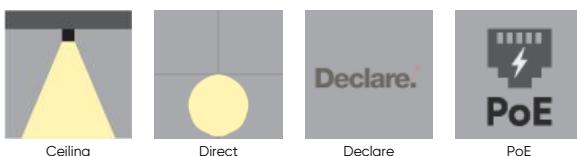

3 APPROVALS



4 GENERAL SPECIFICATION

BODY AND TRIM

Aluminum.

FINISH

Powder coated.

LENS

Opal polycarbonate

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

POE

Timpani SQ can integrate into your data network via Power over Ethernet (PoE) connectivity.

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.

APPROVALS

Damp Rated.

REPORTED L70 @25°C(77°F)

> 50,000 hrs.

DRIVERS


Integral, HPF electronic drivers for 120-277V (EU-240V). The driver is integral to the fixture housing.

MECHANICAL

Luminaires mount directly over J box (by others - North America only).

SENSORS

Consult factory regarding sensor compatibility.

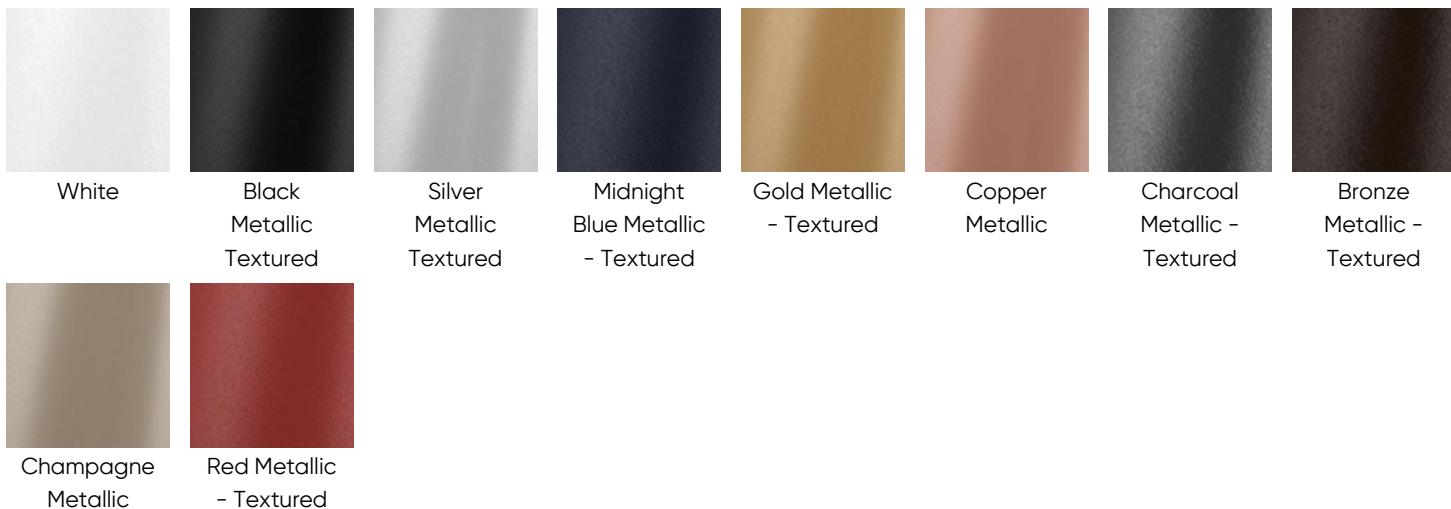5 DESIGN OPTIONS**FINISH****6 HOW TO ORDER****1. LUMINAIRE**

973320 24", 4991 lms

973330 36", 13279 lms

973340 48", 25532 lms

2. CCT

30 3000K (min 80 CRI) **35** 3500K (min 80 CRI) **40** 4000K (min 80 CRI)

3. FINISH

WH White	BL Black Metallic Textured	MS Silver Metallic Textured	FA44 Midnight Blue Metallic - Textured
FA25 Gold Metallic - Textured	FA45 Copper Metallic	FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured
FA52 Champagne Metallic		FA53 Red Metallic - Textured	

4. LUMEN & WATTAGE REDUCTION

PRO Lumen & Wattage Reduction to approximately 25% of standard output	PR1 Lumen & Wattage Reduction to approximately 50% of standard output	PR2 Lumen Wattage & Reduction to approximately 75% of standard output
--	--	--

Note: Custom Reduction Percentages Available Upon Request.

5. DIMMING OPTIONS

D1 0-10V Dimming 1%	D2 0-10V Dimming 0.1% ¹	DL DALI Dimming 1%	DS DSI (EU only) ²
SD SwitchDim (EU only) ²	DE PoE ³		

0-10V, 1% dimming standard.

¹ Available with 24" (610mm) diameters only. ² DS & SD options not available in North America. ³ DE must be used with EV only.

6. OPTIONAL LOW VOLTAGE

EV Low Voltage

To be used with DE only.

7 TECHNICAL DATA

LUMINAIRE

Code	973320	973330	973340
Square (A)	24"	36"	48"
Power	36W	90W	168W
Delivered lms	4991	13279	25532
LPW	141	147	152

8 DIMENSIONAL DIAGRAMS

