

TIMPANI SQ™ - CEILING

Project Name:



Fixture Type:

Fixture Code:

Quantities:



TIMPANI SQ™ - CEILING

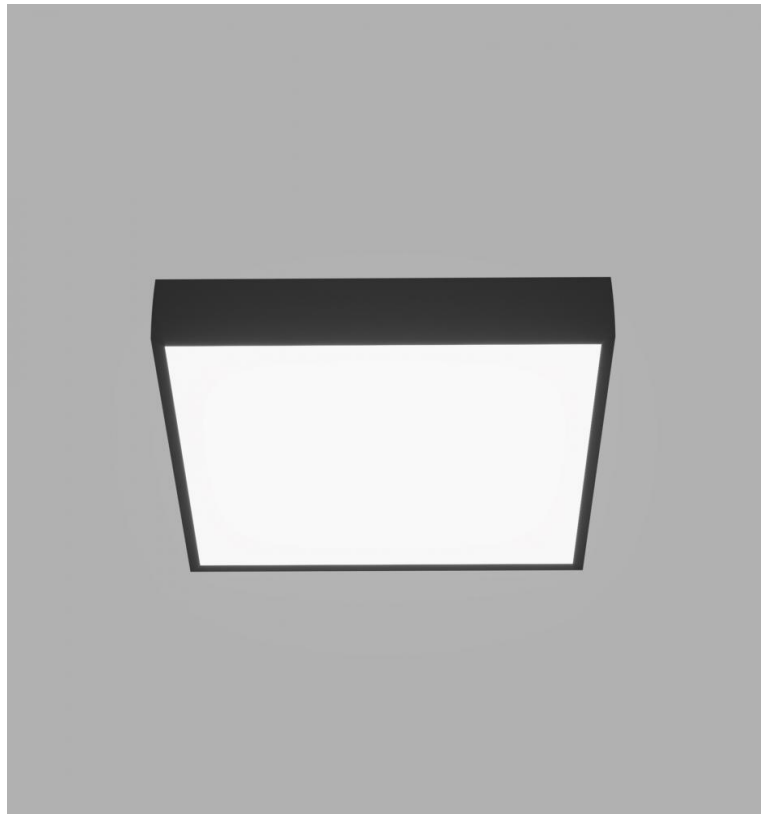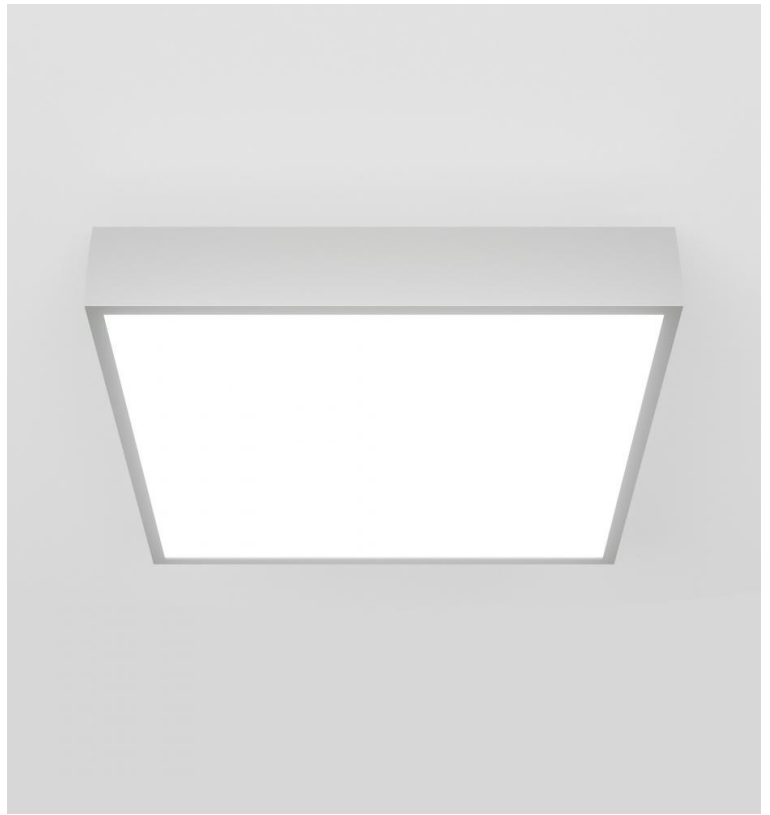

TIMPANI SQ™ - CEILING

TIMPANI SQ communicates strength, reliability, and efficiency. This classic architectural square is a powerful ambient light, delivering up to 25,500 lumens, with various lumen packages available to provide the ideal light level for your space. Now PoE compatible.

GENERAL SPECIFICATION

Body and trim

Aluminum.

Diffusers

Opal polycarbonate

Integral Emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

PoE

Timpani SQ can integrate into your data network via Power over Ethernet (PoE) connectivity.

Delivered Lumens

Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.

Approvals

Damp Rated.

Finish

Powder coated.

Reported L70 @25°C (77°F)

> 50,000 hrs.

Drivers

Integral, HPF electronic drivers for 120-277V (EU-240V). The driver is integral to the fixture housing.

Mechanical

Luminaires mount directly over J box (by others - North America only).


Sensors

Consult factory regarding sensor compatibility.

MOUNTING & OPTICS



Ceiling



Direct



Declare



PoE

TIMPANI SQ™ - CEILING

HOW TO ORDER

A. LUMINAIRE

973320 24", 4991 lms

973330 36", 13279 lms

973340 48", 25532 lms

B. CCT

30 3000K (min 80 CRI)

35 3500K (min 80 CRI)

40 4000K (min 80 CRI)

C. FINISH

WH White

BL Black Metallic Textured

MS Silver Metallic Textured

FA44 Midnight Blue Metallic - Textured

FA25 Gold Metallic - Textured

FA45 Copper Metallic

FA46 Charcoal Metallic - Textured

FA47 Bronze Metallic - Textured

FA52 Champagne Metallic

FA53 Red Metallic - Textured

D. LUMEN & WATTAGE REDUCTION

PRO Lumen & Wattage Reduction to approximately 25% of standard output

PR1 Lumen & Wattage Reduction to approximately 50% of standard output

PR2 Lumen Wattage & Reduction to approximately 75% of standard output

Note: Custom Reduction Percentages Available Upon Request.

E. DIMMING OPTIONS

D1 0-10V Dimming (1%)

D2 0-10V Dimming 0.1%¹

DL DALI Dimming (1%)

DS DSI (EU only)²

SD SwitchDim (EU only)²

DE PoE³

0-10V, 1% dimming standard.

¹ available with 24" (610mm) diameters only.

² DS & SD options not available in North America.

³ DE must be used with EV only.

F. OPTIONAL LOW VOLTAGE

EV Low Voltage

To be used with DE only.




TIMPANI SQ™ - CEILING

TECHNICAL DATA

LUMINAIRE

Code	973320	973330	973340
Square (A)	24"	36"	48"
Power	36W	90W	168W
Delivered lms	4991	13279	25532
LPW	141	147	152

FINISH

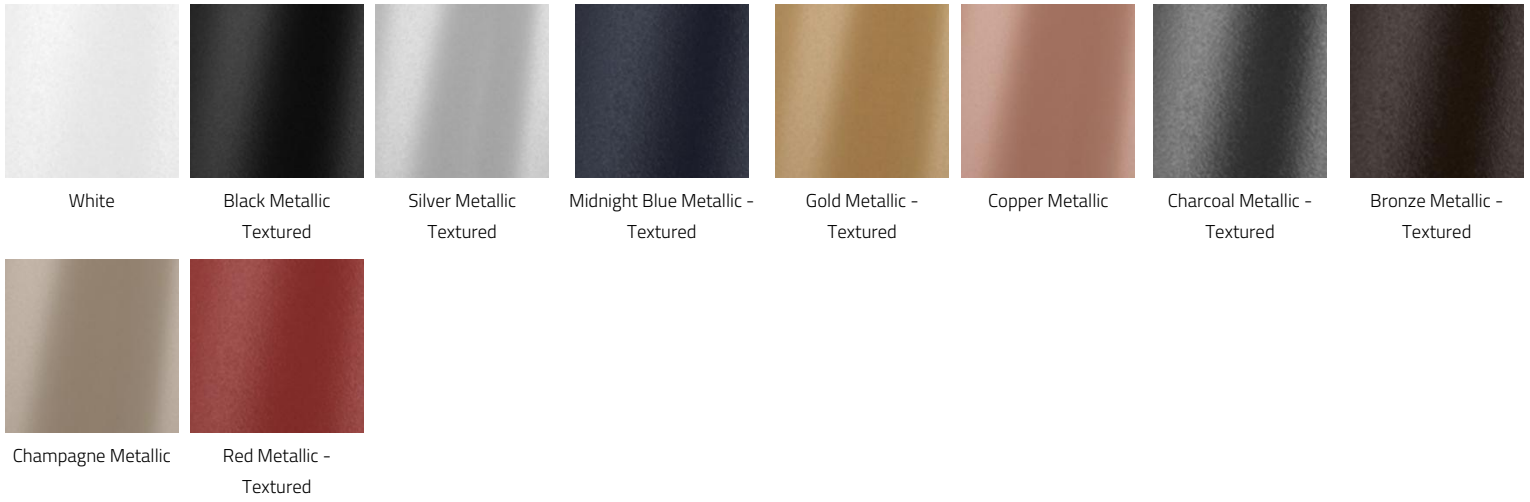

APPROVALS



TIMPANI SQ™ - CEILING

DIMENSIONAL DIAGRAMS

