



# TOWER™

## FULL SPECIFICATION SHEET



FIXTURE TYPE



FIXTURE CODE




QUANTITIES

### 1 DESCRIPTION

**TOWER** is a facade light designed with a robust aesthetic and engineered with exceptional power in both light output and optical control. 6 beam options are available ranging from 10° to 71°, for either direct or indirect light emission as well as multiple lumen output levels to choose from. An internal reflector ensures efficient light distribution allowing **TOWER** to be mounted at higher elevations for wayfinding or to accent facade features. The **TOWER** comes in 2 distinct finishes, Light Gray and Anthracite Gray.

### 2 OPTICS & FEATURES

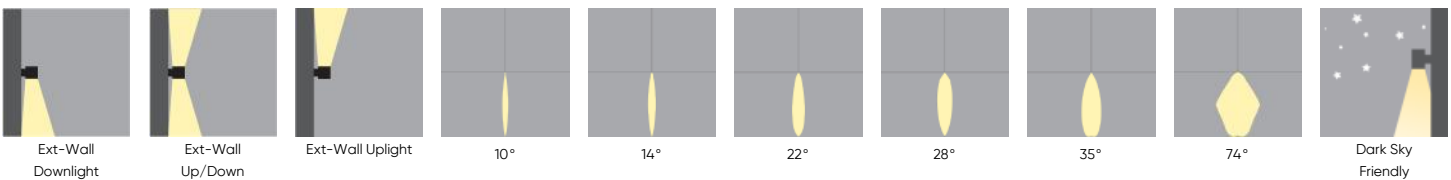

### 3 APPROVALS



### 4 GENERAL SPECIFICATION

#### BODY AND TRIM

Low copper die-cast aluminum, highly resistant to oxidation.

#### LENS

3mm/0.12" tempered glass/convex lens.

**GASKET**

Silicone.

**EXTERNAL SCREWS**

A4 stainless steel treated with highly antioxidant water-repellent lubricating solution to ensure easy opening.

**DRIVERS**

HPF, electronic 120/277V (EU-240V), 0-10V dimming.

**DELIVERED LUMENS**

Delivered lumens & LPW based on 3000K (min 90 CRI).

**IMPACT PROTECTION RATING**

IK 08

**FINISH**

Powder coated.

**CABLE ENTRY**

M16 double gland for DIA 5-10mm/0.2-0.4" cables.

**MECHANICAL**

Mounts directly over a Jbox (Mini Tower mounts over a 2"x4" Jbox).

**DARK SKY FRIENDLY**

Dark Sky Friendly if ordered with 3000K CCT and direct only.

**SUSTAINABILITY**

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

**5 DESIGN OPTIONS**

**FINISH**



Light Gray

Anthracite Gray

Matte Black

**6 HOW TO ORDER**

**1. LUMINAIRE**

<b>8308200</b> Mini Tower - 1447 lms, 14° Down	<b>8308202</b> Mini Tower - 1415 lms, 22° Down	<b>8308204</b> Mini Tower - 1414 lms, 35° Down	<b>8308280</b> Mini Tower - 2 x 1512 lms, 14° Up/Down
<b>8308282</b> Mini Tower - 2 x 1519 lms, 22° Up/Down	<b>8308284</b> Mini Tower - 2 x 1539 lms, 35° Up/Down	<b>8308250</b> Tower - 2325 lms, 15° Down	<b>8308251</b> Tower - 2316 lms, 37° Down
<b>8308252</b> Tower - 2352 lms, 74° Down	<b>8308260</b> Tower - 3346 lms, 15° Down	<b>8308261</b> Tower - 3334 lms, 37° Down	<b>8308262</b> Tower - 3386 lms, 74° Down
<b>8308270</b> Tower - 2 x 2451 lms, 15° Up/Down	<b>8308271</b> Tower - 2 x 2557 lms, 37° Up/Down	<b>8308272</b> Tower - 2 x 2609 lms, 74° Up/Down	

**2. CCT**

**30** 3000K (min 90 CRI)                      **40** 4000K (min 90 CRI)

**3. FINISH**

**GR** Light Gray                      **AG** Anthracite Gray                      **BL** Matte Black

**4. OPTIONS**

**DB** Dimming (0-10V, 10%) <sup>1</sup>

<sup>1</sup> Dimming is equal to or less than 10%.

**7 TECHNICAL DATA**

**LUMINAIRE**

<b>Code</b>	<b>8308200</b>	<b>8308202</b>	<b>8308204</b>	<b>8308280</b>	<b>8308282</b>	<b>8308284</b>
<b>Power (LED)</b>	16W	16W	16W	33W	33W	33W
<b>Delivered lms</b>	1447	1415	1414	2 x 1512	2 x 1519	2 x 1539
<b>Beam</b>	14° Down	22° Down	35° Down	14° Up/Down	22° Up/Down	35° Up/Down
<b>Style</b>	Mini Tower	Mini Tower	Mini Tower	Mini Tower	Mini Tower	Mini Tower
<b>Code</b>	<b>8308250</b>	<b>8308251</b>	<b>8308252</b>	<b>8308260</b>	<b>8308261</b>	<b>8308262</b>
<b>Power (LED)</b>	26W	26W	26W	39W	39W	39W
<b>Delivered lms</b>	2325	2316	2352	3346	3334	3386
<b>Beam</b>	15° Down	37° Down	74° Down	15° Down	37° Down	74° Down
<b>Style</b>	Tower	Tower	Tower	Tower	Tower	Tower
<b>Code</b>	<b>8308270</b>	<b>8308271</b>	<b>8308272</b>			
<b>Power (LED)</b>	54W	54W	54W			
<b>Delivered lms</b>	2 x 2451	2 x 2557	2 x 2609			
<b>Beam</b>	15° Up/Down	37° Up/Down	74° Up/Down			
<b>Style</b>	Tower	Tower	Tower			

**8** DIMENSIONAL DIAGRAMS

