

TOWER™ - WALL

Project Name:


Fixture Type:

Fixture Code:

Quantities:



TOWER™ - WALL

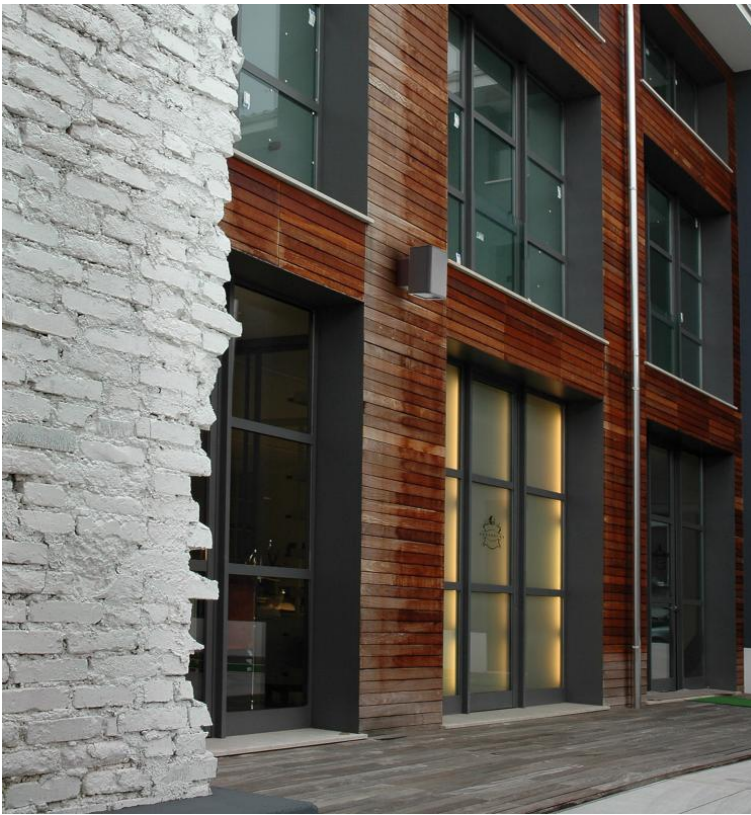

TOWER™ - WALL

TOWER is a facade light designed with a robust aesthetic and engineered with exceptional power in both light output and optical control. 6 beam options are available ranging from 10° to 71°, for either direct or indirect light emission. An internal reflector ensures efficient light distribution allowing TOWER to be mounted at higher elevations for wayfinding or to accent facade features.

GENERAL SPECIFICATION

Body and trim

Low copper die-cast aluminum, highly resistant to oxidation.

Gasket

Silicone.

External screws

A4 stainless steel treated with highly antioxidant water-repellent lubricating solution to ensure easy opening.

Drivers

HPF, electronic 120/277V (EU-240V), 0-10V dimming.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

Diffuser

3mm/0.12" tempered glass/convex lens.

Finish

Powder coated.

Cable entry

M16 double gland for DIA 5-10mm/0.2-0.4" cables.


Mechanical

Mounts directly over a Jbox (Mini Tower mounts over a 2"x4" Jbox).

Dark Sky Friendly

Dark Sky Friendly if ordered with 3000K CCT and direct only.

MOUNTING & OPTICS

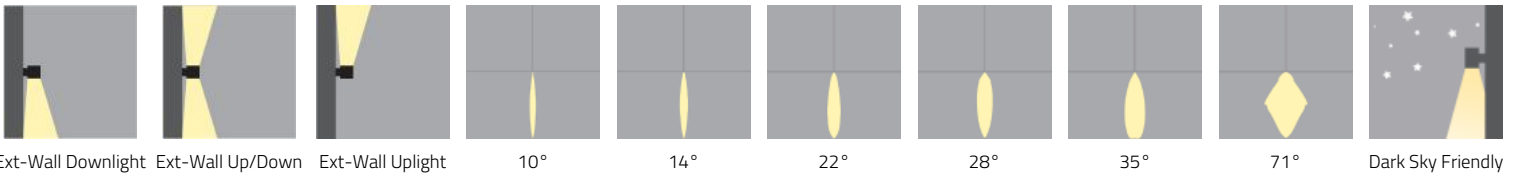

TOWER™ - WALL

HOW TO ORDER

A. LUMINAIRE

8308200 1669 lms, 14° Down	8308202 1632 lms, 22° Down	8308204 1544 lms, 35° Down	8308280 2 x 1595 lms, 14° Up/Down
8308282 2 x 1592 lms, 22° Up/Down	8308284 2 x 1522 lms, 35° Up/Down	8308250 2826 lms, 10° Down	8308251 2473 lms, 28° Down
8308252 2439 lms, 71° Down	8308260 4062 lms, 10° Down	8308261 3554 lms, 28° Down	8308262 3505 lms, 71° Down
8308270 2 x 2667 lms, 10° Up/Down	8308271 2 x 2474 lms, 28° Up/Down	8308272 2 x 2429 lms, 71° Up/Down	

B. CCT

30 3000K (min 80 CRI)	40 4000K (min 80 CRI)
------------------------------	------------------------------

C. FINISH

GR Light Gray	AG Anthracite Gray
----------------------	---------------------------

D. OPTIONS

DB Dimming (0-10V, 10%) ¹

¹ Dimming is equal to or less than 10%.

TECHNICAL DATA

LUMINAIRE


Code	8308200	8308202	8308204	8308280	8308282	8308284
Power (LED)	16W	16W	16W	30W	30W	30W
Delivered lms	1669	1632	1544	2 x 1595	2 x 1592	2 x 1522
Beam	14° Down	22° Down	35° Down	14° Up/Down	22° Up/Down	35° Up/Down
Style	Mini Tower	Mini Tower	Mini Tower	Mini Tower	Mini Tower	Mini Tower
Code	8308250	8308251	8308252	8308260	8308261	8308262
Power (LED)	26W	26W	26W	39W	39W	39W
Delivered lms	2826	2473	2439	4062	3554	3505
Beam	10° Down	28° Down	71° Down	10° Down	28° Down	71° Down
Style	Tower	Tower	Tower	Tower	Tower	Tower
Code	8308270	8308271	8308272			
Power (LED)	52W	52W	52W			
Delivered lms	2 x 2667	2 x 2474	2 x 2429			
Beam	10° Up/Down	28° Up/Down	71° Up/Down			
Style	Tower	Tower	Tower			

TOWER™ - WALL

FINISH



Light Gray



Anthracite Gray

APPROVALS





IP65



TOWER™ - WALL

DIMENSIONAL DIAGRAMS

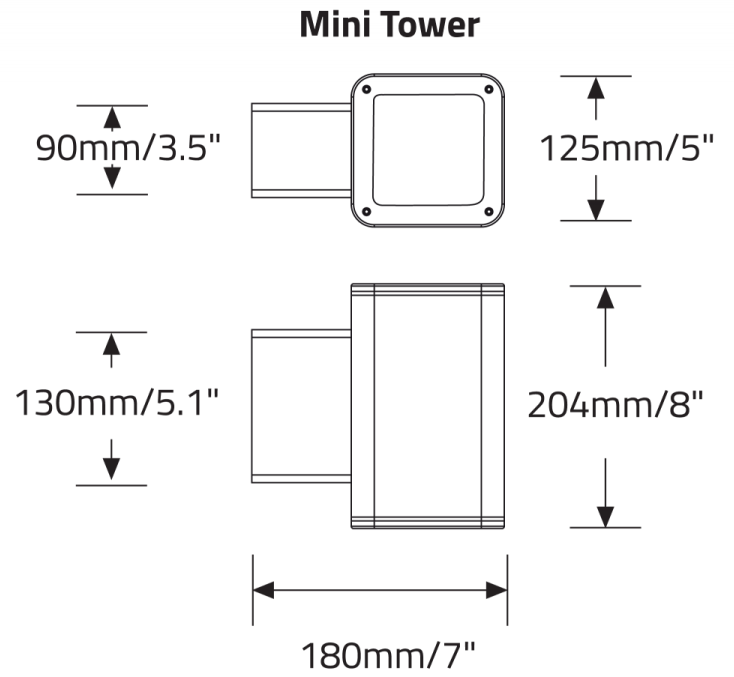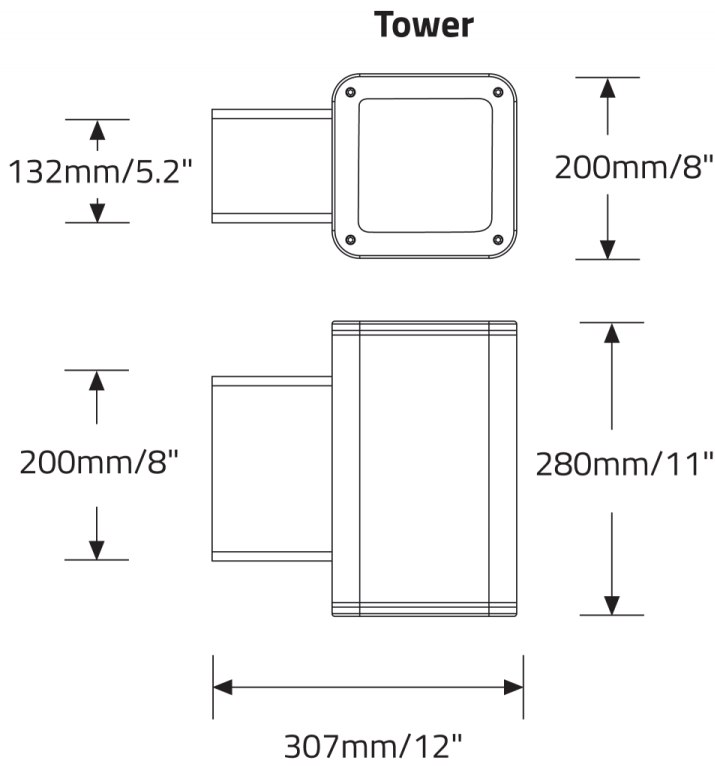

Note: Mini Tower mounts directly over a 2" x 4" J Box (by others).