TRAY™ - WALL SURFACE

Project Name:

Fixture Type:


Fixture Code:


Quantities:





© 2026 Beta-Calco Inc. Specifications are subject to change without notice

TRAY™ - WALL SURFACE

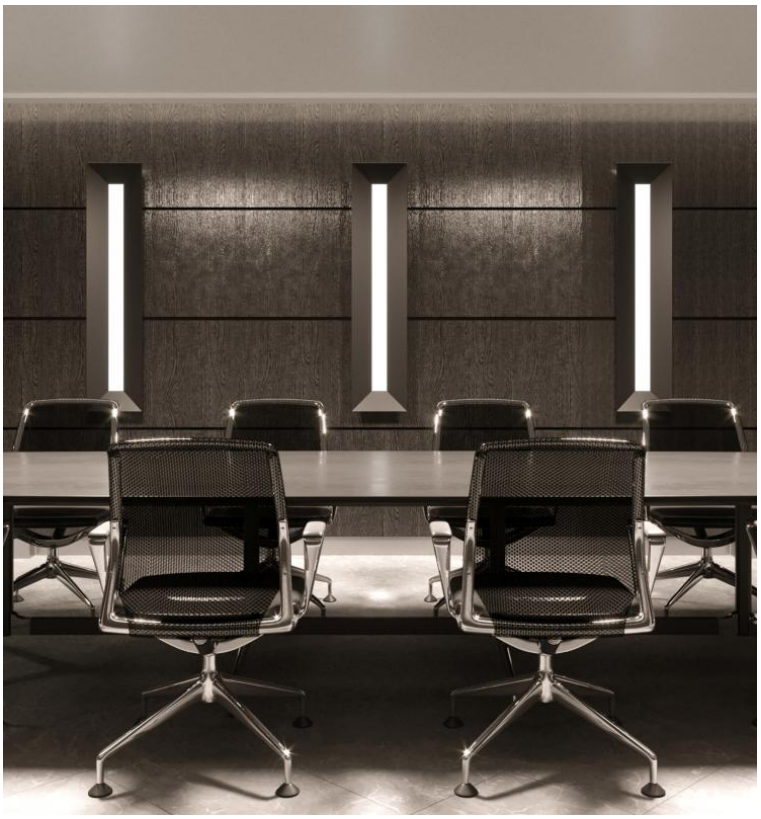

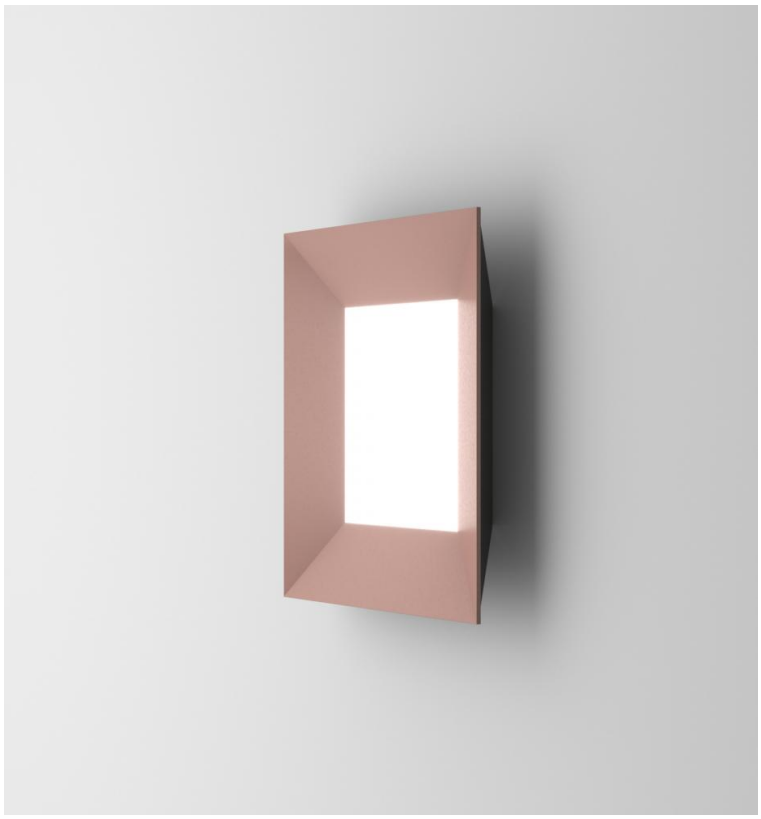

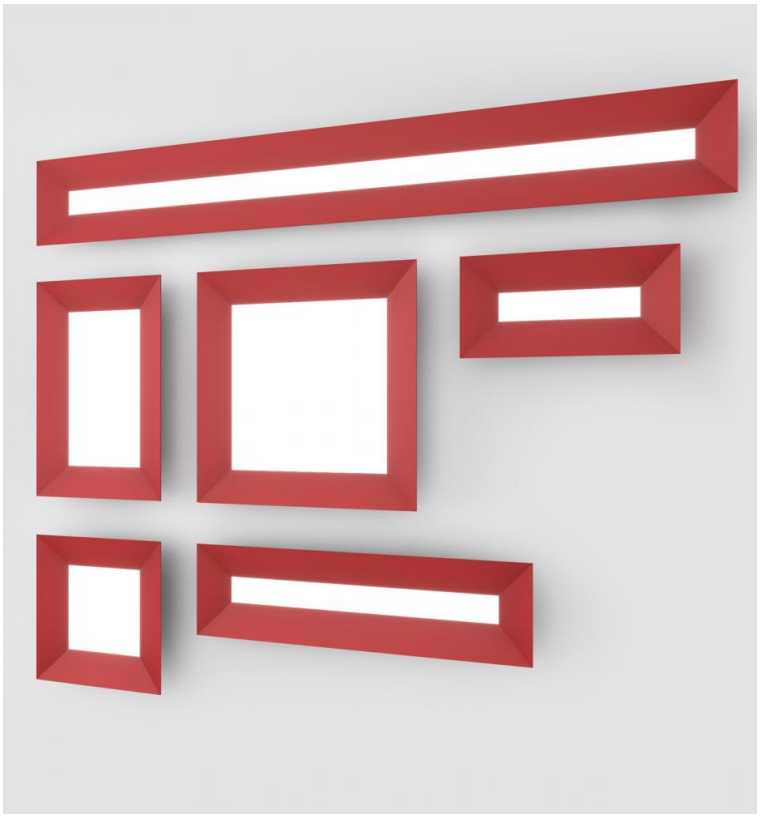

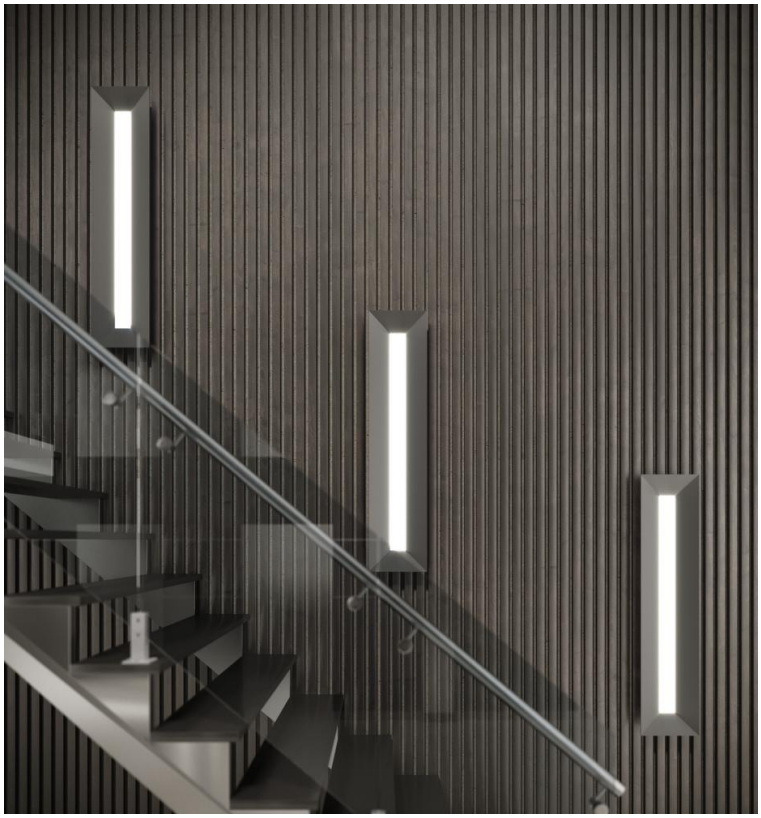

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

TRAY™ - WALL SURFACE

TRAY portrays a picture frame design. Our intention was to evoke the idea of empty picture frames, characterized by a similar concave design, for use in high-end architectural environments. TRAY is a fresh contemporary alternative to traditional lightbox style fixtures. With sloped back and side surfaces, TRAY creates depth when viewed from non-frontal angles. TRAY Wall features reduced lumen packages for optimized visual comfort.

GENERAL SPECIFICATION

Housing
Aluminum and steel.

Finish
Polyester powder coated.

Lens
Opal polycarbonate.

Drivers
HPF electronic, 120-277V (EU-240V).

Remote emergency
Provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad or NiMH batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

PoE
Tray can integrate into your data network via Power over Ethernet (PoE) connectivity.


Mechanical
Mounts directly to a standard electrical junction box (by others - North America only).

Delivered lumens
Delivered lumens & LPW based on 4000K (min 80 CRI).

Design
US Design Patent Pending.

Designed by
Serge Cornelissen.

OPTICS & FEATURES


Wall Direct


General Diffuse



PoE

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

TRAY™ - WALL SURFACE

HOW TO ORDER

A. LUMINAIRE

AG1 12" x 25", 677 lms
AG2 12" x 45", 1722 lms
AG3 12" x 94", 4249 lms
AG4 20" x 30", 3838 lms
AG5 20" SQ, 1907 lms
AG6 30" SQ, 7629 lms

B. CCT

J2 3000K (min 80 CRI)
J3 3500K (min 80 CRI)
J4 4000K (min 80 CRI)

C. DIMMING

D1 0-10V Dimming (1.0%)
D2 0-10V Dimming (0.1%)
D3 347V, 0-10V Dimming (1.0%)
D4 DALI Dimming (0.1%)
D5 DALI Dimming (1.0%)
D6 DSI (EU only)
D7 switchDim (EU only)
DA45 PoE

D6 & D7 dimming not available in North America.
DA45 must be used with EV only.

D. FINISH - FRONT FRAME

G1 White
G02 Black Metallic - Textured
G20 Silver Metallic - Textured
G25 Gold Metallic - Textured
G44 Midnight Blue Metallic - Textured
G45 Copper Metallic
G46 Charcoal Metallic - Textured
G47 Bronze Metallic - Textured
G52 Champagne Metallic
G53 Red Metallic - Textured

E. FINISH - BACK FRAME

H1 White
H02 Black Metallic - Textured
H20 Silver Metallic - Textured
H25 Gold Metallic - Textured
H44 Midnight Blue Metallic - Textured
H45 Copper Metallic
H46 Charcoal Metallic - Textured
H47 Bronze Metallic - Textured
H52 Champagne Metallic
H53 Red Metallic - Textured

F. LUMEN OUTPUT

L0 100% of standard output
L1 Lumen & wattage reduction to approximately 75% of standard output
L2 Lumen & wattage reduction to approximately 50% of standard output

AG1 not available with L1 or L2

G. EMERGENCY

E0 Emergency system not required
E2 Emergency system - Remote

H. OPTIONAL LOW VOLTAGE

EV Low Voltage

To be used with DA45 only.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

TRAY™ - WALL SURFACE

TECHNICAL DATA

LUMINAIRE

Code	AG1	AG2	AG3	AG4	AG5	AG6
Size	12" x 25"	12" x 45"	12" x 94"	20" x 30"	20" SQ	30" SQ
Wattage	6W	14W	34W	27W	14W	55W
Delivered lms	677	1722	4249	3838	1907	7629
LPW	121	122	126	140	139	139


FINISH - FRONT

White



Black Metallic - Textured


Silver Metallic - Textured


Gold Metallic - Textured


Midnight Blue Metallic - Textured


Copper Metallic


Charcoal Metallic - Textured


Bronze Metallic - Textured


Champagne Metallic


Red Metallic - Textured


FINISH - BACK

White



Black Metallic - Textured


Silver Metallic - Textured


Gold Metallic - Textured


Midnight Blue Metallic - Textured


Copper Metallic


Charcoal Metallic - Textured


Bronze Metallic - Textured


Champagne Metallic


Red Metallic - Textured

APPROVALS

DAMP LOCATION


IP20

© 2026 Beta-Calco Inc. Specifications are subject to change without notice


TRAY™ - WALL SURFACE

DIMENSIONAL DIAGRAMS


AG1

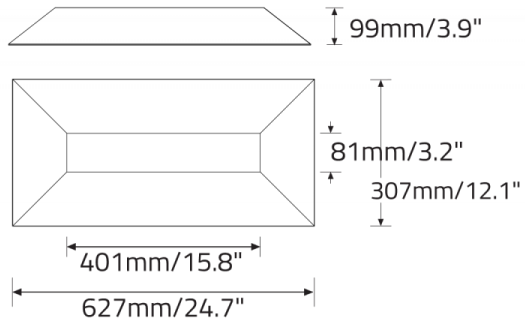


AG2

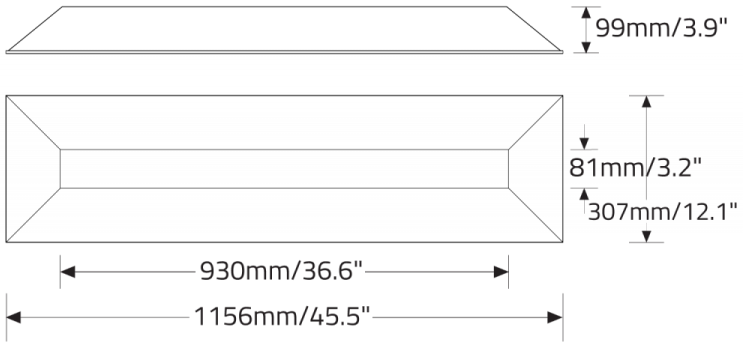


AG3

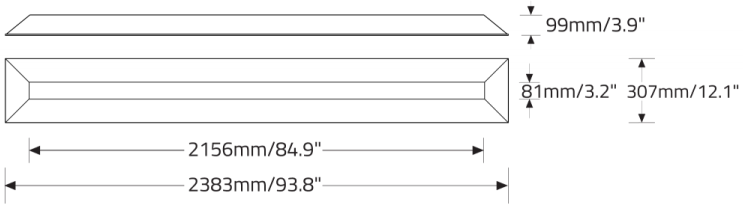


AG4

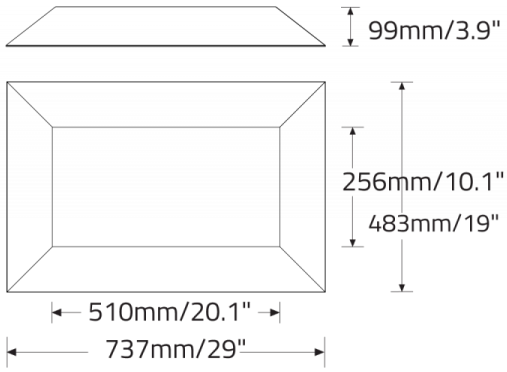

AG5

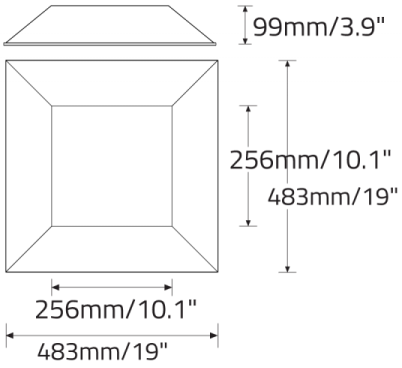

AG6

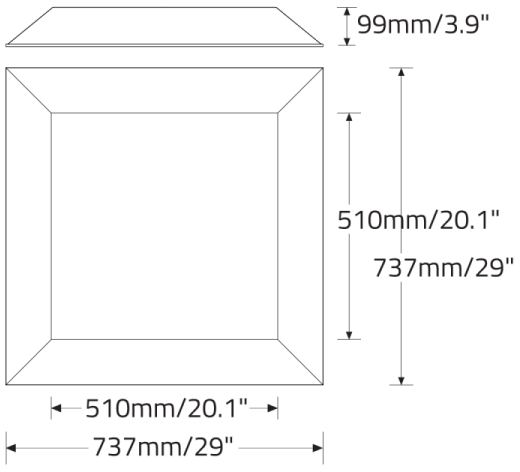

© 2026 Beta-Calco Inc. Specifications are subject to change without notice