TRILOGY CRADLE™

FULL SPECIFICATION SHEET



FIXTURE TYPE	FIXTURE CODE	QUANTITIES

1 DESCRIPTION

2 OPTICS & FEATURES



Ceiling
Direct/Indirect

3 APPROVALS

Intertek · CE · DAMP LOCATION · F · IP20

4 GENERAL SPECIFICATION

BODY AND TRIM

Steel and aluminum.

FINISH

Back plate, powder coated gloss white. Trim, painted or plated as listed.

LENS

Three ply satin opal glass.

DRIVERS

HPF electronic, 120/277V (EU-240V). 0-10V, 1% dimming standard.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

LUMINAIRE ORIENTATION

Ceiling or wall mounted.

DELIVERED LUMENS

Delivered lumens & LPW based on 3000K (min 80 CRI).

MECHANICAL

Mounts directly to a junction box (by others - North America only).

APPROVALS

Damp Location (Indoor use only).

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

5 HOW TO ORDER

LUMINAIRE

638818 63 8818

CCT

30 3000K (min 80 CRI)
35 3500K (min 80 CRI)
40 4000K (min 80 CRI)

FINISH

WH White
MB Metallic Bronze
MS Silver Metallic
PC Polished Chrome
SC Satin Chrome
SN Satin Nickel
OT Other painted finish (RAL number required)
F40 Other Non-RAL painted finish (sample chip required)

OT & BL1 have a one time set-up charge regardless of quantity.


6 TECHNICAL DATA

LUMINAIRE

Code	**638818**
Power (LED)	21W
Delivered lms	1240
LPW	59
Weight	6.3Kg/14lb

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

7 DIMENSIONAL DIAGRAMS

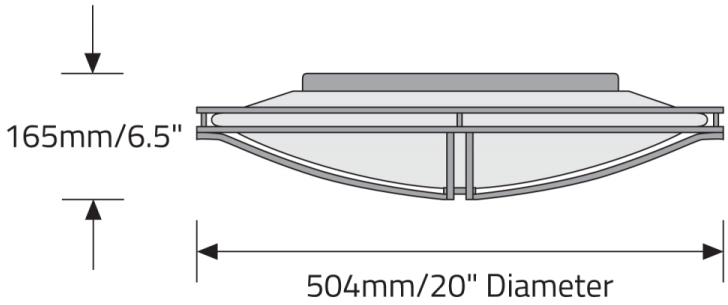

© 2026 Beta-Calco Inc. Specifications are subject to change without notice