


# TUNNEL™ - CEILING



Project Name:

Fixture Type:

Fixture Code:

Quantities:

## A. LUMINAIRE

**TLCC1C** Direct, 1300 lms/ft

All data shown at max values based on diffused light diffuser. Consult Performance Data download page for more detail.  
One power cord for every 50 linear feet.

## B. LENGTH OF RUN

SFA \_ \_ \_ \_

Length of run is 4, 6, 8, 10 or 12ft only, not available as a continuous run. For 6 inch increments, consult factory.

## C. LENGTH

**SL04** 4ft

**SL06** 6ft

**SL08** 8ft

**SL10** 10ft

**SL12** 12ft

Length of run is 4, 6, 8, 10 or 12 feet only, not available as a continuous run.

## D. LM/FT

**LPF020** 200 lm/ft

**LPF040** 400 lm/ft

**LPF060** 600 lm/ft

**LPF080** 800 lm/ft

**LPF100** 1000 lm/ft

**LPF120** 1200 lm/ft

**LPF140** 1400 lm/ft

## E. CRI

**CR80** CRI 80+

**CR90** CRI 90+

## F. CCT

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

## G. DIFFUSER

**DD1** Asymmetric diffuser <sup>1</sup>

**DD2** Batwing diffuser

**DD3** Diffused light diffuser <sup>1 2</sup>

**DD4** Comfort diffuser <sup>3</sup>

<sup>1</sup> When standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.

<sup>2</sup> High output diffuser, all data shown based on this diffuser.

<sup>3</sup> 10% reduction from DD3. The comfort lens provides better control and softer distribution.

## H. VOLTAGE

**V1** 120/277V

**V2** 240V <sup>1</sup>

**V3** 347V <sup>2</sup>

**V4** Low Voltage <sup>3</sup>

<sup>1</sup> Not available in North America.

<sup>2</sup> Only available with DA01 dimming.



# TUNNEL™ - CEILING

## I. DIMMING

**DA01** 0-10V Dimming 1.0%

**DA02** 0-10V Dimming 0.1%<sup>1</sup>

**DA20** DALI Dimming 0.1%<sup>1</sup>

**DA21** DALI Dimming 1.0%<sup>1</sup>

**DA30** DSI/switchDim<sup>2</sup>

**DA45** PoE<sup>3</sup>

<sup>1</sup> Not available with V3.

<sup>2</sup> Not available in North America.

<sup>3</sup> Only available with V4.

## J. FINISH

**FA01** White - Textured

**FA02** Black Metallic - Textured

**FA20** Silver Metallic - Textured

**FA25** Gold Metallic - Textured

**FA27** Wood grain - Light Cherry<sup>1</sup>

**FA28** Wood grain - Dark Walnut<sup>1</sup>

**FA44** Midnight Blue Metallic - Textured

**FA45** Copper Metallic

**FA46** Charcoal Metallic - Textured

**FA47** Bronze Metallic - Textured

**FA52** Champagne Metallic

**FA53** Red Metallic - Textured

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## K. EMERGENCY

**E0** Not required

**E1** Emergency system - Integral<sup>1</sup>


**E3** Emergency generated circuit<sup>1</sup>

<sup>1</sup> Not available with 347V.




# TUNNEL™ - CEILING

## DIMENSIONAL DIAGRAMS

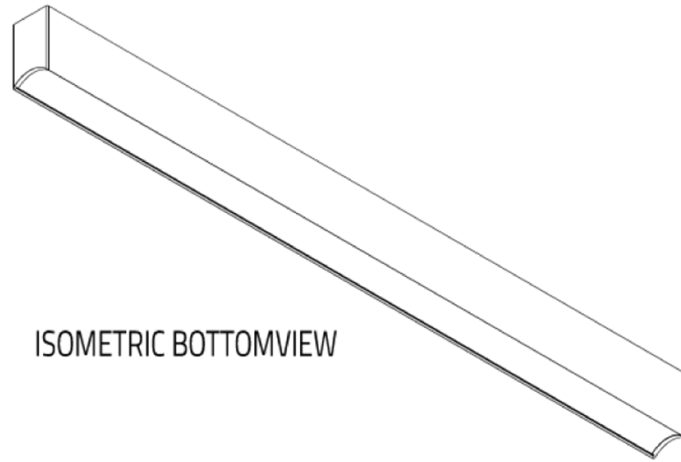

ISOMETRIC BOTTOMVIEW



Bottom View

Top View  
(Asymmetric Light Direction)

