




TUNNEL™

FULL SPECIFICATION SHEET

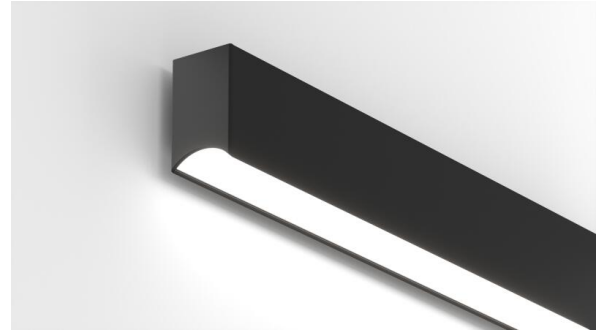

Fixture Type

Fixture Code

Quantities

1 DESCRIPTION

TUNNEL revives the classic functional form into a charming new style with an incurved enhancement. With this design flair comes great functionality. **TUNNEL** exceeds the typical levels of output and efficacy, and delivers on specification capabilities. Alternatives are provided for nearly every component, allowing designers to configure a luminaire designed precisely to the needs of the space. **TUNNEL's** luxurious finishes and smooth lines create a stylish luminaire that doesn't compromise on performance.


2 OPTICS & FEATURES




Wall -
Direct/Indirect




Direct DD1



Direct DD4




Indirect UD2



Indirect UD3



Bios



Declare



PoE

3 APPROVALS



4 GENERAL SPECIFICATION

BODY

Aluminum.

MECHANICAL

Luminaires mount directly over J box (by others).

POE

Can be integrated into your data network via Power over Ethernet (PoE) connectivity.

TUNABLE WHITE

Tunable White range from 2700K to 6500K is available; contact the factory for details.

DRIVERS

HPF electronic drivers for 120–277V, 347 (EU–240V). The driver is integral to the fixture housing.

SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.

REPORTED L70 @25°C (77°F)

> 60,000 hrs @ 2000 lumens/ft (6000 lumens/m)

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K CRI 80+

DESIGNED BY

Serge Cornelissen.

FINISH

Powder coated.

DIFFUSER

Opal acrylic. 2.4" width

BIOS

For circadian lighting, consult factory.

RGBW

RGBW available, consult factory.

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

FIXTURE LENGTHS

Available in 1" increments. Contact the factory for details.

ESTIMATED L70 @25°C (77°F)

> 165,000 hrs @ 2000 lumens/ft (6000 lumens/m)

APPROVALS

Damp Rated.

DESIGN

US Design Patent Pending.

5

DESIGN OPTIONS

FIXTURE FINISH

							
White - Textured	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Wood grain - Light Cherry ¹	Wood grain - Dark Walnut ¹	Midnight Blue Metallic - Textured	Copper Metallic
							
Charcoal Metallic - Textured	Bronze Metallic - Textured	Champagne Metallic	Red Metallic - Textured				

¹ Longer than normal lead times may apply, consult factory.

6

HOW TO ORDER

1. LUMINAIRE

TLCW1W Direct TLCW2W Direct/Indirect

One power cord every 50 linear ft.

2. LENGTH OF RUN

Minimum length to order is 4ft and orders to be in 2ft increments. For 6 inch increments, consult factory.

Example: 4ft = SFA0400

Example: 10ft = SFA1000

Example: 50ft = SFA5000

For runs over 50ft in length, consult factory.

SFA_ _ _ _

Minimum length to order is 4ft and orders to be in 2ft increments. For 6 inch increments, consult factory.

Example: 4ft = SFA0400

Example: 10ft = SFA1000

Example: 50ft = SFA5000

For runs over 50ft in length, consult factory.

3. MAX LENGTH PER SECTION

SL04 4ft

SL06 6ft

SL08 8ft

SL10 10ft

SL12 12ft

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact sales@betacalco.com.

4. LM/FT (DIRECT)

LPF020 200 lm/ft

LPF040 400 lm/ft

LPF060 600 lm/ft

LPF080 800 lm/ft

LPF100 1000 lm/ft

LPF120 1200 lm/ft

LPF140 1400 lm/ft

5. LM/FT (INDIRECT)

LPG000 Not required

LPG020 200 lm/ft

LPG040 400 lm/ft

LPG060 600 lm/ft

LPG080 800 lm/ft

LPG100 1000 lm/ft

LPG120 1200 lm/ft

LPG140 1400 lm/ft

LPG165 1650 lm/ft

6. CRI

CR80 CRI 80+

CR90 CRI 90+

7. CCT DIRECT

CTA27 2700K

CTA30 3000K

CTA35 3500K

CTA40 4000K

8. CCT INDIRECT

CTB00 Not required	CTB27 2700K	CTB30 3000K	CTB35 3500K
CTB40 4000K			

9. DIRECT DIFFUSER

DD1 Asymmetric diffuser	DD4 Comfort diffuser
--------------------------------	-----------------------------

10. UPLIGHT DIFFUSER

UD0 Not required	UD2 Opal diffuser	UD3 Asymmetric diffuser ¹
-------------------------	--------------------------	---

¹ Available up to 1200 lm/ft. The asymmetric distribution will be directed away from the wall.

11. UPLIGHT BLACKOUT PLATE

UB00 Not required	UB_ _ Blackout plate ¹
--------------------------	--

¹ Available on a per foot basis. May be required to prevent lighting up of duct work in loft style applications.

12. VOLTAGE

V1 120/277V	V2 240V ¹	V3 347V ²	V4 Low Voltage ³
--------------------	-----------------------------	-----------------------------	------------------------------------

¹ Not available in North America.

² Only available with DA01 dimming.

³ Only available with DA45 dimming.

13. DIMMING

DA01 0-10V Dimming 1.0%	DA02 0-10V Dimming 0.1% ¹	DA20 DALI Dimming 0.1% ¹	DA21 DALI Dimming 1.0% ¹
DA30 DSI/switchDim ²	DA45 PoE ³		

¹ Not available with V3.

² Not available in North America.

³ Only available with V4.

14. FIXTURE FINISH

FA01 White – Textured	FA02 Black Metallic – Textured	FA20 Silver Metallic – Textured	FA25 Gold Metallic – Textured
FA27 Wood grain – Light Cherry ¹	FA28 Wood grain – Dark Walnut ¹	FA44 Midnight Blue Metallic – Textured	FA45 Copper Metallic
FA46 Charcoal Metallic – Textured	FA47 Bronze Metallic – Textured	FA52 Champagne Metallic	FA53 Red Metallic – Textured

¹ Longer than normal lead times may apply, consult factory.

15. EMERGENCY

E0 Not required	E1 Emergency system – Integral ¹	E3 Emergency generated circuit ¹
------------------------	--	--

¹ A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. Not available in 347V.

16. CIRCUITS

CS1 Single circuit	CS2 Dual circuit ¹
---------------------------	--------------------------------------

17. SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.






7 TECHNICAL DATA

LUMINAIRE

One power cord every 50 linear ft.

Code	TLCW1W	TLCW2W
Light Direction		


8
PERFORMANCE DATA

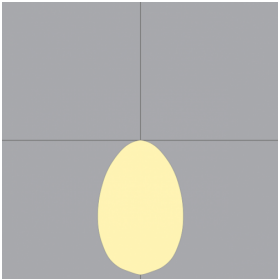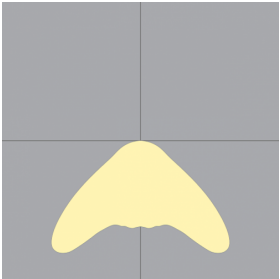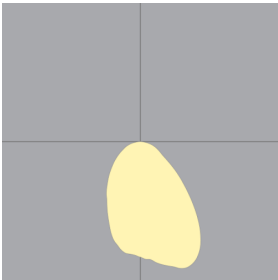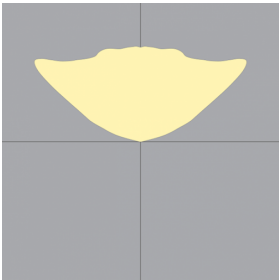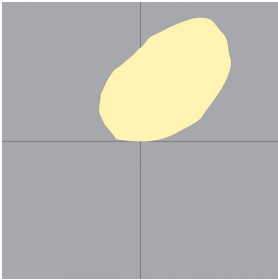DIRECT COMFORT (DD4)	LUMEN/FT	WATT/FT	LPW	DIRECT BATWING (DD2)	LUMEN/FT	WATT/FT	LPW
	1400	13	103		1400	13	108
	1200	11	106		1200	11	112
	1000	9	109		1000	9	115
	800	7	112		800	7	118
	600	5	115		600	5	121
	400	3	119		400	3	124
	200	2	120		200	2	129
DIRECT ASYMMETRIC (DD1)	LUMEN/FT	WATT/FT	LPW	INDIRECT BATWING (UD1)	LUMEN/FT	WATT/FT	LPW
	1400	13	112		1650	13	132
	1200	11	115		1400	10	137
	1000	9	118		1200	9	140
	800	7	121		1000	7	144
	600	5	125		800	6	146
	400	3	128		600	4	150
	200	2	133		400	3	153
					200	1	153
INDIRECT ASYMMETRIC (UD3)	LUMEN/FT	WATT/FT	LPW				
	1200	13	97				
	1000	10	100				
	800	9	102				
	600	6	107				
	400	4	109				
	200	2	112				

9


TM-30 DATA

CCT 2700K

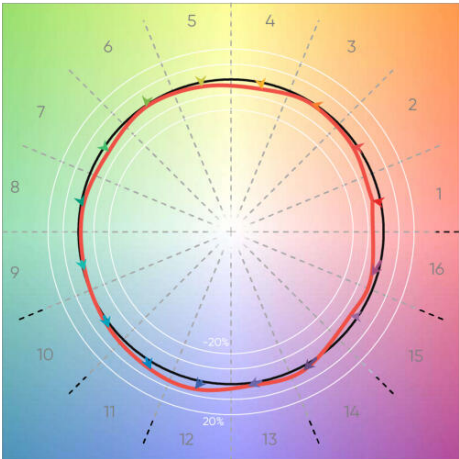


CRI(Ra)	93
CRI(R9)	61
TM30(Rf)	91
TM30(Rg)	98
Duv	-0.0022

CCT 3000K

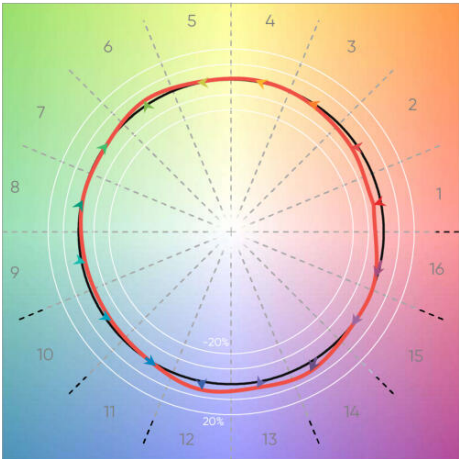


CRI(Ra)	92
CRI(R9)	58
TM30(Rf)	92
TM30(Rg)	100
Duv	-0.0003

CCT 3500K

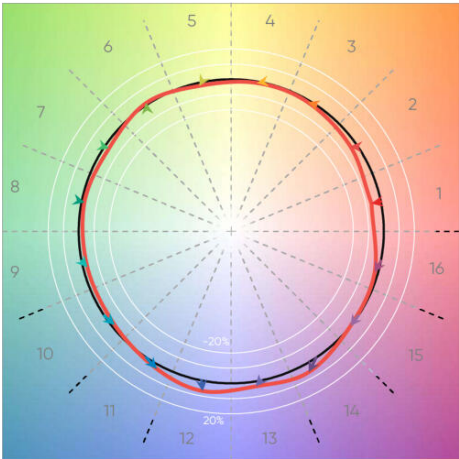



CRI(Ra)	91
CRI(R9)	53
TM30(Rf)	90
TM30(Rg)	99
Duv	-0.0007

CCT 4000K

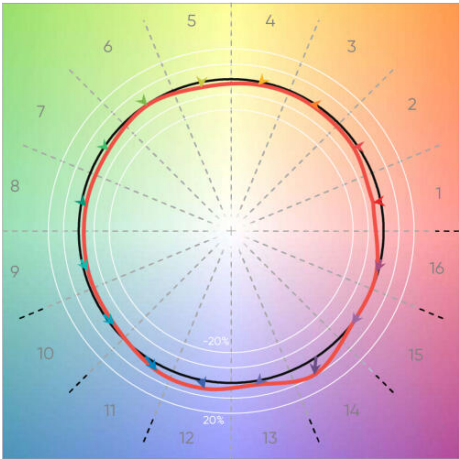

CRI(Ra)	93
CRI(R9)	64
TM30(Rf)	90
TM30(Rg)	98
Duv	0.0000

Isometric Views

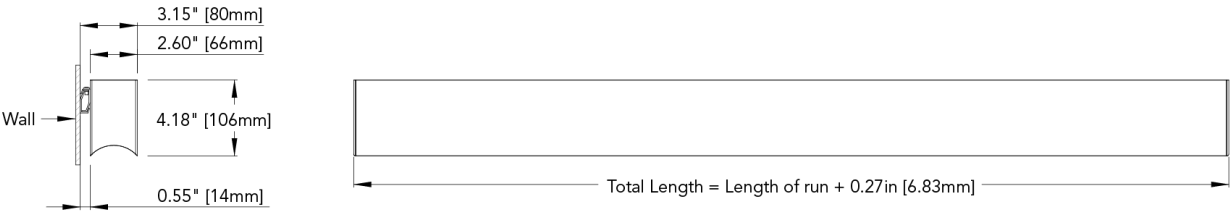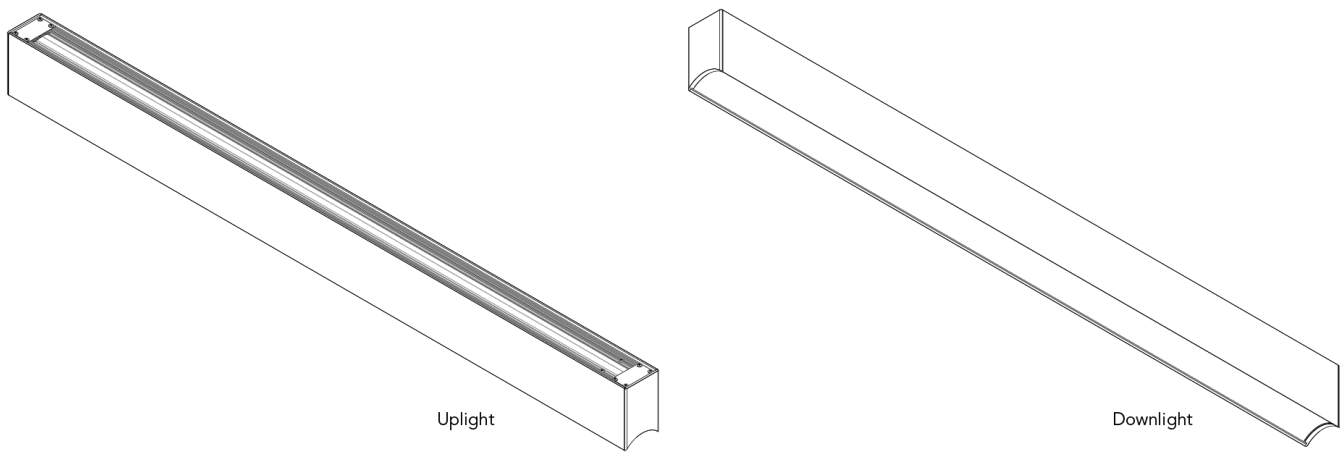


Top View [Uplight]




Bottom View [Downlight]

Wall Mount Configurations


4FT

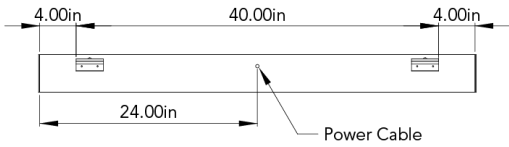


6FT

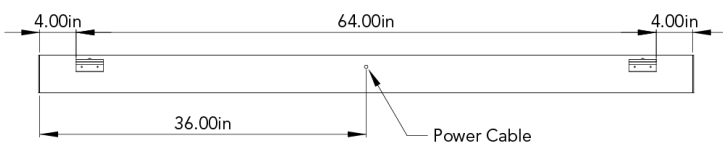

8FT

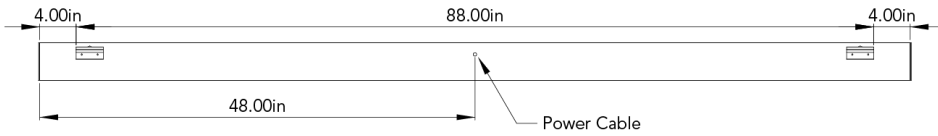

10FT

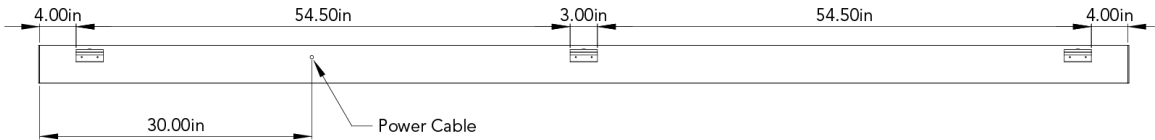

12FT

