

WARP™ - CEILING

Project Name:


Fixture Type:

Fixture Code:

Quantities:



WARP™ - CEILING

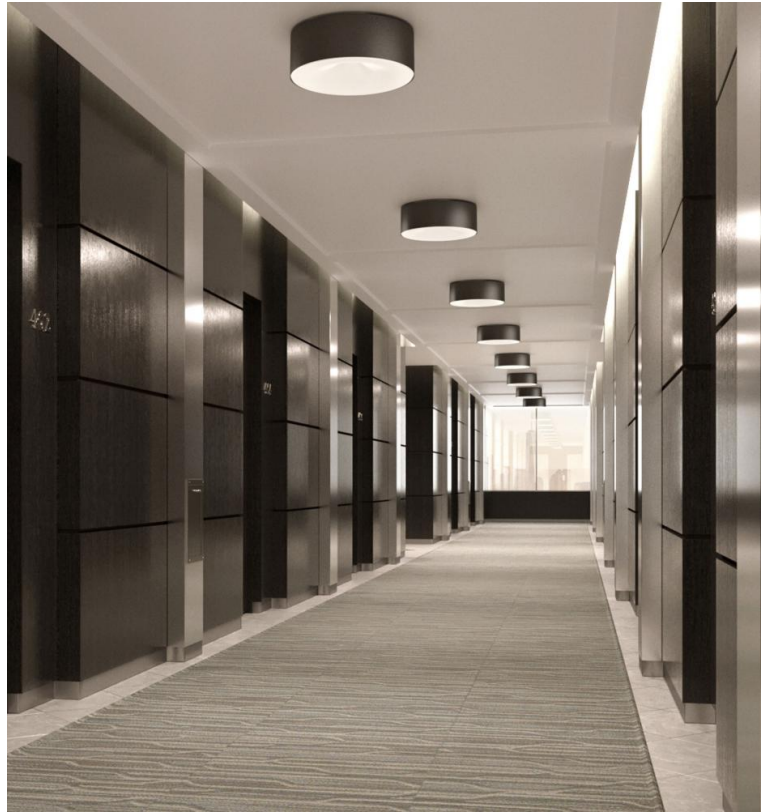

WARP™ - CEILING

Our dual circuit luminaire delivers high efficiency diffused, spot and direct light, allowing you to transition from general ambient to mood lighting. Available in two sizes 18" (457mm) & 24" (610mm), the **WARP** family offers two styles of pendant plus a ceiling mounted version. The color temperature of each light source can be individually selected to deliver an effect best suited to the application. New to the WARP are a wide array of contemporary decorative colors to accent your architectural scene.

GENERAL SPECIFICATION

Body

Aluminum and steel.

Drivers

HPF electronic drivers for 120-277V, 347V, (EU-240V). The driver is integral to the fixture housing.

Integral emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Integral emergency EU luminaires have a 10.5" (270mm) DIA x 2" (48mm) height canopy with LED charge indicator. Not available with a 347V supply.

Delivered lumens

Delivered lumens & LPW based on 4000K (min 80 CRI).

L70 @25°C

> 50,000 hrs.

Design

US Pat. No. D893,083.

Mechanical

Luminaires mount directly to a J box (by others - North America only).

Diffuser

Acrylic.

Remote emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

Sensors

Consult factory regarding sensor compatibility.

Approvals

Damp Rated.

Designed by

Serge Cornelissen.

MOUNTING & OPTICS



Ceiling Direct

Direct

Spot Only 40°

Declare



WARP™ - CEILING

HOW TO ORDER

A. LUMINAIRE

WARC1P18 18", 3300 lms

WARC1P24 24", 4900 lms

B. LUMENS

LMA0200 2000 lm

LMA0330 3300 lm

LMA0490 4900 lm

¹ Available for WARC1P24 only.

C. CRI

CR80 CRI 80+

D. CCT

CTA30 3000K

CTA35 3500K

CTA40 4000K

E. VOLTAGE

V1 120/277V

V2 240V ¹

V3 347V ²

¹ Not available in North America.

² Available with DA01 dimming only.

F. DIMMING

DA01 0-10V Dimming 1.0%

DA02 0-10V Dimming 0.1% ¹

DA20 DALI Dimming 0.1% ¹

DA21 DALI Dimming 1.0% ¹

DA30 DSI/switchDim ^{1 2}

¹ Not available with V3.

² Not available in North America.

G. FINISH

FA01 White

FA02 Black Metallic - Textured

FA20 Silver Metallic - Textured

FA25 Gold Metallic - Textured

FA44 Midnight Blue Metallic - Textured

FA45 Copper Metallic

FA46 Charcoal Metallic - Textured

FA47 Bronze Metallic - Textured

FA52 Champagne Metallic

FA53 Red Metallic - Textured

H. EMERGENCY

E0 Not required

E1 Emergency system - Integral

E2 Emergency system - Remote

I. DOWNLIGHT SPOT

DL00 Not required

DL27 Downlight 28W, 2700K (1730 delivered lms)

DL30 Downlight 28W, 3000K (1799 delivered lms)

DL35 Downlight 28W, 3500K (1854 delivered lms)

DL40 Downlight 28W, 4000K (1858 delivered lms)

Beam angle for Downlight Spot is 40°.

CIRCUITS

CS1 Single Circuit

CS2 Dual Circuit




WARP™ - CEILING

TECHNICAL DATA

LUMINAIRE

Code	WARC1P18	WARC1P24
Diameter (A)	18"	24"
Wattage	22W	34W
Delivered lms	3300	4900
LPW	146	145
Height (B)	6"	6.5"

FINISH

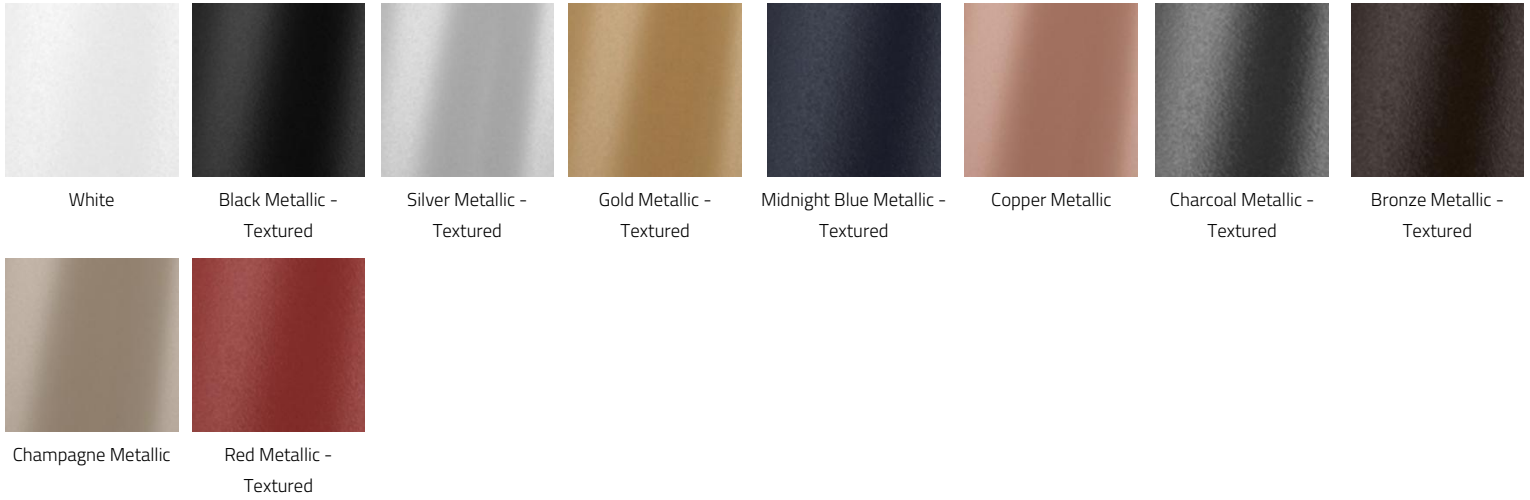

APPROVALS



WARP™ - CEILING

DIMENSIONAL DIAGRAMS

