





WARP™


FULL SPECIFICATION SHEET



Fixture Type



Fixture Code



Quantities

1 DESCRIPTION

Our dual circuit luminaire delivers high efficiency diffused, spot and direct light, allowing you to transition from general ambient to mood lighting. Available in two sizes 18" (457mm) & 24" (610mm), the **WARP** family offers two styles of pendant plus a ceiling mounted version. The color temperature of each light source can be individually selected to deliver an effect best suited to the application. New to the **WARP** are a wide array of contemporary decorative colors to accent your architectural scene.

2 OPTICS & FEATURES



Ceiling Direct

Direct

Spot Only 40°

Declare

3 APPROVALS



4 GENERAL SPECIFICATION

BODY

Aluminum and steel.

MECHANICAL

Luminaires mount directly to a J box (by others – North America only).

DRIVERS

HPF electronic drivers for 120-277V, 347V, (EU-240V). The driver is integral to the fixture housing.

LENS

Acrylic.

REMOTE EMERGENCY

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only). Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

SENSORS

Consult factory regarding sensor compatibility.

APPROVALS

Damp Rated.

DESIGNED BY

Serge Cornelissen.

REMOTE MOUNTING OF DRIVERS

Wire Size (max distance from canopy to drivers) 18 AWG - 9.5' (2.9m), 16 AWG - 19.5' (5.9m), 14 AWG - 29.5' (9.0m). Drivers must be accessible after installation.

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Integral emergency EU luminaires have a 10.5" (270mm) DIA x 2" (48mm) height canopy with LED charge indicator. Not available with a 347V supply.

DELIVERED LUMENS


Delivered lumens & LPW based on 4000K (min 80 CRI).

L70 @25°C

> 50,000 hrs.

DESIGN

US Pat. No. D893,083.

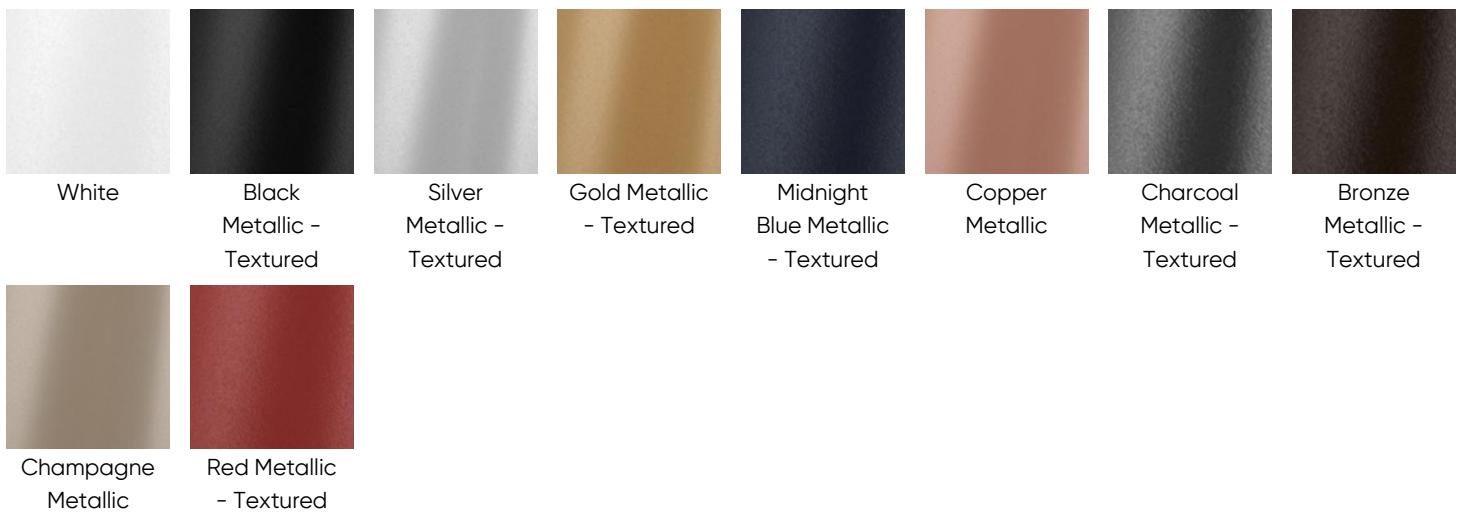5 DESIGN OPTIONS**FINISH****6 HOW TO ORDER****1. LUMINAIRE****WARC1P18** 18", 3300 lms**WARC1P24** 24", 4900 lms**2. LUMENS****LMA0200** 2000 lm**LMA0330** 3300 lm**LMA0490** 4900 lm¹ Available for WARC1P24 only.**3. CRI****CR80** CRI 80+**4. CCT****CTA27** 2700K**CTA30** 3000K**CTA35** 3500K**CTA40** 4000K**5. VOLTAGE****V1** 120/277V**V2** 240V ¹**V3** 347V ²¹ Not available in North America.² Available with DA01 dimming only.

6. DIMMING

DA01 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹
DA30 DSI/switchDim ^{1,2}

¹ Not available with V3. ² Not available in North America.

7. FINISH

FA01 White	FA02 Black Metallic - Textured	FA20 Silver Metallic - Textured	FA25 Gold Metallic - Textured
FA44 Midnight Blue Metallic - Textured	FA45 Copper Metallic	FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured
FA52 Champagne Metallic	FA53 Red Metallic - Textured		

8. EMERGENCY

E0 Not required **E1** Emergency system - Integral **E2** Emergency system - Remote

9. DIRECT SPOT

DL00 Not required	DL27 Downlight 28W, 2700K (1730 delivered lms)	DL30 Downlight 28W, 3000K (1799 delivered lms)	DL35 Downlight 28W, 3500K (1854 delivered lms)
DL40 Downlight 28W, 4000K (1858 delivered lms)			

Beam angle for Downlight Spot is 40°.

CIRCUITS

CS1 Single Circuit **CS2** Dual Circuit

7 TECHNICAL DATA

LUMINAIRE

Code	WARC1P18	WARC1P24
Diameter (A)	18"	24"
Wattage	22W	34W
Delivered lms	3300	4900
LPW	146	145
Height (B)	6"	6.5"

8 DIMENSIONAL DIAGRAMS

