

WARP HEMI™ - SUSPENDED

Project Name:	Fixture Type:
Fixture Code:	Quantities:



WARP HEMI™ - SUSPENDED



# WARP HEMI™ - SUSPENDED

Our dual circuit luminaire delivers high efficiency diffused, spot and direct light, allowing you to transition from general ambient to mood lighting. Available in two sizes 18" & 24", the **WARP** family offers two styles of pendant plus a ceiling mounted version. The color temperature of each light source can be individually selected to deliver an effect best suited to the application. New to the WARP are a wide array of contemporary decorative colors to accent your architectural scene.

## GENERAL SPECIFICATION

### Body

Aluminum and steel.

### Diffuser

Acrylic.

### Remote emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

### Suspension

Power over Suspension. Standard power options available, consult factory.

### Delivered lumens

Delivered lumens & LPW based on 4000K (min 80 CRI).

### Approvals

Damp Rated.

### Designed by

Serge Cornelissen

### Canopy finish

Powder coated.

### Sensors

Consult factory regarding sensor compatibility.

### Drivers

HPF electronic drivers for 120-277V, 347V, (EU-240V). The driver is integral to the fixture housing.

### Mechanical

Luminaires mount directly to a J box (by others - North America only).

### Reported L70 @25°C (77°F)

> 50,000 hrs.


### Design

US Pat. No. D897,589

## OPTICS & FEATURES




Suspended Direct



Direct



Spot Only 40°



Declare



# WARP HEMI™ - SUSPENDED

## HOW TO ORDER

### A. LUMINAIRE

**WHPP1P18** 18", 3300 lms                      **WHPP1P24** 24", 4900 lms

### B. LUMENS

**LMA0200** 2000 lm                      **LMA0330** 3300 lm                      **LMA0490** 4900 lm <sup>1</sup>

<sup>1</sup> Available for WHPP1P24 only.

### C. CRI

**CR80** CRI 80+

### D. CCT - DIRECT

**CTA27** 2700K                      **CTA30** 3000K                      **CTA35** 3500K                      **CTA40** 4000K

### E. CCT - DOWNLIGHT SPOT

**CTC00** Not required                      **CTC27** 2700K, 1700 lms                      **CTC30** 3000K, 1800 lms                      **CTC35** 3500K, 1900 lms  
**CTC40** 4000K, 1900 lms

Beam angle for Downlight Spot is 40°.

### F. VOLTAGE

**V1** 120/277V                      **V2** 240V <sup>1</sup>                      **V3** 347V <sup>2</sup>

<sup>1</sup> Not available in North America.  
<sup>2</sup> Available with DA01 dimming only.

### G. DIMMING

**DA01** 0-10V Dimming 1.0%                      **DA02** 0-10V Dimming 0.1% <sup>1</sup>                      **DA20** DALI Dimming 0.1% <sup>1</sup>                      **DA21** DALI Dimming 1.0% <sup>1</sup>  
**DA30** DSI/switchDim <sup>1 2</sup>

<sup>1</sup> Not available with 347V.  
<sup>2</sup> Not available in North America.

### H. FIXTURE FINISH

**FA01** White                      **FA02** Black Metallic - Textured                      **FA20** Silver Metallic - Textured                      **FA25** Gold Metallic - Textured  
**FA45** Copper Metallic                      **FA44** Midnight Blue Metallic - Textured                      **FA46** Charcoal Metallic - Textured                      **FA47** Bronze Metallic - Textured  
**FA52** Champagne Metallic                      **FA53** Red Metallic - Textured

### I. CANOPY

**CN1** Canopy A <sup>1</sup>                      **CN2** Canopy B <sup>2</sup>

<sup>1</sup> Drivers are integral within the canopy.  
<sup>2</sup> Drivers are in a remote box.

### J. CANOPY FINISH

**CF01** White                      **CF02** Black Metallic - Textured                      **CF20** Silver Metallic - Textured                      **CF25** Gold Metallic - Textured  
**CF44** Midnight Blue Metallic - Textured                      **CF45** Copper Metallic                      **CF46** Charcoal Metallic - Textured                      **CF47** Bronze Metallic - Textured  
**CF52** Champagne Metallic                      **CF53** Red Metallic - Textured

# WARP HEMI™ - SUSPENDED

## K. EMERGENCY

**E0** Not required                      **E2** Emergency system - Remote

## CIRCUITS

**CS1** Single circuit                      **CS2** Dual circuit




# WARP HEMI™ - SUSPENDED

## TECHNICAL DATA


### LUMINAIRE

Code	WHPP1P18	WHPP1P24
Diameter (A)	18"	24"
Light Direction	Direct	Direct
Wattage	22W	34W
Delivered lms	3300	4900
LPW	146	145
Height (B)	6"	6.5"


### FIXTURE FINISH




White




Black Metallic -  
Textured




Silver Metallic -  
Textured




Gold Metallic -  
Textured




Copper Metallic




Midnight Blue Metallic -  
Textured




Charcoal Metallic -  
Textured



Bronze Metallic -  
Textured




Champagne Metallic




Red Metallic -  
Textured


### CANOPY FINISH




White




Black Metallic -  
Textured




Silver Metallic -  
Textured




Gold Metallic -  
Textured




Midnight Blue Metallic -  
Textured




Copper Metallic




Charcoal Metallic -  
Textured



Bronze Metallic -  
Textured



Champagne Metallic



Red Metallic -  
Textured

### APPROVALS














DIMENSIONAL DIAGRAMS

Warp Hemi Pendant 18" / 24"  
CN1 - Canopy A (Integral)

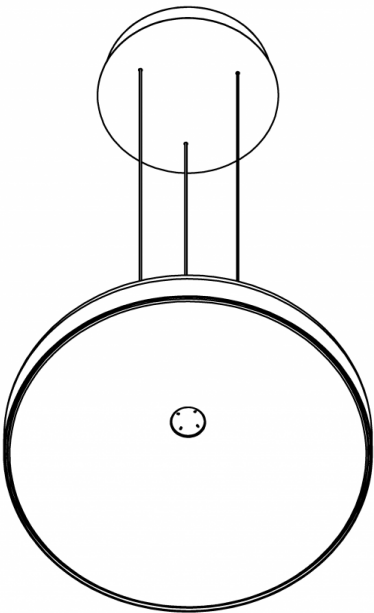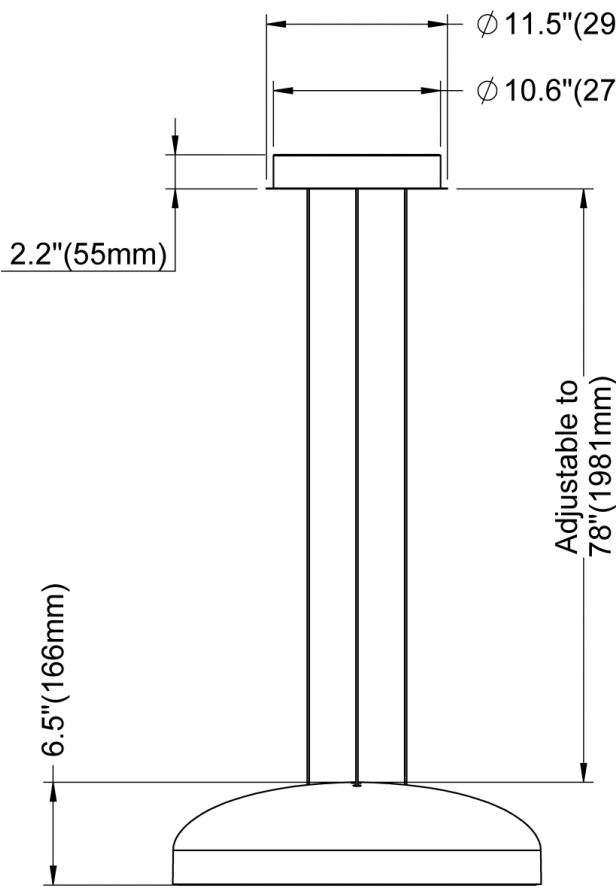



Isometric View

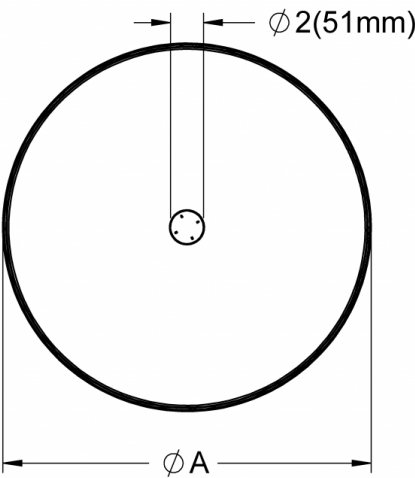


Diameter	Warp Hemi 18"	Warp Hemi 24"
A	17.7" (450mm)	23.4" (594mm)

Warp Hemi Pendant 18" / 24"

CN2 - Canopy B (Remote)

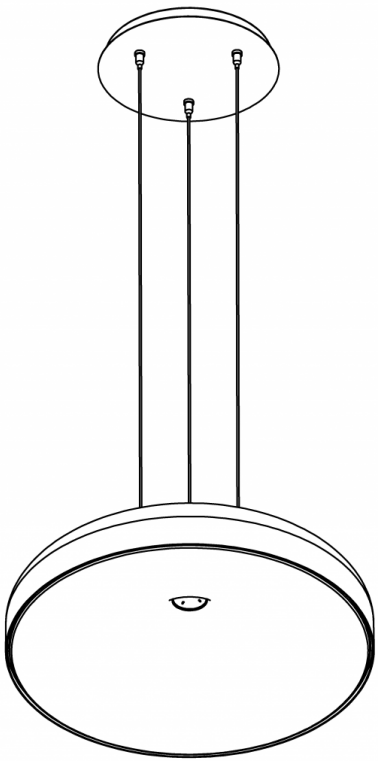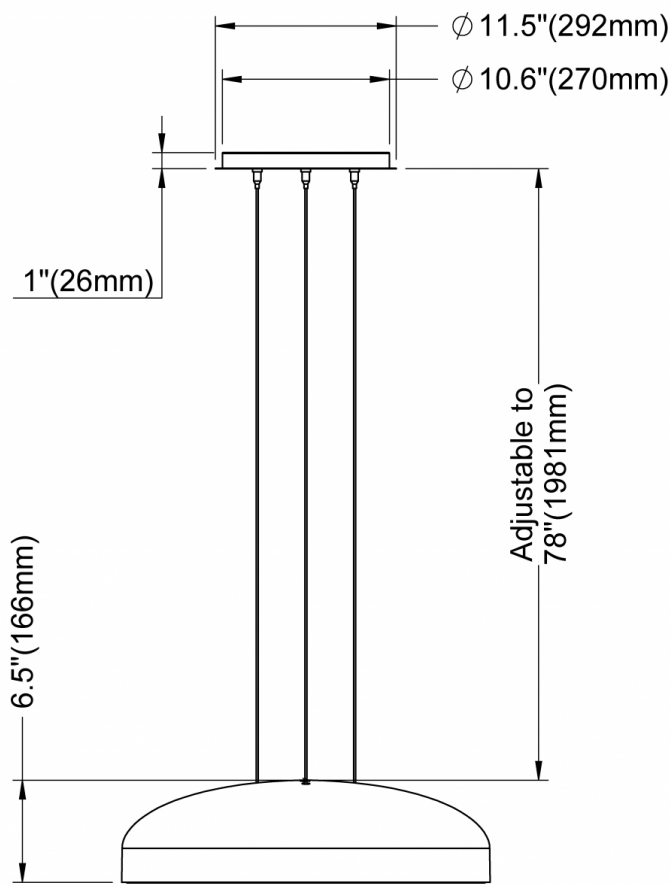

Isometric View

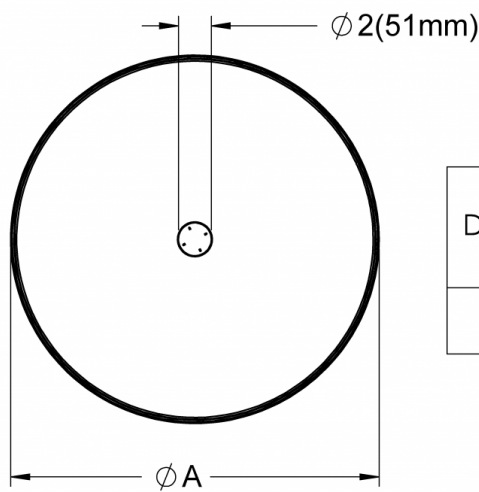

Diameter	Warp Hemi 18"	Warp Hemi 24"
A	17.7" (450mm)	23.4" (594mm)