Project Name: Fixture Type:

Fixture Code: Quantities:











Our dual circuit luminaire delivers high efficiency diffused, spot and direct light, allowing you to transition from general ambient to mood lighting. The direct spot light also comes with multiple packages that can give you a different lumen output and color temperature. Available in two sizes 18" & 24", the **WARP** family offers two styles of pendant plus a ceiling mounted version. The color temperature of each light source can be individually selected to deliver an effect best suited to the application. New to the **WARP** are a wide array of contemporary decorative colors to accent your architectural scene.

#### **GENERAL SPECIFICATION**

#### **Body**

Aluminum and steel.

#### Lens

Acrylic.

#### Remote emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

#### Suspension

Power over Suspension. Standard power options available, consult factory.

#### **Delivered lumens**

Delivered lumens & LPW based on 4000K (min 80 CRI).

#### **Approvals**

Damp Rated.

#### Designed by

Serge Cornelissen

### **OPTICS & FEATURES**









Spot Only 40°

#### Canopy finish

Powder coated.

#### Sensors

Consult factory regarding sensor compatibility.

#### Drivers

HPF electronic drivers for 120–277V, 347V, (EU–240V). The driver is integral to the fixture housing.

#### Mechanical

Luminaires mount directly to a J box (by others - North America only).

#### Reported L70 @25°C (77°F)

> 50,000 hrs.

#### Design

US Pat. No. D897,589

#### **HOW TO ORDER**

#### A. LUMINAIRE

**WHPP1P18** 18", 3300 lms **WHPP1P24** 24", 4900 lms

**B. LUMENS** 

**LMA0200** 2000 lm **LMA0330** 3300 lm **LMA0490** 4900 lm <sup>1</sup>

#### C. CRI

CR80 CRI 80+

#### D. CCT - DIRECT

#### **E. CCT - DIRECT SPOT**

**CTC00** Not required **CTC27** 2700K, 1700 lms **CTC30** 3000K, 1800 lms **CTC35** 3500K, 1900 lms

CTC40 4000K, 1900 lms

Beam angle for Downlight Spot is 40°.

#### F. VOLTAGE

**V1** 120/277V **V2** 240V <sup>1</sup> **V3** 347V <sup>2</sup>

#### **G. DIMMING**

**DA01** 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% <sup>1</sup> **DA20** DALI Dimming 0.1% <sup>1</sup> **DA21** DALI Dimming 1.0% <sup>1</sup>

**DA30** DSI/switchDim <sup>1 2</sup>

### H. FIXTURE FINISH

FA01 WhiteFA02 Black Metallic - TexturedFA20 Silver Metallic - TexturedFA25 Gold Metallic - TexturedFA45 Copper MetallicFA44 Midnight Blue Metallic - TexturedFA46 Charcoal Metallic - TexturedFA47 Bronze Metallic - Textured

**FA52** Champagne Metallic **FA53** Red Metallic - Textured

#### I. CANOPY

**CN1** Canopy A <sup>1</sup> **CN2** Canopy B <sup>2</sup>

# J. CANOPY FINISH

CF01 White CF02 Black Metallic - Textured CF20 Silver Metallic - Textured CF25 Gold Metallic - Textured CF44 Midnight Blue Metallic - Textured CF45 Copper Metallic CF45 Copper Metallic CF46 Charcoal Metallic - Textured CF47 Bronze Metallic - Textured CF48 Bronze Metallic - Textured Bronze Bron

**CF52** Champagne Metallic **CF53** Red Metallic - Textured

<sup>&</sup>lt;sup>1</sup> Available for WHPP1P24 only.

<sup>&</sup>lt;sup>1</sup> Not available in North America.

<sup>&</sup>lt;sup>2</sup> Available with DA01 dimming only.

<sup>&</sup>lt;sup>1</sup> Not available with 347V.

<sup>&</sup>lt;sup>2</sup> Not available in North America.

<sup>&</sup>lt;sup>1</sup> Drivers are integral within the canopy.

<sup>&</sup>lt;sup>2</sup> Drivers are in a remote box.

## **K. EMERGENCY**

**E0** Not required **E2** Emergency system - Remote

**CIRCUITS** 

**CS1** Single circuit **CS2** Dual circuit

## **TECHNICAL DATA**

#### **LUMINAIRE**

WHPP1P18	WHPP1P24
18"	24"
Direct	Direct
22W	34W
3300	4900
146	145
6"	6.5"
	18" Direct 22W 3300

## **FIXTURE FINISH**





Black Metallic -

Textured



Textured



Gold Metallic -

Textured





Textured



Charcoal Metallic -

Textured



Bronze Metallic -

Textured





Champagne Metallic Red Metallic -Textured

# **CANOPY FINISH**





Textured



Silver Metallic -

Textured




Textured



Textured





Charcoal Metallic -

Textured



Textured



Champagne Metallic



Red Metallic -Textured

# **APPROVALS**















## **DIMENSIONAL DIAGRAMS**


# Warp Hemi Pendant 18" / 24"

CN1 - Canopy A (Integral)

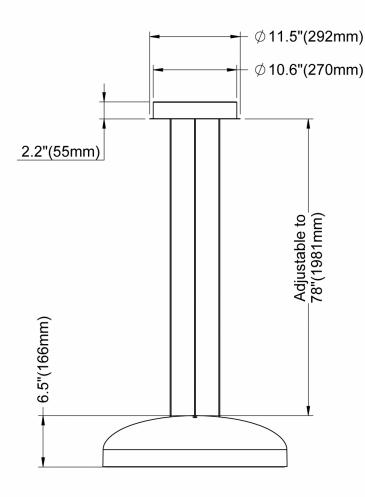

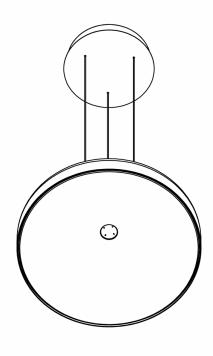


Isometric View





Diameter	Warp Hemi 18"	Warp Hemi 24"
А	17.7"(450mm)	23.4"(594mm)

# Warp Hemi Pendant 18" / 24"

CN2 - Canopy B (Remote)

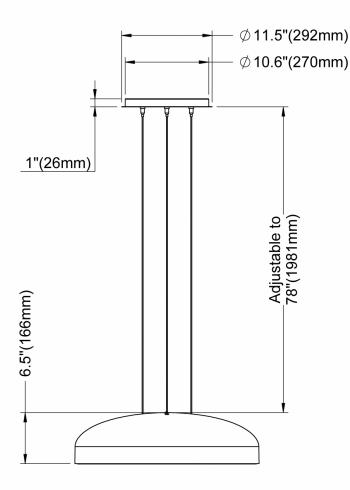

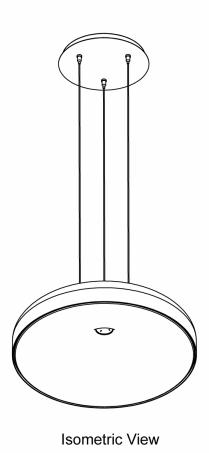



Diameter	Warp Hemi 18"	Warp Hemi 24"
Α	17.7''(450mm)	23.4"(594mm)