

WARP HEMI™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:



WARP HEMI™ - SUSPENDED



WARP HEMI™ - SUSPENDED

Our dual circuit luminaire delivers high efficiency diffused, spot and direct light, allowing you to transition from general ambient to mood lighting. Available in two sizes 18" & 24", the **WARP** family offers two styles of pendant plus a ceiling mounted version. The color temperature of each light source can be individually selected to deliver an effect best suited to the application. New to the WARP are a wide array of contemporary decorative colors to accent your architectural scene.

GENERAL SPECIFICATION

Body

Aluminum and steel.

Diffuser

Acrylic.

Remote emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

Suspension

Power over Suspension. Standard power options available, consult factory.

Delivered lumens

Delivered lumens & LPW based on 4000K (min 80 CRI).

Approvals

Damp Rated.

Designed by

Serge Cornelissen

Canopy finish

Powder coated.

Sensors

Consult factory regarding sensor compatibility.

Drivers

HPF electronic drivers for 120-277V, 347V, (EU-240V). The driver is integral to the fixture housing.

Mechanical

Luminaires mount directly to a J box (by others - North America only).

Reported L70 @25°C (77°F)

> 50,000 hrs.


Design

US Pat. No. D897,589

MOUNTING & OPTICS




Suspended Direct



Direct



Spot Only 40°



Declare



WARP HEMI™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

WHPP1P18 18", 3300 lms

WHPP1P24 24", 4900 lms

B. LUMENS

LMA0200 2000 lm

LMA0330 3300 lm

LMA0490 4900 lm ¹

¹ Available for WHPP1P24 only.

C. CRI

CR80 CRI 80+

D. CCT - DIRECT

CTA30 3000K

CTA35 3500K

CTA40 4000K

E. CCT - DOWNLIGHT SPOT

CTC00 Not required

CTC27 2700K, 1700 lms

CTC30 3000K, 1800 lms

CTC35 3500K, 1900 lms

CTC40 4000K, 1900 lms

Beam angle for Downlight Spot is 40°.

F. VOLTAGE

V1 120/277V

V2 240V ¹

V3 347V ²

¹ Not available in North America.

² Available with DA01 dimming only.

G. DIMMING

DA01 0-10V Dimming 1.0%

DA02 0-10V Dimming 0.1% ¹

DA20 DALI Dimming 0.1% ¹

DA21 DALI Dimming 1.0% ¹

DA30 DSI/switchDim ^{1 2}

¹ Not available with 347V.

² Not available in North America.

H. FIXTURE FINISH

FA01 White

FA02 Black Metallic - Textured

FA20 Silver Metallic - Textured

FA25 Gold Metallic - Textured

FA45 Copper Metallic

FA44 Midnight Blue Metallic - Textured

FA46 Charcoal Metallic - Textured

FA47 Bronze Metallic - Textured

FA52 Champagne Metallic

FA53 Red Metallic - Textured

I. CANOPY

CN1 Canopy A ¹

CN2 Canopy B ²

¹ Drivers are integral within the canopy.

² Drivers are in a remote box.

J. CANOPY FINISH

CF01 White

CF02 Black Metallic - Textured

CF20 Silver Metallic - Textured

CF25 Gold Metallic - Textured

CF44 Midnight Blue Metallic - Textured

CF45 Copper Metallic

CF46 Charcoal Metallic - Textured

CF47 Bronze Metallic - Textured

CF52 Champagne Metallic

CF53 Red Metallic - Textured



WARP HEMI™ - SUSPENDED

K. EMERGENCY

E0 Not required

E2 Emergency system - Remote

CIRCUITS

CS1 Single circuit

CS2 Dual circuit




WARP HEMI™ - SUSPENDED

TECHNICAL DATA


LUMINAIRE

| Code | WHPP1P18 | WHPP1P24 |
|-----------------|----------|----------|
| Diameter (A) | 18" | 24" |
| Light Direction | Direct | Direct |
| Wattage | 22W | 34W |
| Delivered lms | 3300 | 4900 |
| LPW | 146 | 145 |
| Height (B) | 6" | 6.5" |

FIXTURE FINISH

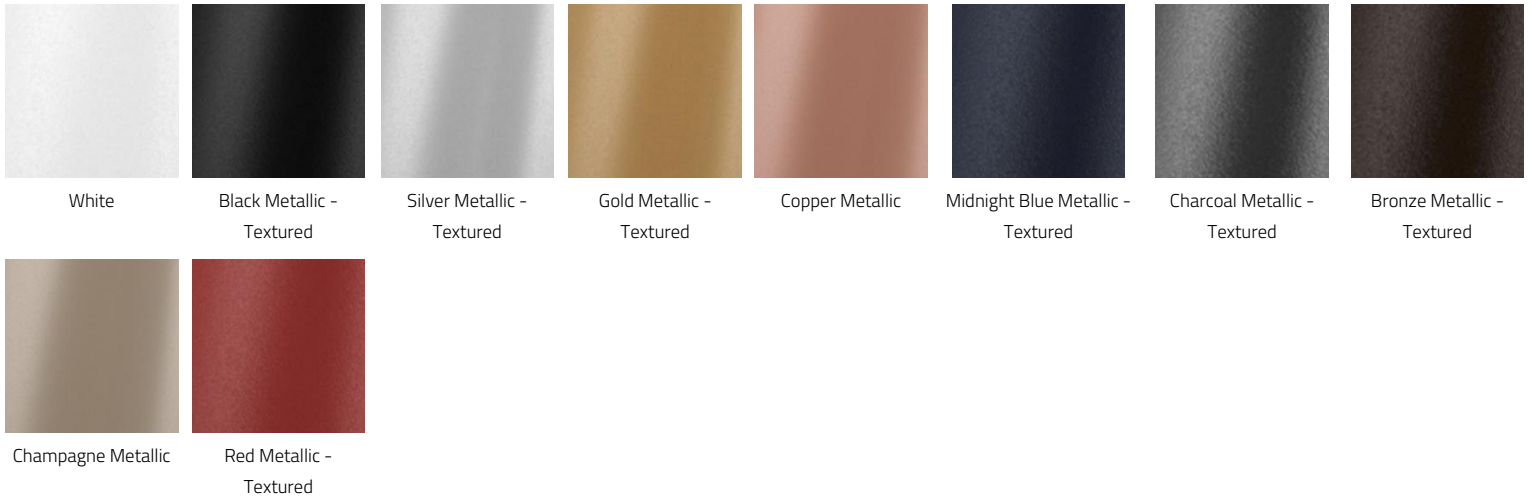

CANOPY FINISH

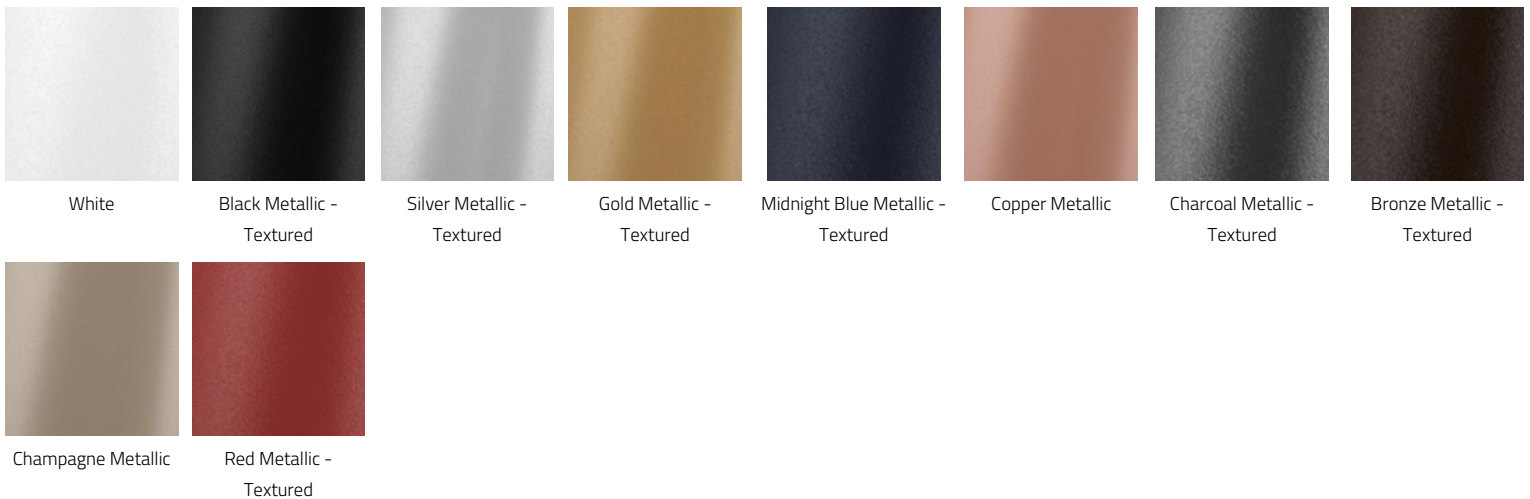



APPROVALS




WARP HEMI™ - SUSPENDED

DIMENSIONAL DIAGRAMS

Warp Hemi Pendant 18" / 24"
 CN1 - Canopy A (Integral)

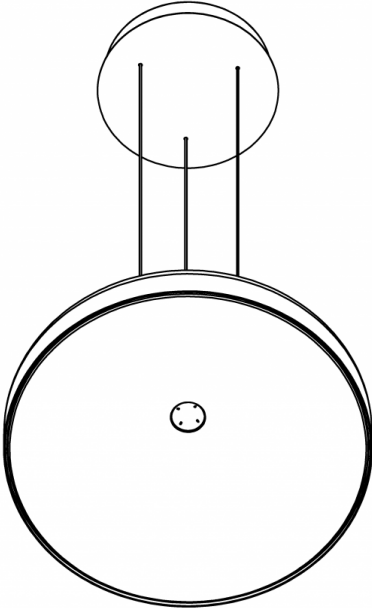
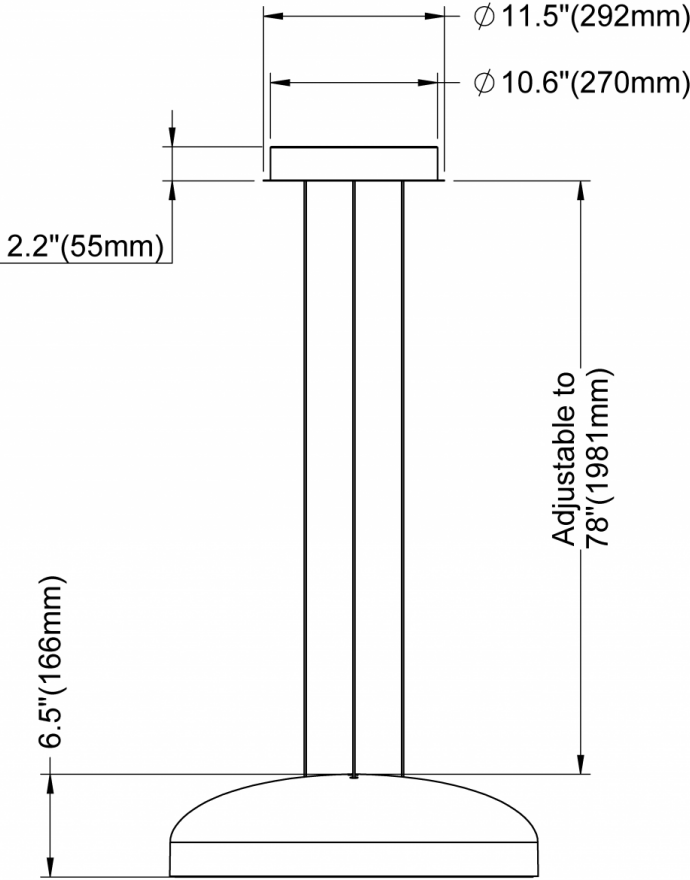


Isometric View

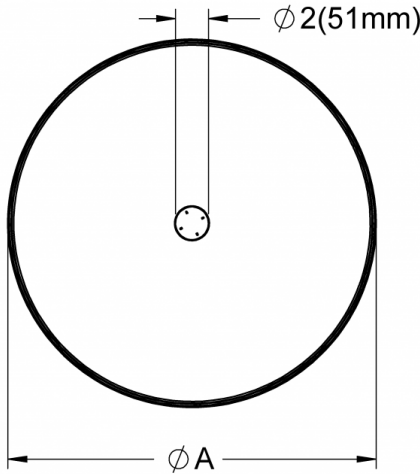


| Diameter | Warp Hemi 18" | Warp Hemi 24" |
|----------|---------------|---------------|
| A | 17.7" (450mm) | 23.4" (594mm) |

Warp Hemi Pendant 18" / 24"
 CN2 - Canopy B (Remote)

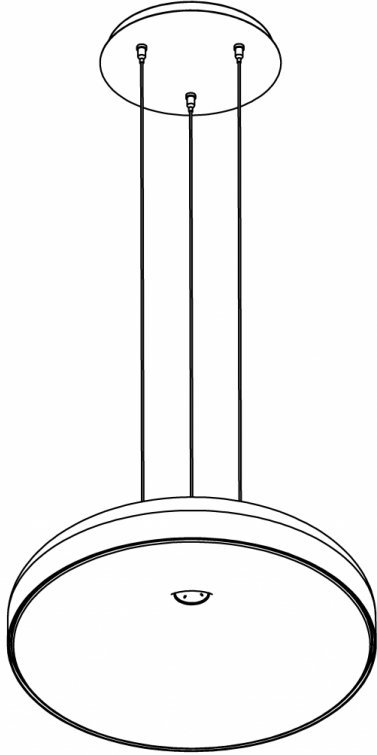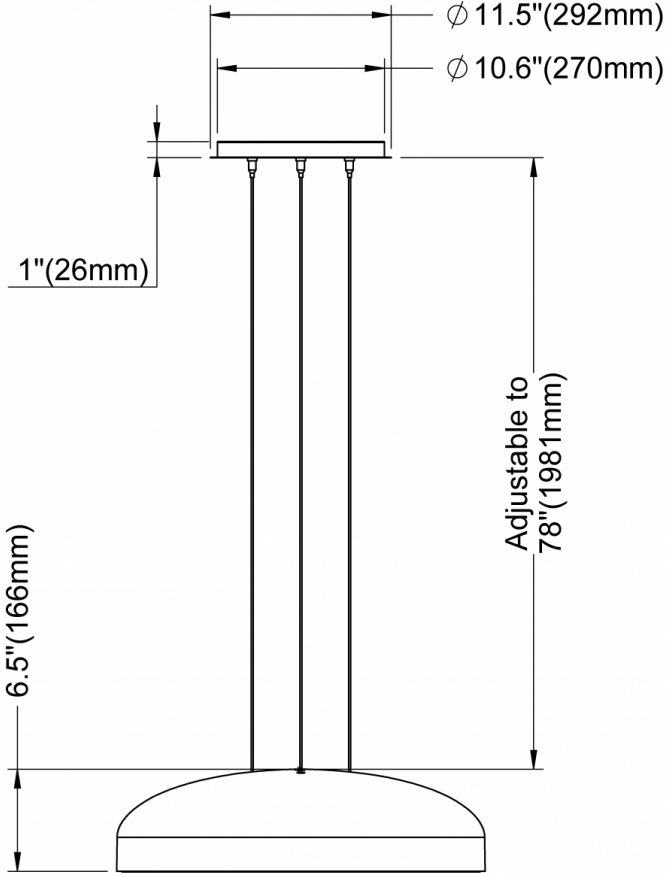

Isometric View

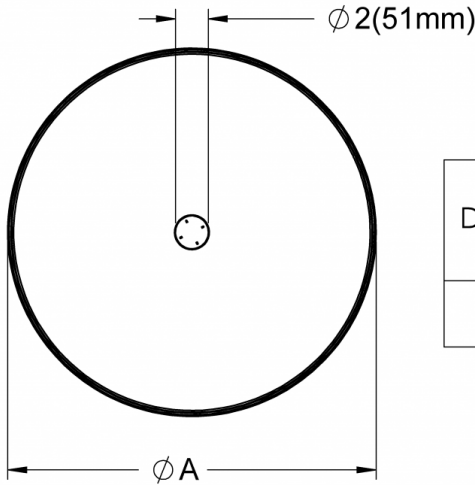

| Diameter | Warp Hemi 18" | Warp Hemi 24" |
|----------|---------------|---------------|
| A | 17.7" (450mm) | 23.4" (594mm) |