

# WARP HEMI™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:



# WARP HEMI™ - SUSPENDED



# WARP HEMI™ - SUSPENDED

Our dual circuit luminaire delivers high efficiency diffused, spot and direct light, allowing you to transition from general ambient to mood lighting. Available in two sizes 18" & 24", the **WARP** family offers two styles of pendant plus a ceiling mounted version. The color temperature of each light source can be individually selected to deliver an effect best suited to the application. New to the WARP are a wide array of contemporary decorative colors to accent your architectural scene.

## GENERAL SPECIFICATION

### Body

Aluminum and steel.

### Diffuser

Acrylic.

### Remote emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

### Suspension

Power over Suspension. Standard power options available, consult factory.

### Delivered lumens

Delivered lumens & LPW based on 4000K (min 80 CRI).

### Approvals

Damp Rated.

### Designed by

Serge Cornelissen

### Canopy finish

Powder coated.

### Sensors

Consult factory regarding sensor compatibility.

### Drivers

HPF electronic drivers for 120-277V, 347V, (EU-240V). The driver is integral to the fixture housing.

### Mechanical

Luminaires mount directly to a J box (by others - North America only).

### Reported L70 @25°C (77°F)

> 50,000 hrs.

### Design

US Pat. No. D897,589

## MOUNTING & OPTICS



Suspended Direct

Direct

Spot Only 40°

Declare

# WARP HEMI™ - SUSPENDED

## HOW TO ORDER

### A. LUMINAIRE

**WHPP1P18** 18", 3300 lms

**WHPP1P24** 24", 4900 lms

### B. LUMENS

**LMA0200** 2000 lm

**LMA0330** 3300 lm

**LMA0490** 4900 lm <sup>1</sup>

<sup>1</sup> Available for WHPP1P24 only.

### C. CRI

**CR80** CRI 80+

### D. CCT - DIRECT

**CTA27** 2700K

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

### E. CCT - DOWNLIGHT SPOT

**CTC00** Not required

**CTC27** 2700K, 1700 lms

**CTC30** 3000K, 1800 lms

**CTC35** 3500K, 1900 lms

**CTC40** 4000K, 1900 lms

Beam angle for Downlight Spot is 40°.

### F. VOLTAGE

**V1** 120/277V

**V2** 240V <sup>1</sup>

**V3** 347V <sup>2</sup>

<sup>1</sup> Not available in North America.

<sup>2</sup> Available with DA01 dimming only.

### G. DIMMING

**DA01** 0-10V Dimming 1.0%

**DA02** 0-10V Dimming 0.1% <sup>1</sup>

**DA20** DALI Dimming 0.1% <sup>1</sup>

**DA21** DALI Dimming 1.0% <sup>1</sup>

**DA30** DSI/switchDim <sup>1 2</sup>

<sup>1</sup> Not available with 347V.

<sup>2</sup> Not available in North America.

### H. FIXTURE FINISH

**FA01** White

**FA02** Black Metallic - Textured

**FA20** Silver Metallic - Textured

**FA25** Gold Metallic - Textured

**FA45** Copper Metallic

**FA44** Midnight Blue Metallic - Textured

**FA46** Charcoal Metallic - Textured

**FA47** Bronze Metallic - Textured

**FA52** Champagne Metallic

**FA53** Red Metallic - Textured

### I. CANOPY

**CN1** Canopy A <sup>1</sup>

**CN2** Canopy B <sup>2</sup>

<sup>1</sup> Drivers are integral within the canopy.

<sup>2</sup> Drivers are in a remote box.

### J. CANOPY FINISH

**CF01** White

**CF02** Black Metallic - Textured

**CF20** Silver Metallic - Textured

**CF25** Gold Metallic - Textured

**CF44** Midnight Blue Metallic - Textured

**CF45** Copper Metallic

**CF46** Charcoal Metallic - Textured

**CF47** Bronze Metallic - Textured

**CF52** Champagne Metallic

**CF53** Red Metallic - Textured



# WARP HEMI™ - SUSPENDED

## K. EMERGENCY

**E0** Not required

**E2** Emergency system - Remote

## CIRCUITS

**CS1** Single circuit

**CS2** Dual circuit






# WARP HEMI™ - SUSPENDED

## TECHNICAL DATA


### LUMINAIRE

Code	WHPP1P18	WHPP1P24
Diameter (A)	18"	24"
Light Direction	Direct	Direct
Wattage	22W	34W
Delivered lms	3300	4900
LPW	146	145
Height (B)	6"	6.5"

### FIXTURE FINISH

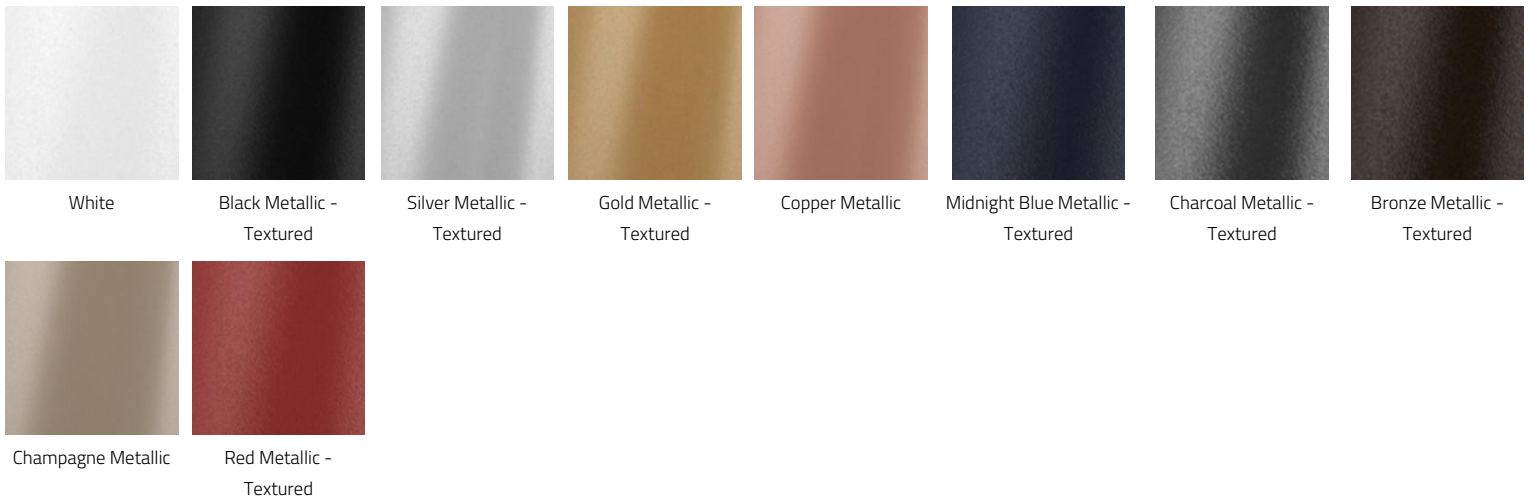

### CANOPY FINISH

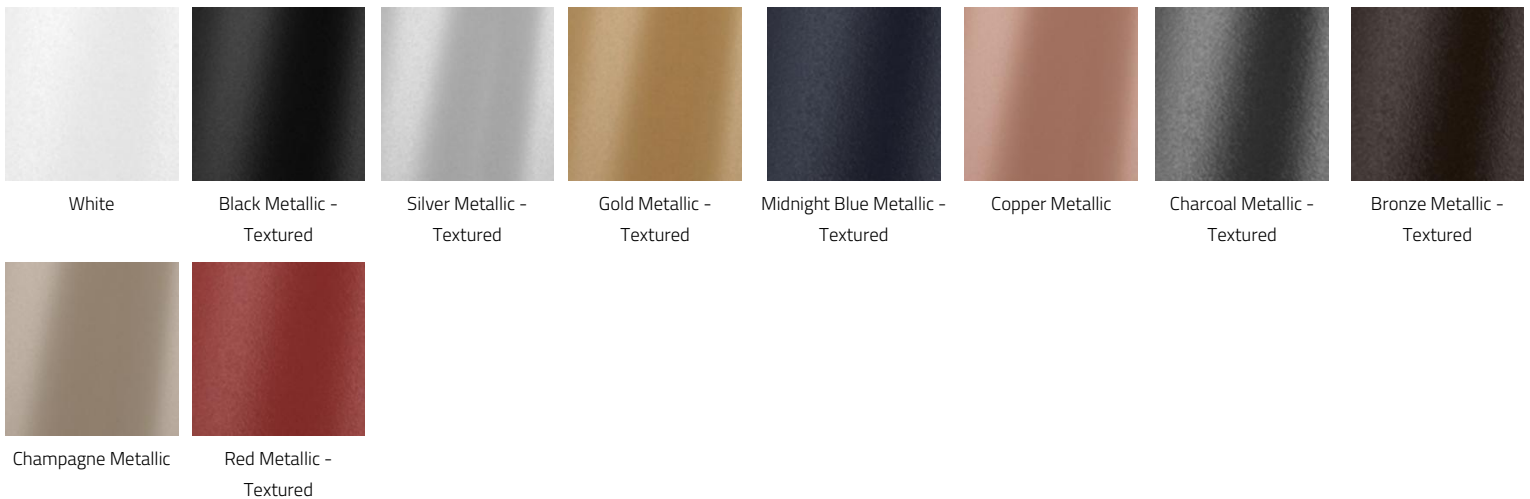



### APPROVALS




**WARP HEMI™ - SUSPENDED**

**DIMENSIONAL DIAGRAMS**

**Warp Hemi Pendant 18" / 24"**  
 CN1 - Canopy A (Integral)

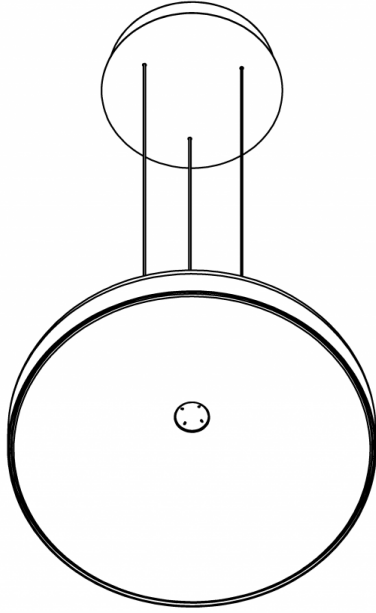
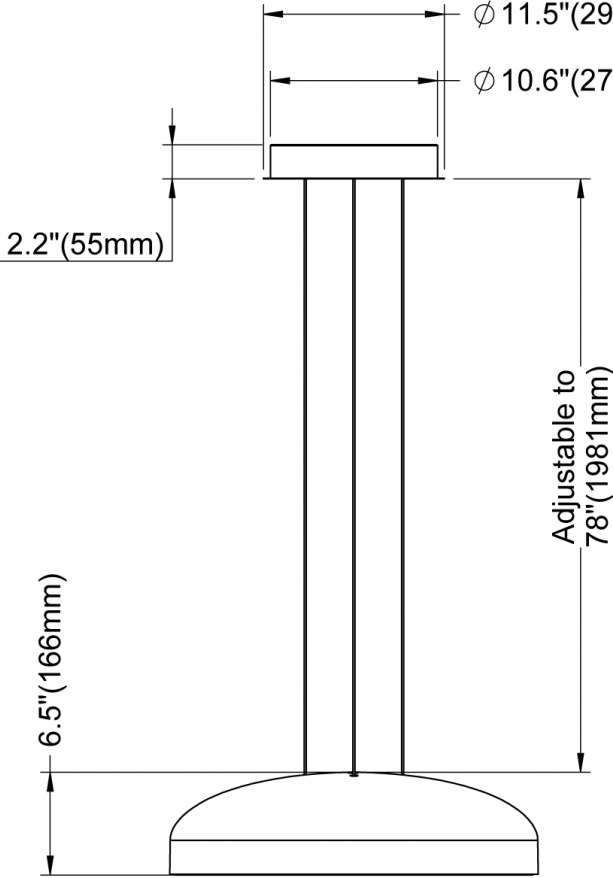


Isometric View

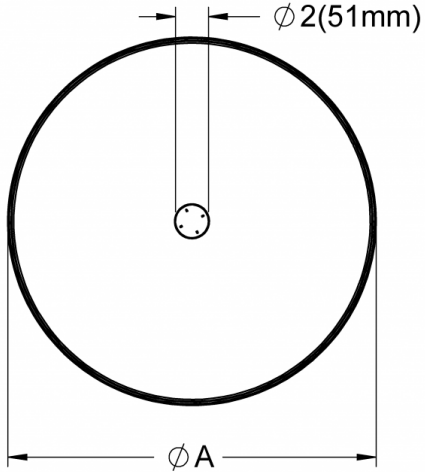


Diameter	Warp Hemi 18"	Warp Hemi 24"
A	17.7" (450mm)	23.4" (594mm)

Warp Hemi Pendant 18" / 24"  
 CN2 - Canopy B (Remote)

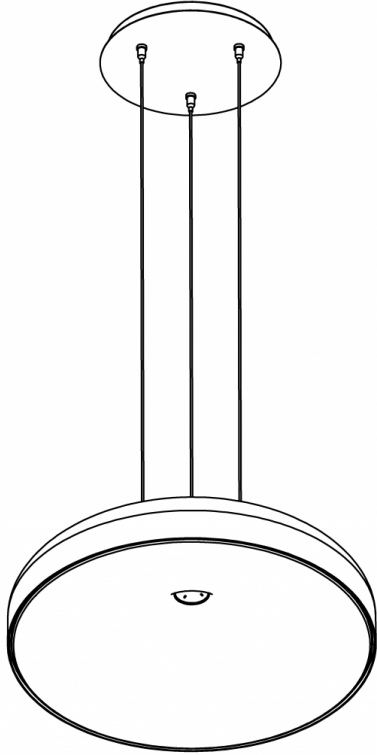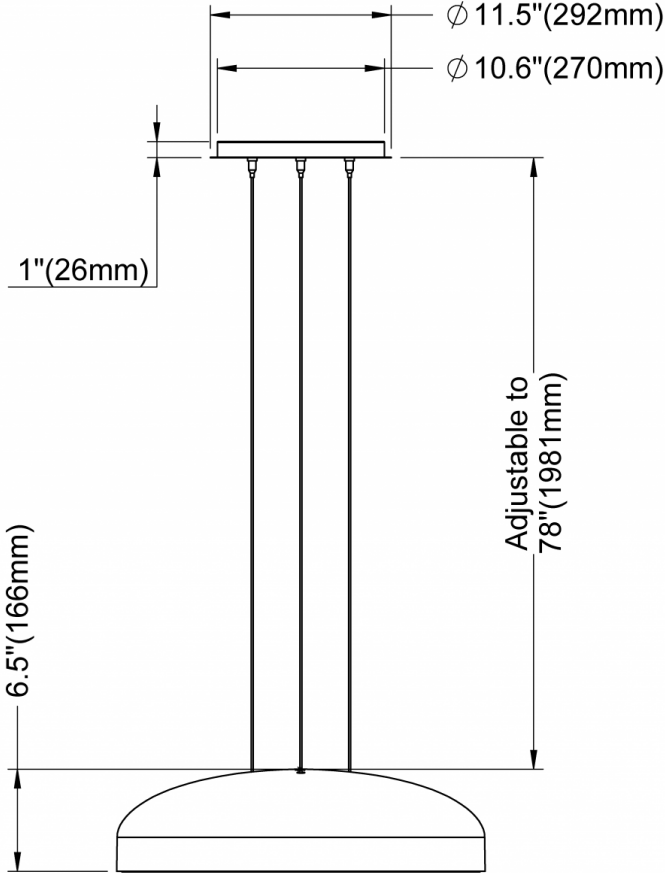

Isometric View

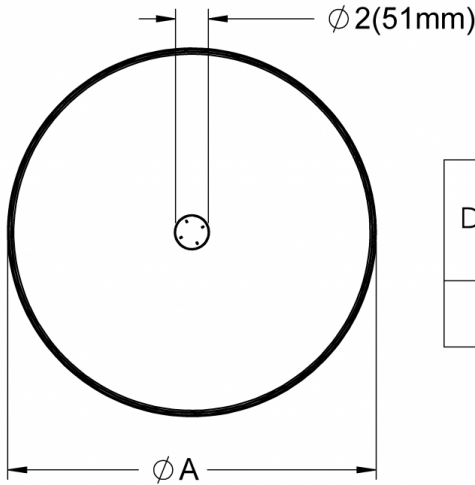

Diameter	Warp Hemi 18"	Warp Hemi 24"
A	17.7" (450mm)	23.4" (594mm)