
WARP™ - POWER CORD SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:

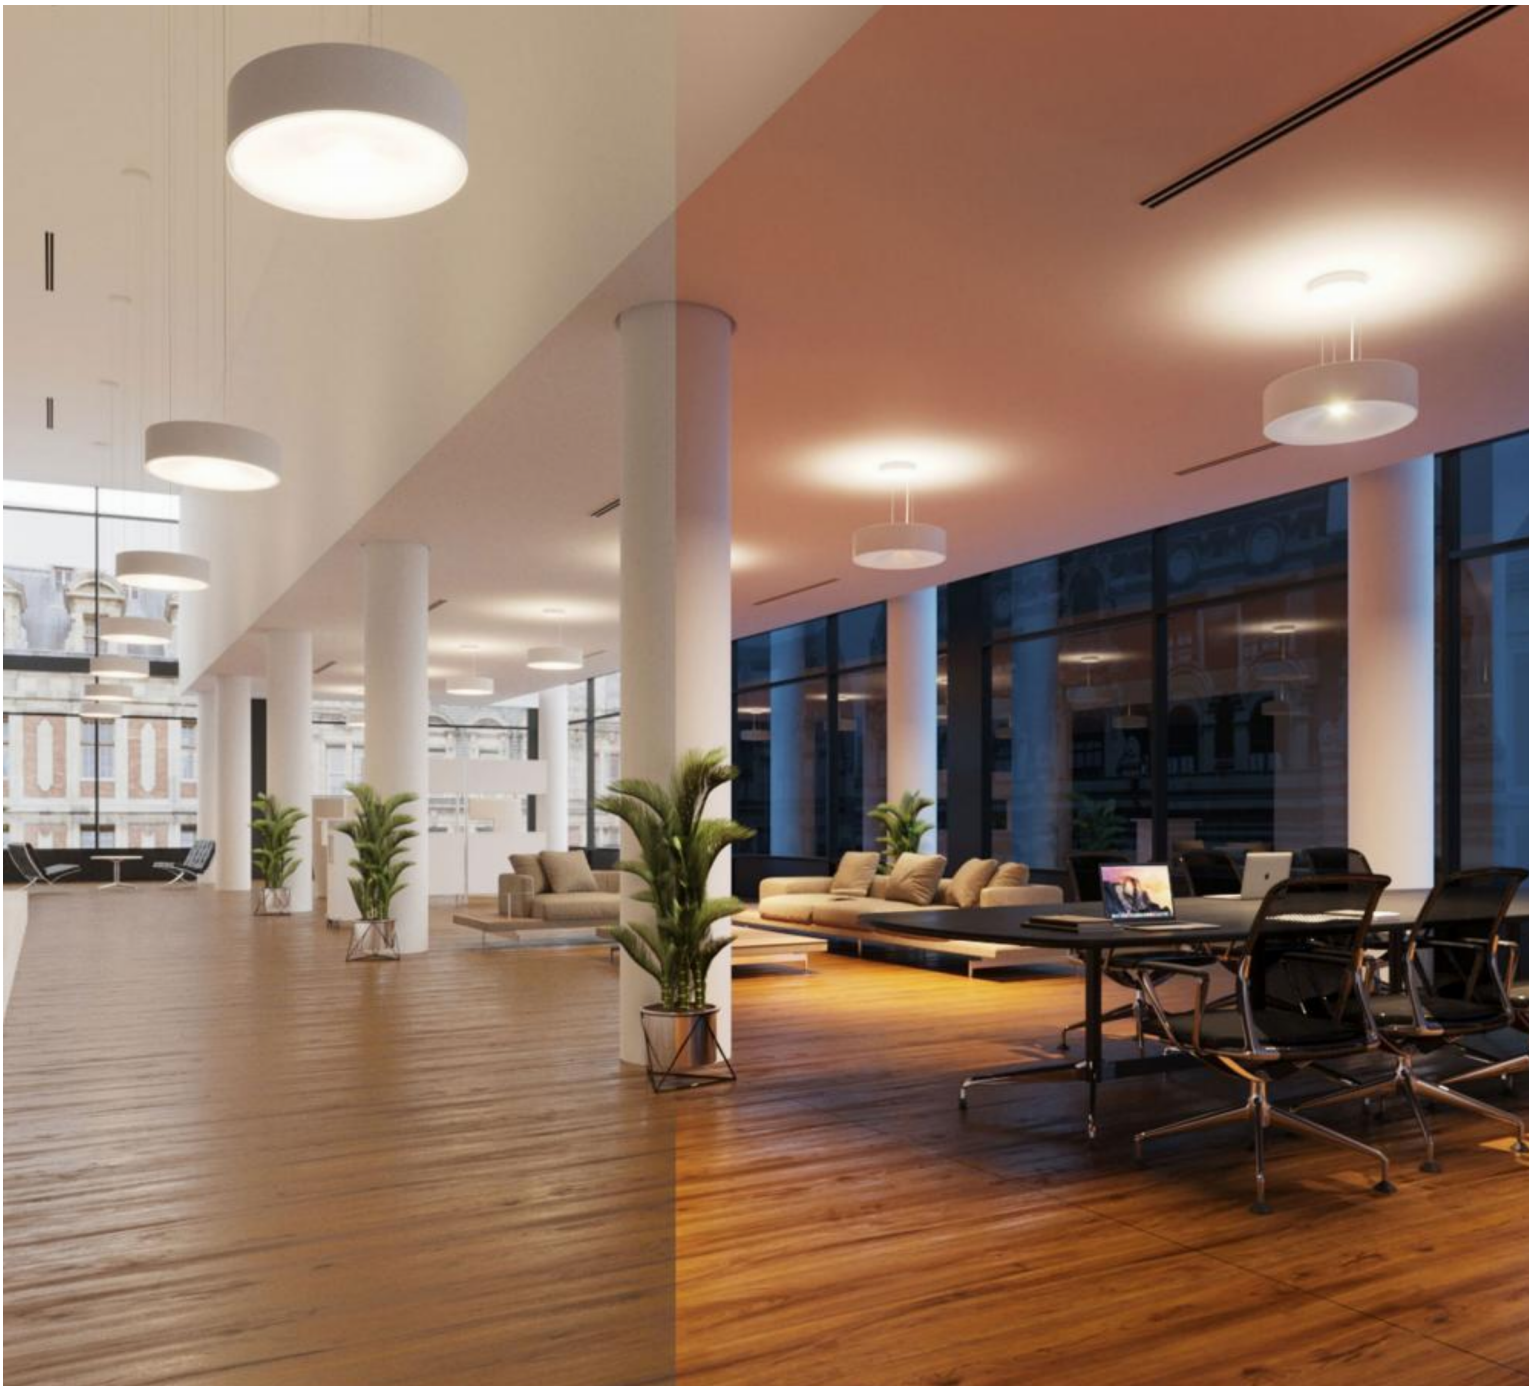

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WARP™ - POWER CORD SUSPENDED









© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WARP™ - POWER CORD SUSPENDED

Our revolutionary triple circuit luminaire delivers high efficiency diffused, spot and indirect light, allowing you to transition from general ambient to mood lighting. Available in two sizes 18" (457mm) & 24" (610mm), the **WARP** family offers two styles of pendant plus a ceiling mounted version. The color temperature of each light source can be individually selected to deliver an effect best suited to the application. New to the WARP are a wide array of contemporary decorative colors to accent your architectural scene.

GENERAL SPECIFICATION

Body
Aluminum and steel.

Suspension
Steel cables.

Integral emergency system
Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Integral emergency EU luminaires have a 10.5" (270mm) DIA x 2" (48mm) height canopy with LED charge indicator. Not available with a 347V supply.

Lens
Acrylic.

Remote mounting of drivers
Wire Size (max distance from canopy to drivers) 18 AWG - 9.5' (2.9m), 16 AWG - 19.5' (5.9m), 14 AWG - 29.5' (9.0m). Drivers must be accessible after installation.

Delivered lumens
Delivered lumens & LPW based on 4000K (min 80 CRI).

Approvals
Damp Location (Indoor use only).

Designed by
Serge Cornelissen.

Canopy finish
Powder coated.

Power cable
Silver braided.

Remote emergency
Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

Drivers
HPF electronic drivers for 120-277V, 347V, (EU-240V)

Mechanical
Luminaires mount directly to a J box (by others - North America only).

L70 @25°C
> 50,000 hrs.

Design
US Pat. No. D893,083.

OPTICS & FEATURES


Suspended Direct


Suspended Direct/Indirect

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WARP™ - POWER CORD SUSPENDED

HOW TO ORDER

A. LUMINAIRE

WARP1P18 18", Direct, 3300 lms Direct
WARP1P24 24", Direct, 4900 lms Direct
WARP2P18 18", Direct/Indirect, 3300 lms Direct, 2400 lms Indirect
WARP2P24 24", Direct/Indirect, 4900 lms Direct, 2400 lms Indirect

B. LUMENS (DIRECT)

LMA0200 2000 lm
LMA0330 3300 lm
LMA0490 4900 lm

C. LUMENS (INDIRECT)

LMB0000 Not required
LMB0120 1200 lm
LMB0180 1800 lm
LMB0240 2400 lm

D. CRI

CR80 CRI 80+

E. CCT

CTA27 2700K
CTA30 3000K
CTA35 3500K
CTA40 4000K

F. INDIRECT LENS

UD0 Not required
UD1 Clear
UD2 Opal

G. VOLTAGE

V1 120/277V
V2 240V [1]
V3 347V [2]

[1] Not available in North America.
[2] Available with DA01 dimming only.

H. DIMMING

DA01 0-10V Dimming 1.0%
DA02 0-10V Dimming 0.1% [1]
DA20 DALI Dimming 0.1% [1]
DA21 DALI Dimming 1.0% [1]
DA30 DSI/switchDim [1] [2]

[1] Not available with V3.
[2] Not available in North America.

I. FIXTURE FINISH

FA01 White
FA02 Black Metallic - Textured
FA20 Silver Metallic - Textured
FA25 Gold Metallic - Textured
FA44 Midnight Blue Metallic - Textured
FA45 Copper Metallic
FA46 Charcoal Metallic - Textured
FA47 Bronze Metallic - Textured
FA52 Champagne Metallic
FA53 Red Metallic - Textured

J. CANOPY FINISH

CF01 White
CF02 Black Metallic - Textured
CF20 Silver Metallic - Textured
CF25 Gold Metallic - Textured
CF44 Midnight Blue Metallic - Textured
CF45 Copper Metallic
CF46 Charcoal Metallic - Textured
CF47 Bronze Metallic - Textured
CF52 Champagne Metallic
CF53 Red Metallic - Textured

K. EMERGENCY

E0 Not required
E1 Emergency system - Integral
E2 Emergency system - Remote

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WARP™ - POWER CORD SUSPENDED

L. DIRECT SPOT

DL00 Not required

DL27 Downlight 28W, 2700K (1730 delivered lms)

DL30 Downlight 28W, 3000K (1799 delivered lms)

DL35 Downlight 28W, 3500K (1854 delivered lms)

DL40 Downlight 28W, 4000K (1858 delivered lms)

CIRCUITS

CS1 Single Circuit [1]

CS2 Dual Circuit [2]

CS3 Triple Circuit [3]

[1] The entire fixture will be on one circuit, 1 power cable will be supplied.
[2] Spot light will be on a separate circuit from the main fixture. One power cable will be supplied. If the Spot light is not selected, then Direct and Indirect will be on a separate circuit.
[3] Direct, Indirect and Spot light will all be on separate circuits. Two power cables will be supplied.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WARP™ - POWER CORD SUSPENDED

TECHNICAL DATA

LUMINAIRE

Code	WARP1P18	WARP1P24	WARP2P18	WARP2P24
Diameter (A)	18"	24"	18"	24"
Light Direction	Direct	Direct	Direct/Indirect	Direct/Indirect
Wattage	22W	34W	43W	54W
Delivered lms (Direct)	3300	4900	3300	4900
Delivered lms (Indirect)			2400	2400
LPW	146	145	131	132
Height (B)	6"	6.5"	6"	6.5"


FIXTURE FINISH

White


Black Metallic - Textured


Silver Metallic - Textured


Gold Metallic - Textured


Midnight Blue Metallic - Textured


Copper Metallic


Charcoal Metallic - Textured


Bronze Metallic - Textured


Champagne Metallic


Red Metallic - Textured


CANOPY FINISH

White


Black Metallic - Textured


Silver Metallic - Textured


Gold Metallic - Textured


Midnight Blue Metallic - Textured


Copper Metallic


Charcoal Metallic - Textured


Bronze Metallic - Textured


Champagne Metallic


Red Metallic - Textured

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WARP™ - POWER CORD SUSPENDED


APPROVALS



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WARP™ - POWER CORD SUSPENDED

DIMENSIONAL DIAGRAMS



© 2026 Beta-Calco Inc. Specifications are subject to change without notice