
Project Name: Fixture Type:

Fixture Code: Quantities:







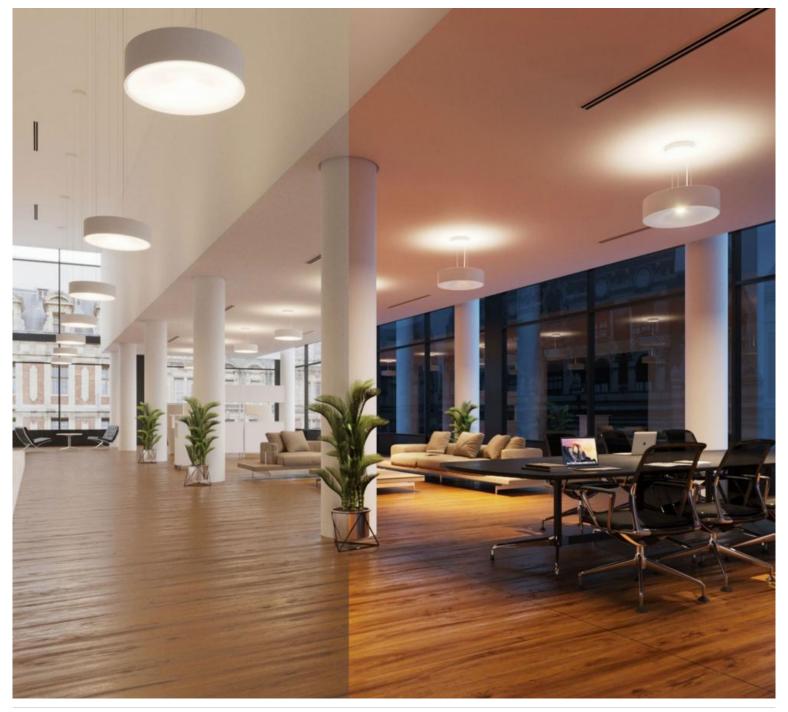



Our revolutionary triple circuit luminaire delivers high efficiency diffused, spot and indirect light, allowing you to transition from general ambient to mood lighting. Available in two sizes 18" (457mm) & 24" (610mm), the **WARP** family offers two styles of pendant plus a ceiling mounted version. The color temperature of each light source can be individually selected to deliver an effect best suited to the application. New to the WARP are a wide array of contemporary decorative colors to accent your architectural scene

#### **GENERAL SPECIFICATION**

#### Body

Aluminum and steel.

## Suspension

Steel cables.

#### Integral emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Integral emergency EU luminaires have a 10.5" (270mm) DIA x 2" (48mm) height canopy with LED charge indicator. Not available with a 347V supply.

#### Diffuser

Acrylic.

#### **Drivers**

HPF electronic drivers for 120-277V, 347V, (EU-240V)

## **Delivered lumens**

Delivered lumens & LPW based on 4000K (min 80 CRI).

#### **Approvals**

Damp Location (Indoor use only).

#### Designed by

Serge Cornelissen.

#### **OPTICS & FEATURES**





Suspended Direct Suspended Direct/Indirect

#### Canopy finish

Powder coated.

#### Power cable

Silver braided.

#### Remote emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

#### Mechanical

Luminaires mount directly to a J box (by others - North America only).

## L70 @25°C

> 50,000 hrs.

#### Design

US Pat. No. D893,083.

#### **HOW TO ORDER**

#### A. LUMINAIRE

**WARP1P18** 18", Direct, 3300 lms Direct **WARP1P24** 24", Direct, 4900 lms Direct **WARP2P18** 18", Direct/Indirect, 3300

**WARP2P18** 18", Direct/Indirect, 3300 Ims Direct, 2400 Ims Indirect

**WARP2P24** 24", Direct/Indirect, 4900 lms Direct, 2400 lms Indirect

**B. LUMENS (DIRECT)** 

**LMA0300** 2000 lm **LMA0330** 3300 lm **LMA0490** 4900 lm

**C. LUMENS (INDIRECT)** 

**LMB0000** Not required **LMB0120** 1200 lm **LMB0180** 1800 lm **LMB0240** 2400 lm

D. CRI

CR80 CRI 80+

E. CCT

F. UPLIGHT DIFFUSER

**UD0** Not required **UD1** Clear diffuser **UD2** Opal diffuser

**G. VOLTAGE** 

**V1** 120/277V **V2** 240V <sup>1</sup> **V3** 347V <sup>2</sup>

## H. DIMMING

**DA01** 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% <sup>1</sup> **DA20** DALI Dimming 0.1% <sup>1</sup> **DA21** DALI Dimming 1.0% <sup>1</sup> **DA30** DSI/switchDim <sup>1 2</sup>

### I. FIXTURE FINISH

FA01 WhiteFA02 Black Metallic - TexturedFA20 Silver Metallic - TexturedFA25 Gold Metallic - TexturedFA44 Midnight Blue Metallic - TexturedFA45 Copper MetallicFA46 Charcoal Metallic - TexturedFA47 Bronze Metallic - TexturedFA52 Champagne MetallicFA53 Red Metallic - Textured

## J. CANOPY FINISH

CF02 Black Metallic - Textured CF20 Silver Metallic - Textured CF25 Gold Metallic - Textured CF44 Midnight Blue Metallic - Textured CF45 Copper Metallic CF45 Copper Metallic - Textured CF45 Champagne Metallic - Textured CF52 Champagne Metallic CF53 Red Metallic - Textured CF54 Champagne Metallic CF55 Red Metallic - Textured CF55 Champagne Metallic CF55 Red Metallic - Textured CF55 Red Metallic - Textured CF56 Champagne Metallic CF57 Red Metallic - Textured CF57 Red Metallic -

#### **K. EMERGENCY**

**E0** Not required **E1** Emergency system – Integral **E2** Emergency system – Remote

<sup>&</sup>lt;sup>1</sup> Not available in North America.

<sup>&</sup>lt;sup>2</sup> Available with DA01 dimming only.

<sup>&</sup>lt;sup>1</sup> Not available with V3.

<sup>&</sup>lt;sup>2</sup> Not available in North America.

#### L. DOWNLIGHT SPOT

**DL00** Not required

**DL27** Downlight 28W, 2700K (1730

delivered lms)

**DL30** Downlight 28W, 3000K (1799 delivered lms)

**DL35** Downlight 28W, 3500K (1854 delivered Ims)

**DL40** Downlight 28W, 4000K (1858 delivered lms)

**CIRCUITS** 

CS1 Single Circuit 1

CS2 Dual Circuit 2

CS3 Triple Circuit 3

<sup>&</sup>lt;sup>1</sup> The entire fixture will be on one circuit, 1 power cable will be supplied.

<sup>&</sup>lt;sup>2</sup> Spot light will be on a separate circuit from the main fixture. One power cable will be supplied. If the Spot light is not selected, then Direct and Indirect will be on a separate circuit.


<sup>3</sup> Direct, Indirect and Spot light will all be on separate circuits. Two power cables will be supplied.

## **TECHNICAL DATA**


#### **LUMINAIRE**

Code	WARP1P18	WARP1P24	WARP2P18	WARP2P24
Diameter (A)	18"	24"	18"	24"
Light Direction	Direct	Direct	Direct/Indirect	Direct/Indirect
Wattage	22W	34W	43W	54W
Delivered Ims (Direct)	3300	4900	3300	4900
Delivered Ims (Indirect)			2400	2400
LPW	146	145	131	132
Height (B)	6"	6.5"	6"	6.5"

## **FIXTURE FINISH**

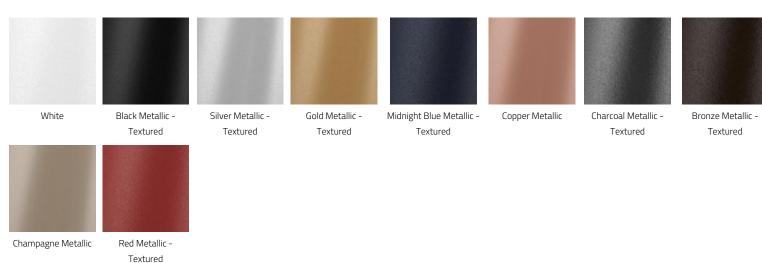

## **CANOPY FINISH**

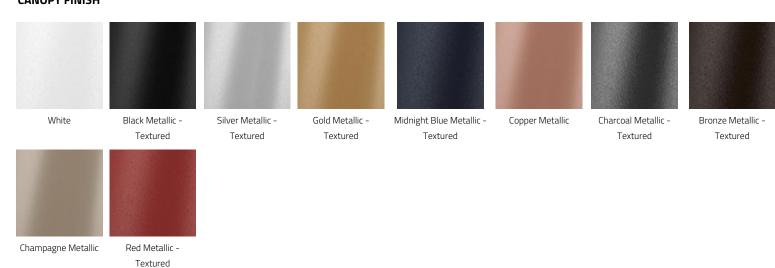

## **APPROVALS**











## **DIMENSIONAL DIAGRAMS**

