


# WRAP PM™ - WALL SURFACE EXTERIOR

Project Name:	Fixture Type:
Fixture Code:	Quantities:

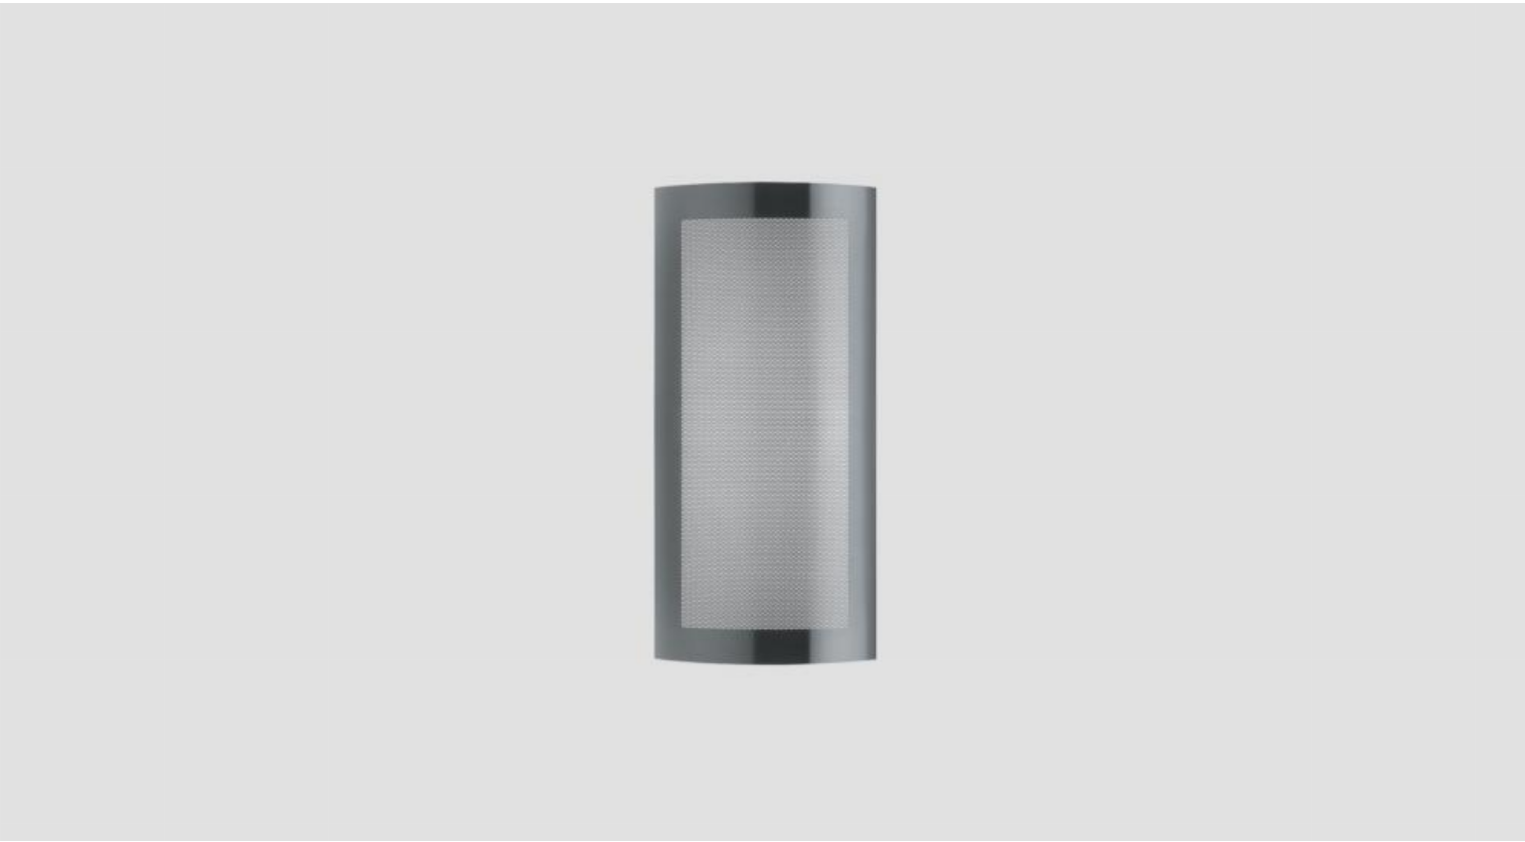

# WRAP PM™ - WALL SURFACE EXTERIOR

## GENERAL SPECIFICATION

### Cover

Stainless steel.

### Finish

Stainless steel only.

### Drivers

HPF, electronic, 120/277V (EU-240V), 0-10V, 10% dimming standard.

### Remote Emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

### Main body

Steel and cast aluminium. Body retained by stainless steel screws.

### Diffuser

Opal acrylic.


### Minimum Starting Temperature

-25 °C.

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

## OPTICS & FEATURES



Ext-Wall Front/Back



General Diffuse

# WRAP PM™ - WALL SURFACE EXTERIOR

## HOW TO ORDER

### A. LUMINAIRE

<b>312143</b> 17" Height, 16W, 278 lms	<b>312201</b> 26" Height, 16W, 757 lms	<b>312203</b> 26" Height, 28W, 1316 lms	<b>312205</b> 50" Height, 28W, 1286 lms
<b>312207</b> 50" Height, 56W, 2527 lms			

### B. CCT

<b>30</b> 3000K (min 80 CRI)	<b>35</b> 3500K (min 80 CRI)	<b>40</b> 4000K (min 80 CRI)
------------------------------	------------------------------	------------------------------

### C. OPTIONS

**RE** Remote Emergency System (max distance 25ft, 120/277V)

Dimming is not available when using RE (Remote Emergency)

## TECHNICAL DATA

### LUMINAIRE

Code	312143	312201	312203	312205	312207
Power (LED)	16W	16W	28W	28W	56W
Delivered lms	278	757	1316	1286	2527
LPW	18	49	48	47	46
Height (A)	17"	26"	26"	50"	50"
Width (B)	11"	12"	12"	12"	12"

## APPROVALS



# WRAP PM™ - WALL SURFACE EXTERIOR

## DIMENSIONAL DIAGRAMS

