WRAP PM™ - WALL SURFACE EXTERIOR

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WRAP PM™ - WALL SURFACE EXTERIOR

GENERAL SPECIFICATION

Cover
Stainless steel.

Finish
Stainless steel only.

Drivers
HPF, electronic, 120/277V (EU-240V), 0-10V, 10% dimming standard.

Remote Emergency
Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).


Main body
Steel and cast aluminium. Body retained by stainless steel screws.

Lens
Opal acrylic.

Minimum Starting Temperature
-25°C.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

OPTICS & FEATURES


Ext-Wall Front/Back


General Diffuse

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WRAP PM™ - WALL SURFACE EXTERIOR

HOW TO ORDER

A. LUMINAIRE

312143 17" Height, 16W, 278 lms
312201 26" Height, 16W, 757 lms
312203 26" Height, 28W, 1316 lms
312205 50" Height, 28W, 1286 lms
312207 50" Height, 56W, 2527 lms

B. CCT

30 3000K (min 80 CRI)
35 3500K (min 80 CRI)
40 4000K (min 80 CRI)

C. OPTIONS

RE Remote Emergency System (max distance 25ft, 120/277V)

Dimming is not available when using RE (Remote Emergency)

TECHNICAL DATA

LUMINAIRE


Code	312143	312201	312203	312205	312207
Power (LED)	16W	16W	28W	28W	56W
Delivered lms	278	757	1316	1286	2527
LPW	18	49	48	47	46
Height (A)	17"	26"	26"	50"	50"
Width (B)	11"	12"	12"	12"	12"

APPROVALS

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WRAP PM™ - WALL SURFACE EXTERIOR

DIMENSIONAL DIAGRAMS

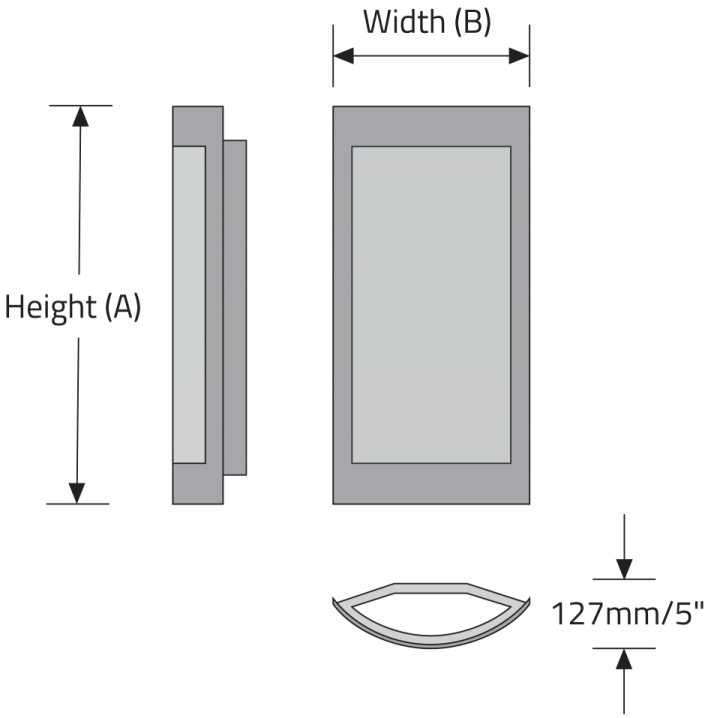

© 2026 Beta-Calco Inc. Specifications are subject to change without notice