
WRAP PS™ - WALL SURFACE EXTERIOR

Project Name:

Fixture Type:

Fixture Code:

Quantities:

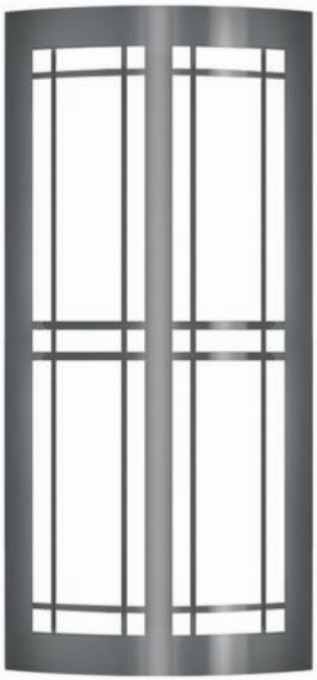

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WRAP PS™ - WALL SURFACE EXTERIOR

GENERAL SPECIFICATION

Cover
Stainless steel.

Finish
Various as listed.

Drivers
HPF, electronic, 120/277V (EU-240V), 0-10V, 10% dimming standard.

Remote Emergency
Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).


Main body
Steel and cast aluminium. Body retained by stainless steel screws.

Lens
Opal acrylic.

Minimum Starting Temperature
-25°C.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

OPTICS & FEATURES



Ext-Wall Front/Back

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WRAP PS™ - WALL SURFACE EXTERIOR

HOW TO ORDER

A. LUMINAIRE

312163 312163
312211 312211
312213 312213
312215 312215
312217 312217

B. CCT

30 3000K (min 80 CRI)
35 3500K (min 80 CRI)
40 4000K (min 80 CRI)

C. FINISH

BL Black
MB Metallic Bronze
MS Silver Metallic
SS Stainless Steel

OT & BL1 have a one time set-up charge regardless of quantity.

D. OPTIONS

RE Remote Emergency System (max distance 25ft, 120/277V)

Dimming is not available when using RE (Remote Emergency)

TECHNICAL DATA

LUMINAIRE


Code	312163	312211	312213	312215	312217
Power (LED)	16W	16W	28W	28W	56W
Delivered lms	504	1074	1872	1782	3508
LPW	32	70	69	65	64
Height (A)	17"	26"	26"	50"	50"
Width (B)	11"	12"	12"	12"	12"

APPROVALS

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

WRAP PS™ - WALL SURFACE EXTERIOR

DIMENSIONAL DIAGRAMS

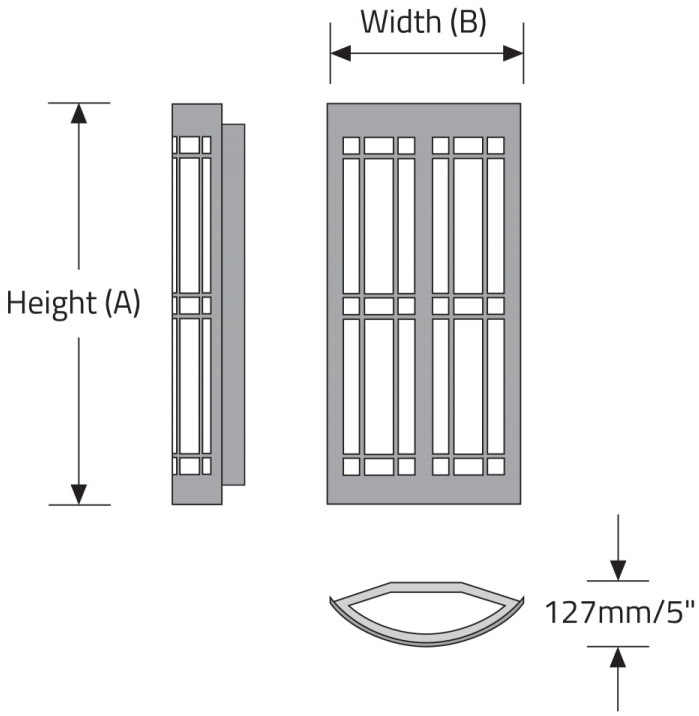

© 2026 Beta-Calco Inc. Specifications are subject to change without notice