


# WRAP SL™ - MODERN CLASSICS EXTERIOR

Project Name:	Fixture Type:
Fixture Code:	Quantities:



WRAP SL™ - MODERN CLASSICS EXTERIOR

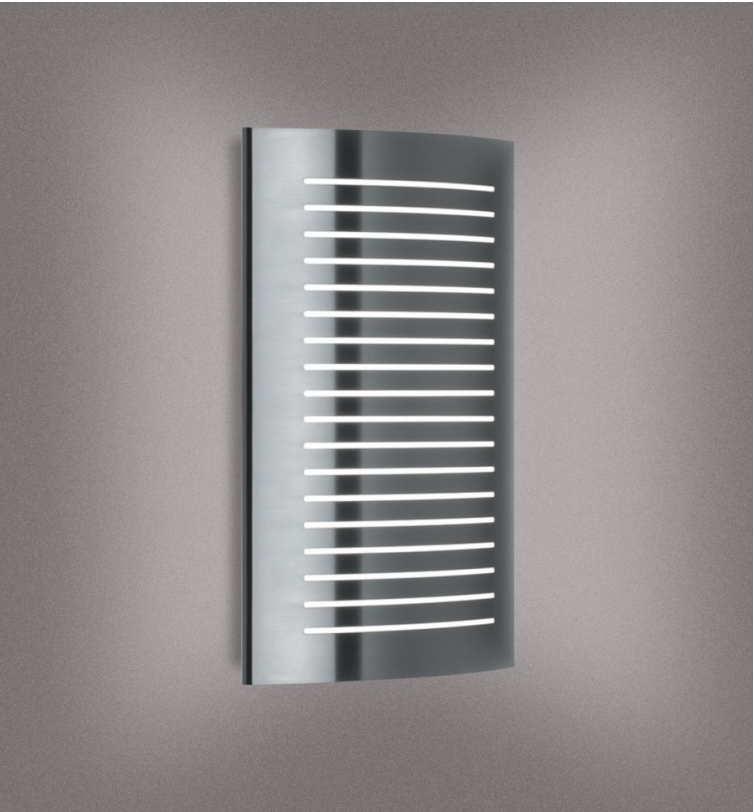

# WRAP SL™ - MODERN CLASSICS EXTERIOR

A facade light with a curved stainless steel grill adds an accent ideal for modern architecture. The grill subdues the light from the front angle and functions as a decorative accent, while light emits from all lateral sides of the luminaire, providing general illumination for the immediate area. Alternative finishes include Black, Bronze Metallic, and Silver Metallic.

## GENERAL SPECIFICATION

### Cover

Stainless steel.

### Finish

Various as listed.

### Remote Emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

### Main body

Steel and cast aluminium. Body retained by stainless steel screws.

### Diffuser

Opal acrylic.


### Drivers

HPF, electronic, 120/277V (EU-240V), 0-10V, equal to or less than 10% dimming standard.

### Minimum Starting Temperature

-25°C.

## OPTICS & FEATURES



Ext-Wall Front/Back

General Diffuse

# WRAP SL™ - MODERN CLASSICS EXTERIOR

## HOW TO ORDER

### A. LUMINAIRE

<b>312153</b> 17" Height, 16W, 243 lms	<b>312221</b> 26" Height, 16W, 731 lms	<b>312223</b> 26" Height, 28W, 1274 lms	<b>312225</b> 50" Height, 28W, 1064 lms
<b>312227</b> 50" Height, 56W, 2110 lms			

### B. CCT

<b>30</b> 3000K (min 80 CRI)	<b>35</b> 3500K (min 80 CRI)	<b>40</b> 4000K (min 80 CRI)
------------------------------	------------------------------	------------------------------

### C. FINISH

<b>BL</b> Black Metallic Textured	<b>MS</b> Silver Metallic Textured	<b>BM</b> Bronze Metallic Textured	<b>SS</b> Stainless Steel
-----------------------------------	------------------------------------	------------------------------------	---------------------------

### D. OPTIONS

**RE** Remote Emergency System (max distance 25ft, 120/277V)


Dimming is not available when using RE (Remote Emergency)

## TECHNICAL DATA

### LUMINAIRE

Code	312153	312221	312223	312225	312227
Power (LED)	16W	16W	28W	28W	56W
Delivered lms	243	731	1274	1064	2110
LPW	16	48	47	39	39
Height (A)	17"	26"	26"	50"	50"
Width (B)	11"	12"	12"	12"	12"

### FINISH

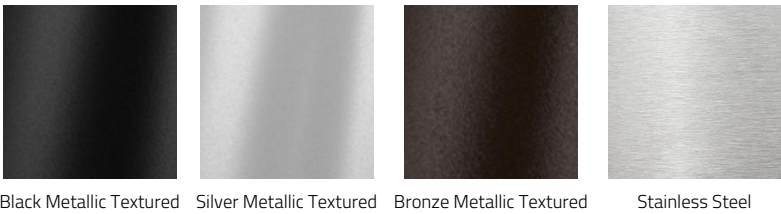

## APPROVALS



# WRAP SL™ - MODERN CLASSICS EXTERIOR

## DIMENSIONAL DIAGRAMS

