# WRAP SL™ - MODERN CLASSICS EXTERIOR

**Project Name:**

**Fixture Type:**

**Fixture Code:**

**Quantities:**






© 2026 Beta-Calco Inc. Specifications are subject to change without notice

# WRAP SL™ - MODERN CLASSICS EXTERIOR







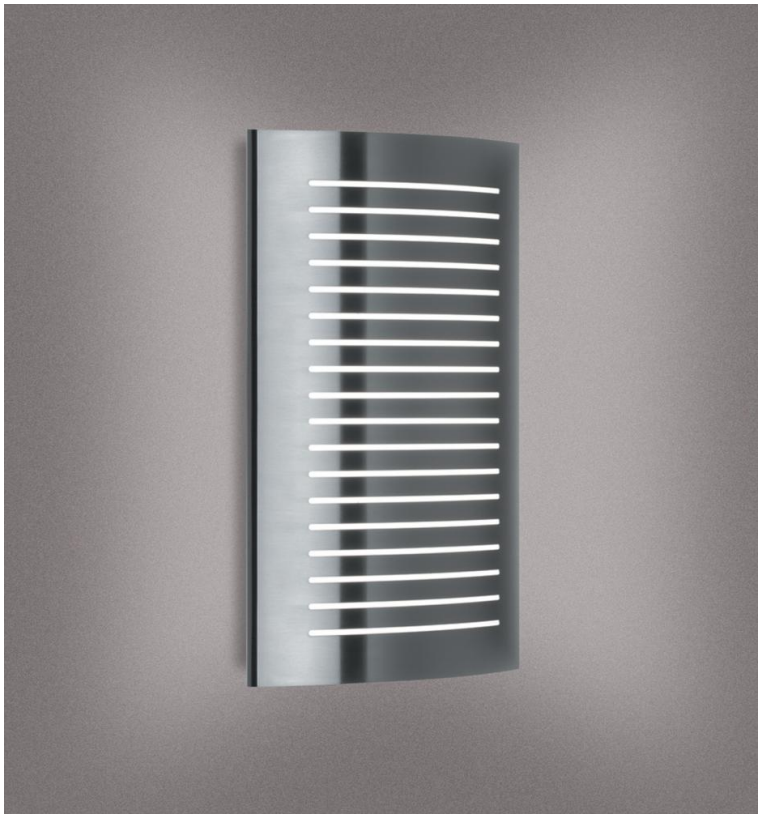


© 2026 Beta-Calco Inc. Specifications are subject to change without notice

# WRAP SL™ - MODERN CLASSICS EXTERIOR

A facade light with a curved stainless steel grill adds an accent ideal for modern architecture. The grill subdues the light from the front angle and functions as a decorative accent, while light emits from all lateral sides of the luminaire, providing general illumination for the immediate area. Alternative finishes include Black, Bronze Metallic, and Silver Metallic.

## GENERAL SPECIFICATION

**Cover**
Stainless steel.

**Main body**
Steel and cast aluminium. Body retained by stainless steel screws.

**Finish**
Various as listed.

**Lens**
Opal acrylic.


**Remote Emergency**
Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

**Drivers**
HPF, electronic, 120/277V (EU-240V), 0-10V, equal to or less than 10% dimming standard.

**Delivered Lumens**
Delivered lumens & LPW based on 3000K (min 80 CRI).

**Minimum Starting Temperature**
-25°C.

## OPTICS & FEATURES


Ext-Wall Front/Back


General Diffuse


© 2026 Beta-Calco Inc. Specifications are subject to change without notice

# WRAP SL™ - MODERN CLASSICS EXTERIOR

## HOW TO ORDER

### A. LUMINAIRE

**312153** 17" Height, 16W, 243 lms
**312221** 26" Height, 16W, 731 lms
**312223** 26" Height, 28W, 1274 lms
**312225** 50" Height, 28W, 1064 lms
**312227** 50" Height, 56W, 2110 lms

### B. CCT

**30** 3000K (min 80 CRI)
**35** 3500K (min 80 CRI)
**40** 4000K (min 80 CRI)

### C. FINISH

**BL** Black Metallic Textured
**MS** Silver Metallic Textured
**BM** Bronze Metallic Textured
**SS** Stainless Steel

### D. OPTIONS

**RE** Remote Emergency System (max distance 25ft, 120/277V)

Dimming is not available when using RE (Remote Emergency)

## TECHNICAL DATA

### LUMINAIRE

| Code | 312153 | 312221 | 312223 | 312225 | 312227 |
|---|---|---|---|---|---|
| **Power (LED)** | 16W | 16W | 28W | 28W | 56W |
| **Delivered lms** | 243 | 731 | 1274 | 1064 | 2110 |
| **LPW** | 16 | 48 | 47 | 39 | 39 |
| **Height (A)** | 17" | 26" | 26" | 50" | 50" |
| **Width (B)** | 11" | 12" | 12" | 12" | 12" |

## FINISH


Black Metallic Textured


Silver Metallic Textured


Bronze Metallic Textured



Stainless Steel

## APPROVALS


© 2026 Beta-Calco Inc. Specifications are subject to change without notice

# WRAP SL™ - MODERN CLASSICS EXTERIOR

**DIMENSIONAL DIAGRAMS**

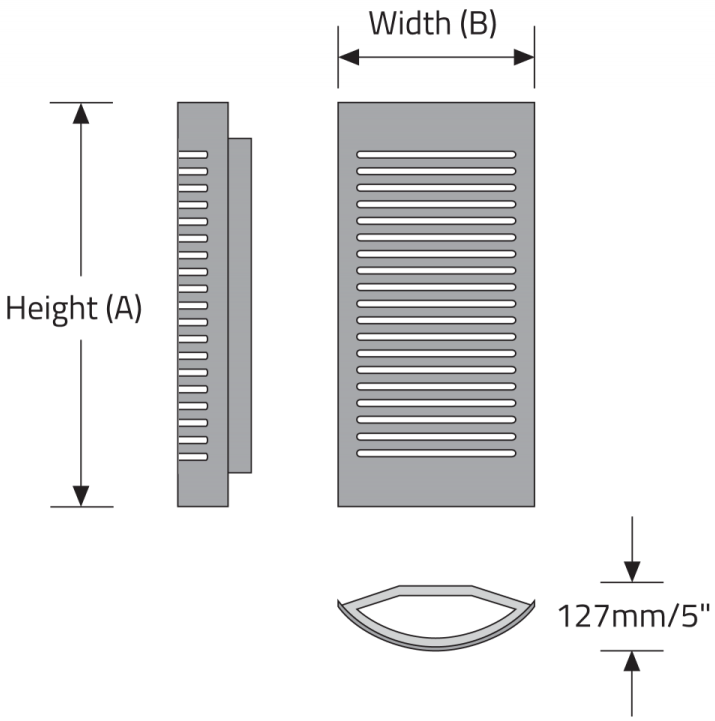



© 2026 Beta-Calco Inc. Specifications are subject to change without notice