XACARA CL™ - CEILING SURFACE

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA CL™ - CEILING SURFACE

GENERAL SPECIFICATION

Body
Die cast aluminum.

Finish
Powder coated.

Reflectors
Aluminum, specular finish with multiple facets.

Mounting
Mounts directly to a junction box (by others).

Protective lens
Clear glass.

Driver
HPF electronic, 120/277V (EU-240V) with 0-10V dimming (1%).

L70 @25°C (77°F)
> 50,000 hrs.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).


Approvals
Damp Location (Indoor use only).

Note

Photometric testing performed using LM79 procedures.

OPTICS & FEATURES


Surface


36°


70°

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA CL™ - CEILING SURFACE

HOW TO ORDER

A. LUMINAIRE

501020 1 x 15W, 1143 lms
501022 1 x 26W, 2085 lms

B. CCT/CRI

30A 3000K (min 80 CRI)
30B 3000K (min 90 CRI)
35A 3500K (min 80 CRI)
35B 3500K (min 90 CRI)
40A 4000K (min 80 CRI)
40B 4000K (min 90 CRI)

C. REFLECTOR

ME Medium 36°
XW Extra wide 70°

D. FINISH

BL Black
MS Silver Metallic
WH White

E. OPTIONS

D2 0-10V Dimming (0.1%)
DL DALI dimming 1%
DA DALI dimming 0.1%
L1 Lutron L3DA3W Hi lume 1%
L3 Lutron L3DAE Hi lume 1% EcoSystem

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA CL™ - CEILING SURFACE

TECHNICAL DATA

LUMINAIRE

Code	501020	501022
Power (LED)	1 x 15W	1 x 26W
Delivered lms	1143	2085
LPW	76	80


APPROVALS



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA CL™ - CEILING SURFACE

DIMENSIONAL DIAGRAMS

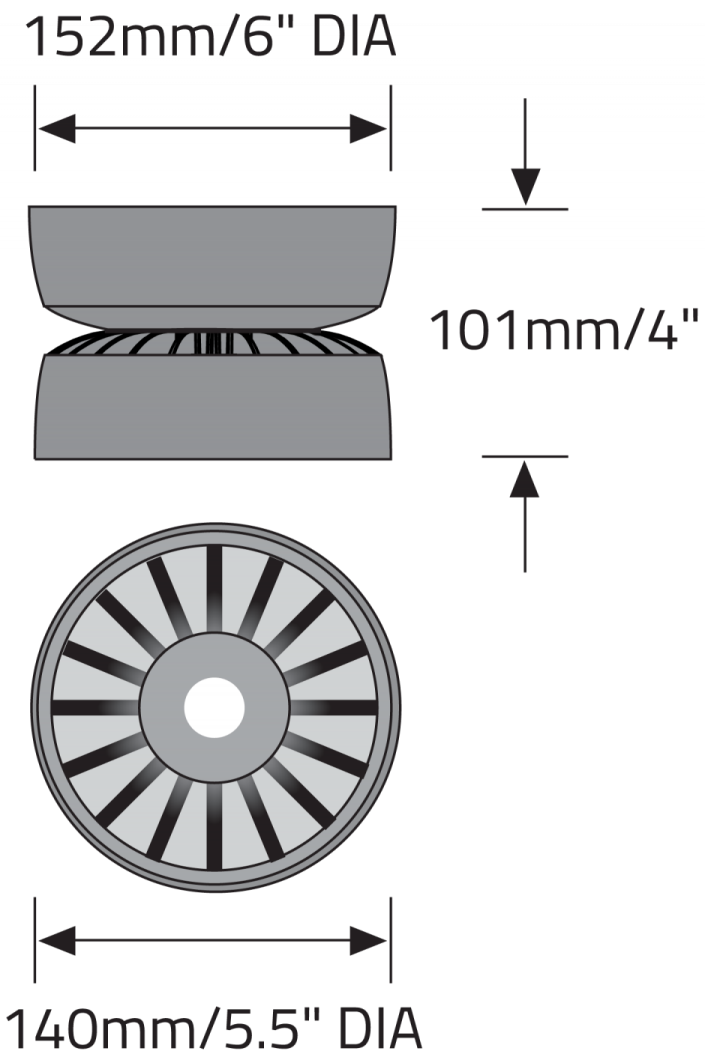

© 2026 Beta-Calco Inc. Specifications are subject to change without notice