XACARA L REFLEKTOR™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA L REFLEKTOR™ - SUSPENDED



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA L REFLEKTOR™ - SUSPENDED

GENERAL SPECIFICATION

Body
Die cast aluminium and steel.

Finish
White powder coated.

Suspension
Two polished chrome plated tubes or stainless steel cables.

Power cable
Silver braided.

Reflectors
Aluminium, specular finish with vertical facets.

LED protection
Clear lense.

Drivers
HPF electronic 120-277V (EU-240V), 0-10V, 10% dimming.

Dust cover
Clear polycarbonate.

Emergency systems

Integral
Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Integral emergency luminaires have a 50mm/2" extended ballast housing. Not available with a 347V supply.

Remote
Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

Mechanical
Luminaires mount directly over a junction box (not supplied).


Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

Approvals
Damp Location (Indoor use only).

Note

Photometric testing performed using LM79 procedures.

OPTICS & FEATURES



Suspended Direct/Indirect

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA L REFLEKTOR™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

502520 502520

B. CCT/CRI

30A 3000K (min 80 CRI)
30B 3000K (min 90 CRI)
35A 3500K (min 80 CRI)
35B 3500K (min 90 CRI)
40A 4000K (min 80 CRI)
40B 4000K (min 90 CRI)

C. SUSPENSION

TS Tube Suspension
CS Cable Suspension

D. OPTIONS

DA DALI Dimming - 10% (not available with 347V)
RE Remote Emergency (not available with DALI or 347V)
3 347V (not available with DALI or RE)
SS Separate Switching (in combination with UM, 0-10V dimming only)
UH Uplight Hole (6" dia hole in main reflector provides upwards illumination)
UM Uplight Module (1x28W Xacara, LED array same as specified in main housing)

TECHNICAL DATA

LUMINAIRE


Code	**502520**
Power (LED)	120W
Delivered lms	9187
LPW	77


APPROVALS

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA L REFLEKTOR™ - SUSPENDED

DIMENSIONAL DIAGRAMS

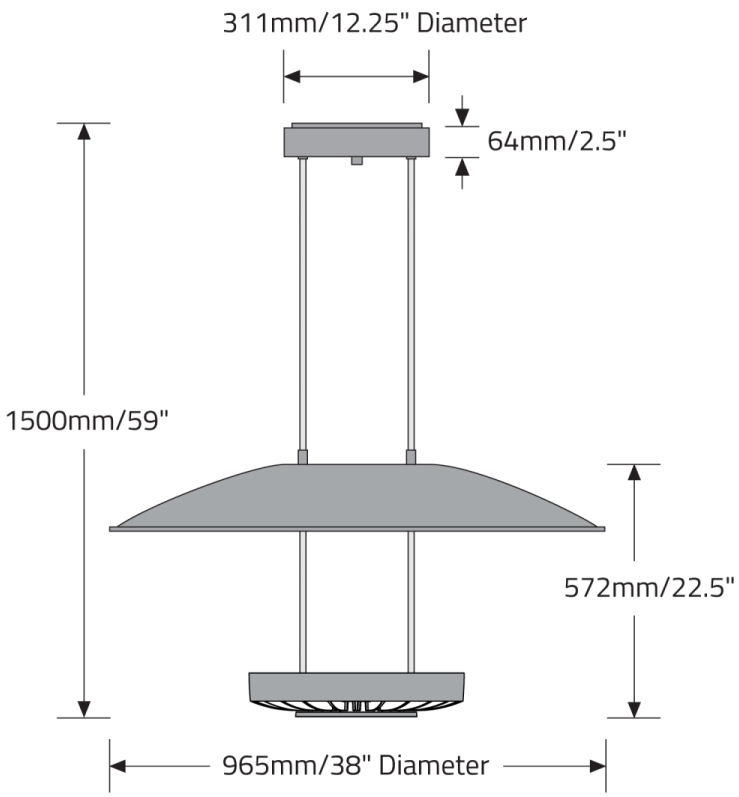

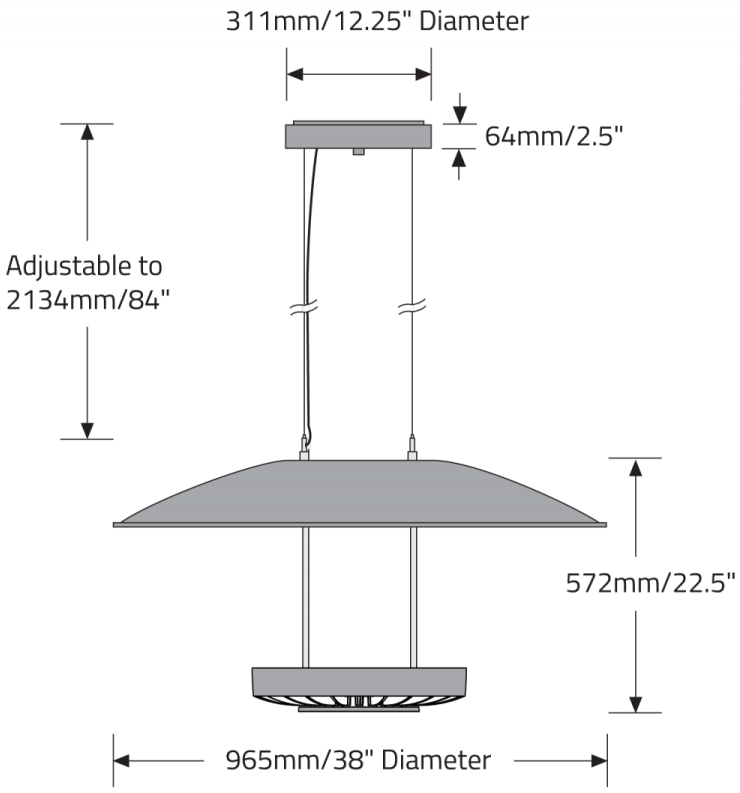

© 2026 Beta-Calco Inc. Specifications are subject to change without notice