

XACARA L™ - SUSPENDED - DIRECT

Project Name:



Fixture Type:

Fixture Code:

Quantities:



XACARA L™ - SUSPENDED - DIRECT

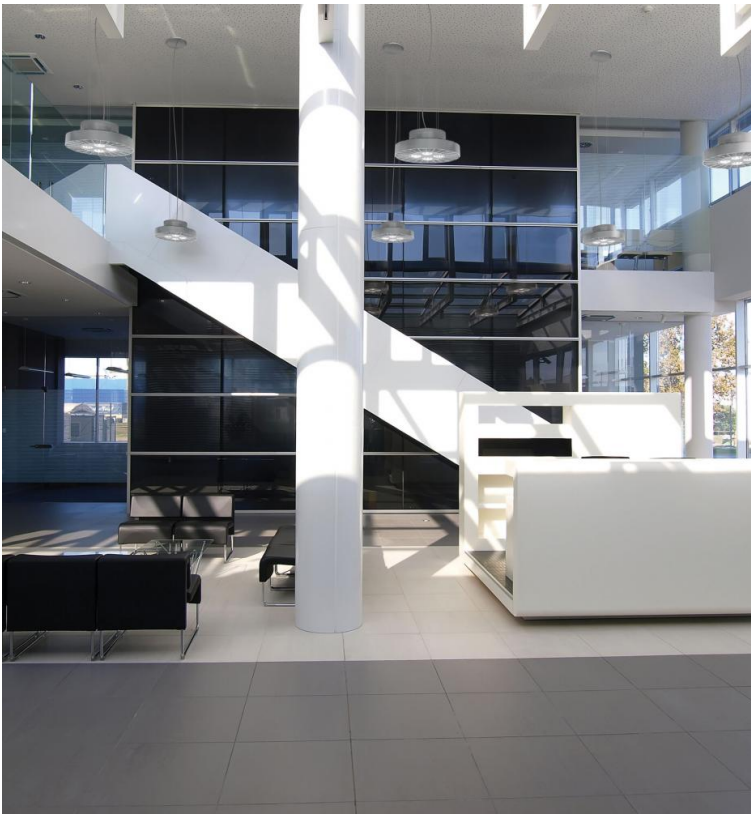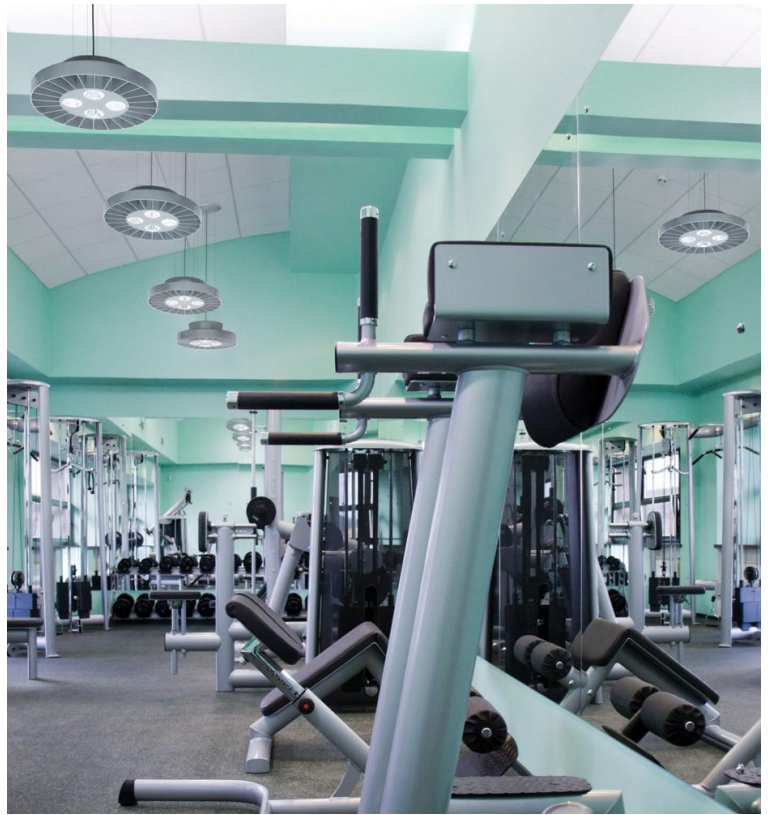

XACARA L™ - SUSPENDED - DIRECT

The raw design delivers primal functionality in light performance and to interior aesthetics. Choose between 4, 5, and 6 LED modules to optimize light levels according to the application. **XACARA** packs light outputs suitable for industrial settings, warehouses, and superstores.

GENERAL SPECIFICATION

Body

Die cast aluminum and steel.

Suspension

Three or four stainless steel aircraft cables.

Drivers

120/277V (EU-240V) electronic with 0-10V dimming (10%). The driver is integral to the fixture housing.

Reflectors

Aluminum, specular finish with vertical facets.

Integral

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Integral emergency luminaires have a 50mm/2" extended ballast housing. Not available with a 347V supply.

Reported L70 @25 °C (77 °F)

> 60,000 hrs.

Note

Photometric testing performed using LM79 procedures.

Finish

Powder coated.

Power cable

Silver braided.

Decorative disc (optional)

6mm/0.25" green tint acrylic (faux glass) with a polished edge and a etched face.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

Remote

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

Approvals

Damp Rated.

Sensors

Consult factory regarding sensor compatibility.

MOUNTING & OPTICS



Suspended Direct

Direct

Declare

XACARA L™ - SUSPENDED - DIRECT

HOW TO ORDER

A. LUMINAIRE

506705 140W (4 LEDs), 13631 lms

506710 175W (5 LEDs), 17009 lms

506715 210W (6 LEDs), 20362 lms

B. CCT/CRI

30A 3000K (min 80 CRI)

30B 3000K (min 90 CRI)

35A 3500K (min 80 CRI)

35B 3500K (min 90 CRI)

40A 4000K (min 80 CRI)

40B 4000K (min 90 CRI)

C. FINISH

WH White

AP27 Black

MS Silver Metallic Textured

D. DIMMING OPTIONS

DA DALI Dimming (10%) (not available with Emergency or 347V)

DX DMX Drivers (supplied with 2 power cords) (not available with Emergency or 347V)

E. EMERGENCY OPTIONS

EM Integral Emergency (not available with DALI, DMX, CM or 347V)

RE Remote Emergency (not available with DALI, DMX or 347V)

F. OPTIONS

BT Bezel Trim (711mm/28" DIA)

DD Decorative Disc (acrylic)

CM Ceiling Mount (not available with EM (Integral Emergency)

3 347V (not available with DALI, DMX or Emergency Options)



XACARA L™ - SUSPENDED - DIRECT

TECHNICAL DATA


LUMINAIRE

Code	506705	506710	506715
Power	140W (4 LEDs)	175W (5 LEDs)	210W (6 LEDs)
Delivered lms	13631	17009	20362
LPW	103	103	103
Weight	29lb	29lb	29lb

FINISH



White



Black



Silver Metallic Textured

APPROVALS



DAMP
LOCATION



IP20



XACARA L™ - SUSPENDED - DIRECT

DIMENSIONAL DIAGRAMS

