



# XACARA L™ - SUSPENDED - DIRECT

Project Name:	Fixture Type:
Fixture Code:	Quantities:

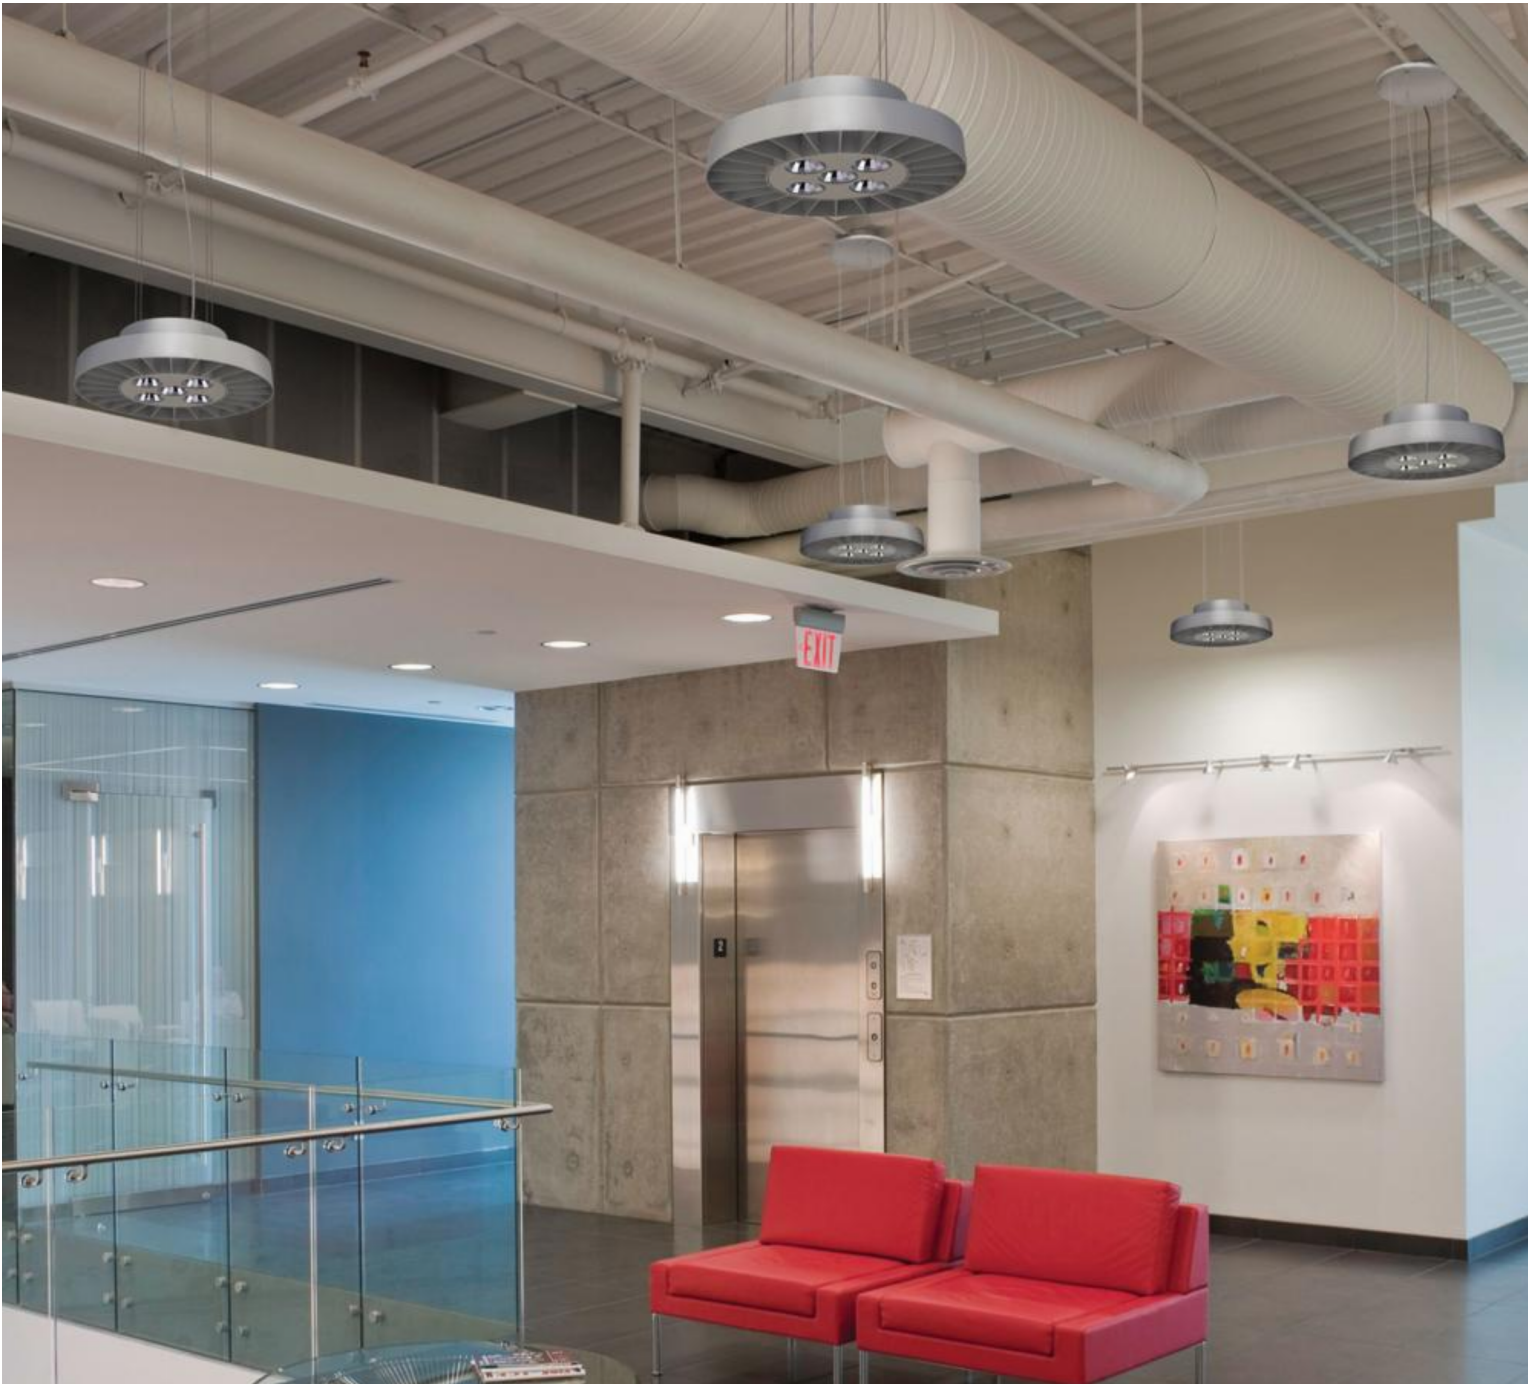

## XACARA L™ - SUSPENDED - DIRECT

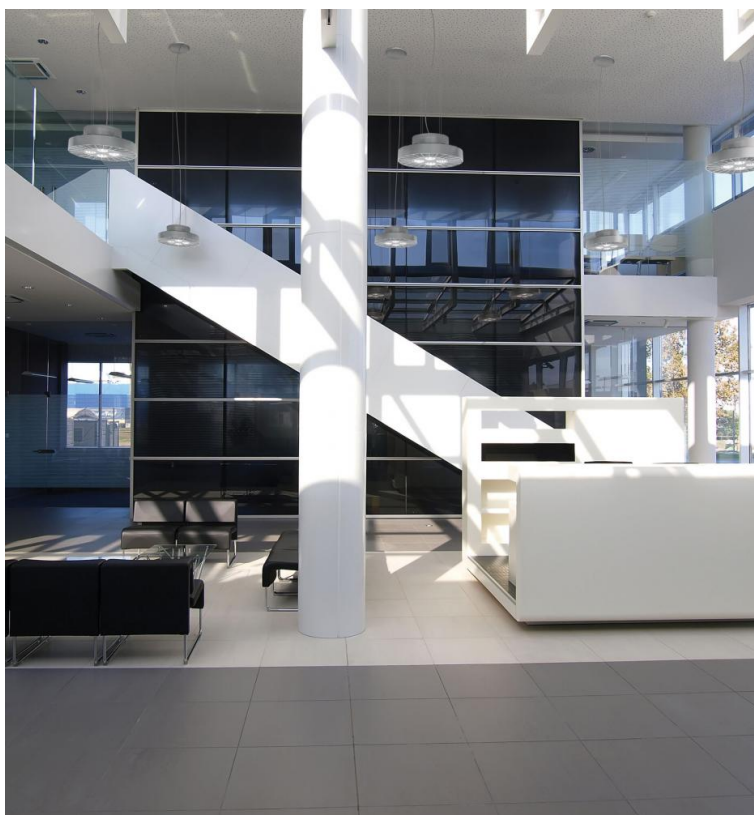

# XACARA L™ - SUSPENDED - DIRECT

The raw design delivers primal functionality in light performance and to interior aesthetics. Choose between 4, 5, and 6 LED modules to optimize light levels according to the application. **XACARA** packs light outputs suitable for industrial settings, warehouses, and superstores.

## GENERAL SPECIFICATION

### Body

Die cast aluminum and steel.

### Suspension

Three or four stainless steel aircraft cables.

### Drivers

120/277V (EU-240V) electronic with 0-10V dimming (10%). The driver is integral to the fixture housing.

### Reflectors

Aluminum, specular finish with vertical facets.

### Integral

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Integral emergency luminaires have a 50mm/2" extended ballast housing. Not available with a 347V supply.

### Reported L70 @25°C (77°F)

> 60,000 hrs.

### Note

Photometric testing performed using LM79 procedures.

### Finish

Powder coated.

### Power cable

Silver braided.

### Decorative disc (optional)

6mm/0.25" green tint acrylic (faux glass) with a polished edge and a etched face.

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

### Remote

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).


### Approvals

Damp Rated.

### Sensors

Consult factory regarding sensor compatibility.

## OPTICS & FEATURES

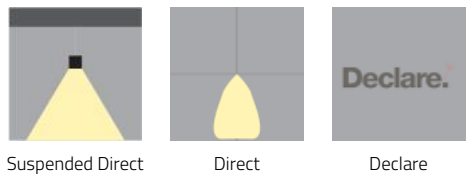

# XACARA L™ - SUSPENDED - DIRECT

## HOW TO ORDER

### A. LUMINAIRE

**506705** 140W (4 LEDs), 13631 lms      **506710** 175W (5 LEDs), 17009 lms      **506715** 210W (6 LEDs), 20362 lms

### B. CCT/CRI

**30A** 3000K (min 80 CRI)      **30B** 3000K (min 90 CRI)      **35A** 3500K (min 80 CRI)      **35B** 3500K (min 90 CRI)  
**40A** 4000K (min 80 CRI)      **40B** 4000K (min 90 CRI)

### C. FINISH

**WH** White      **BL** Black      **MS** Silver Metallic Textured

### D. DIMMING OPTIONS

**DA** DALI Dimming (10%) (not available with Emergency or 347V)      **DX** DMX Drivers (supplied with 2 power cords) (not available with Emergency or 347V)

### E. EMERGENCY OPTIONS

**EM** Integral Emergency (not available with DALI, DMX, CM or 347V)      **RE** Remote Emergency (not available with DALI, DMX or 347V)

### F. OPTIONS

**BT** Bezel Trim (711mm/28" DIA)      **DD** Decorative Disc (acrylic)      **CM** Ceiling Mount (not available with EM (Integral Emergency)      **3** 347V (not available with DALI, DMX or Emergency Options)




# XACARA L™ - SUSPENDED - DIRECT

## TECHNICAL DATA

### LUMINAIRE

Code	506705	506710	506715
Power	140W (4 LEDs)	175W (5 LEDs)	210W (6 LEDs)
Delivered lms	13631	17009	20362
LPW	103	103	103
Weight	29lb	29lb	29lb

### FINISH

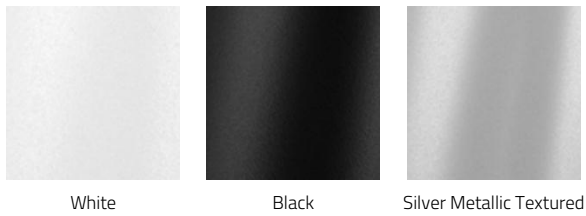

### APPROVALS



XACARA L™ - SUSPENDED - DIRECT

DIMENSIONAL DIAGRAMS

