


# XACARA L™ - SUSPENDED - DIRECT

Project Name:


Fixture Type:

Fixture Code:

Quantities:

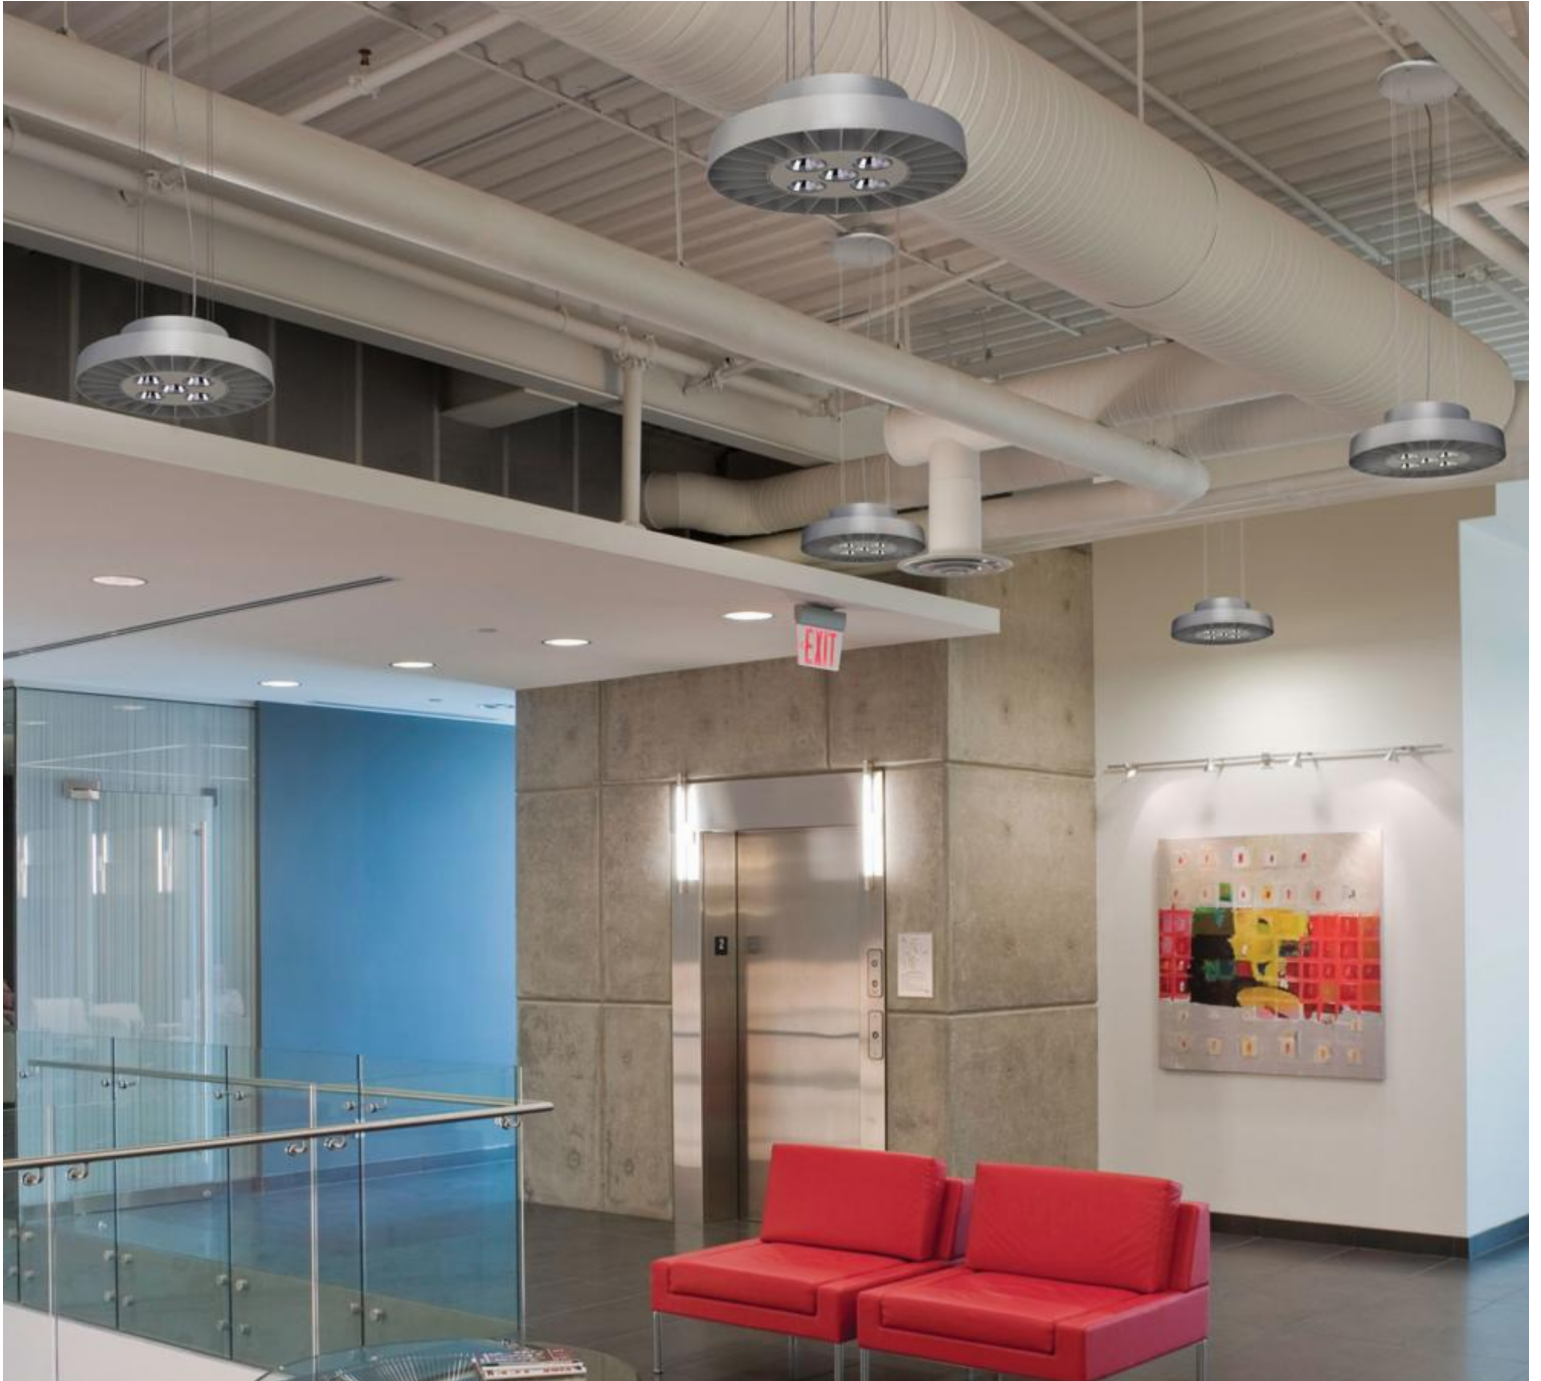

# XACARA L™ - SUSPENDED - DIRECT

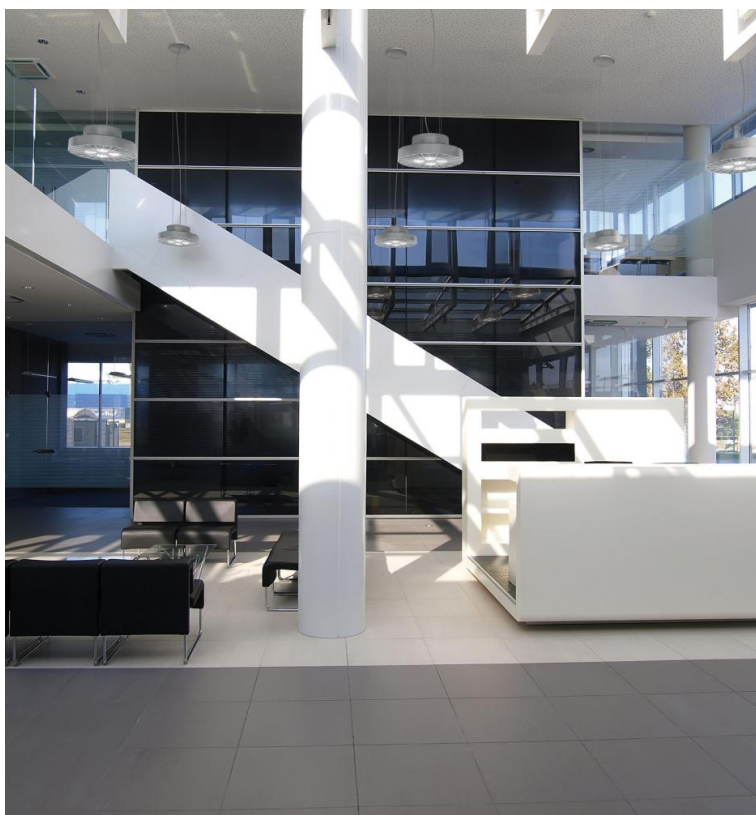

# XACARA L™ - SUSPENDED - DIRECT

The raw design delivers primal functionality in light performance and to interior aesthetics. Choose between 4, 5, and 6 LED modules to optimize light levels according to the application. **XACARA** packs light outputs suitable for industrial settings, warehouses, and superstores.

## GENERAL SPECIFICATION

### Body

Die cast aluminum and steel.

### Suspension

Three or four stainless steel aircraft cables.

### Drivers

120/277V (EU-240V) electronic with 0-10V dimming (10%). The driver is integral to the fixture housing.

### Reflectors

Aluminum, specular finish with vertical facets.

### Integral

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Integral emergency luminaires have a 50mm/2" extended ballast housing. Not available with a 347V supply.

### Reported L70 @25 °C (77 °F)

> 60,000 hrs.

### Note

Photometric testing performed using LM79 procedures.

### Finish

Powder coated.

### Power cable

Silver braided.

### Decorative disc (optional)

6mm/0.25" green tint acrylic (faux glass) with a polished edge and a etched face.

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

### Remote

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

### Approvals

Damp Rated.

### Sensors

Consult factory regarding sensor compatibility.

## MOUNTING & OPTICS



Suspended Direct

Direct

Declare

# XACARA L™ - SUSPENDED - DIRECT

## HOW TO ORDER

### A. LUMINAIRE

**506705** 140W (4 LEDs), 13631 lms

**506710** 175W (5 LEDs), 17009 lms

**506715** 210W (6 LEDs), 20362 lms

### B. CCT/CRI

**30A** 3000K (min 80 CRI)

**30B** 3000K (min 90 CRI)

**35A** 3500K (min 80 CRI)

**35B** 3500K (min 90 CRI)

**40A** 4000K (min 80 CRI)

**40B** 4000K (min 90 CRI)

### C. FINISH

**WH** White

**AP27** Black

**MS** Silver Metallic Textured

### D. DIMMING OPTIONS

**DA** DALI Dimming (10%) (not available with Emergency or 347V)

**DX** DMX Drivers (supplied with 2 power cords) (not available with Emergency or 347V)

### E. EMERGENCY OPTIONS

**EM** Integral Emergency (not available with DALI, DMX, CM or 347V)

**RE** Remote Emergency (not available with DALI, DMX or 347V)

### F. OPTIONS

**BT** Bezel Trim (711mm/28" DIA)

**DD** Decorative Disc (acrylic)

**CM** Ceiling Mount (not available with EM (Integral Emergency)

**3** 347V (not available with DALI, DMX or Emergency Options)



# XACARA L™ - SUSPENDED - DIRECT

## TECHNICAL DATA

### LUMINAIRE


<b>Code</b>	<b>506705</b>	<b>506710</b>	<b>506715</b>
<b>Power</b>	140W (4 LEDs)	175W (5 LEDs)	210W (6 LEDs)
<b>Delivered lms</b>	13631	17009	20362
<b>LPW</b>	103	103	103
<b>Weight</b>	29lb	29lb	29lb

---

### FINISH



White



Black



Silver Metallic Textured

### APPROVALS



DAMP  
LOCATION



IP20



# XACARA L™ - SUSPENDED - DIRECT

## DIMENSIONAL DIAGRAMS

