XACARA RD™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA RD™ - SUSPENDED

GENERAL SPECIFICATION

Body and trim
Steel and aluminium.

Gimbal
Fully articulating on two axes.

Reflectors
Medium and wide beam. Highly reflective, specular finish, vacuum plated.

Power cable
Silver braided.

Drivers
HPF electronic for 120-277V (EU-240V). 0-10V dimming (10%).

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

Note

Photometric testing performed using LM79 procedures.

Array housings
Die cast aluminium.

Suspension
Three cables, fully adjustable.

Protective lens
Clear glass.

Finish
Powder coated, as specified.

L70 @25°C (77°F)
> 60,000 hrs.

Approvals
Damp Location (Indoor use only).

OPTICS & FEATURES


Suspended Direct


36°


70°

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA RD™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

501030 50 1030

501060 50 1060

B. CCT/CRI

30A 3000K (min 80 CRI)

30B 3000K (min 90 CRI)

35A 3500K (min 80 CRI)

35B 3500K (min 90 CRI)

40A 4000K (min 80 CRI)

40B 4000K (min 90 CRI)

C. REFLECTOR

ME Medium 36°

XW Extra Wide 70°

D. FINISH

BL Black

MS Silver Metallic

WH White

TECHNICAL DATA

LUMINAIRE


Code	501030	501060
Power (LED)	3 x 26W	6 x 26W
Delivered lms	3 x 2085	6 x 2085
LPW	80	80


APPROVALS


© 2026 Beta-Calco Inc. Specifications are subject to change without notice


XACARA RD™ - SUSPENDED

DIMENSIONAL DIAGRAMS

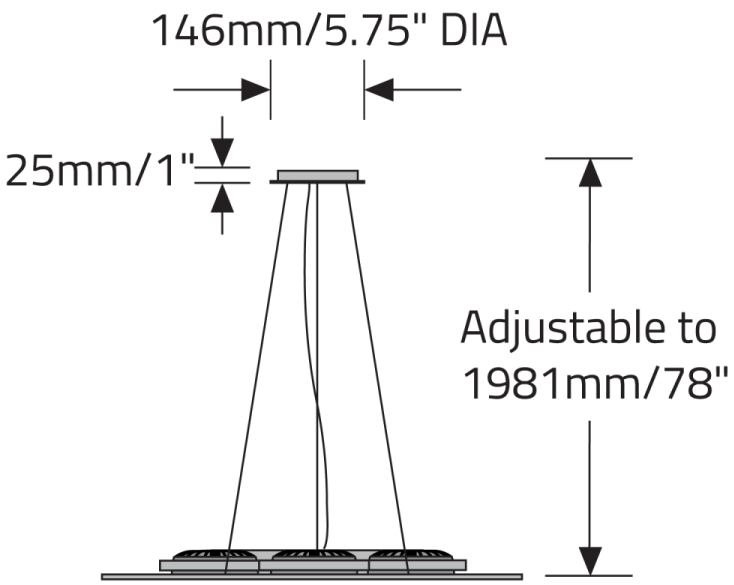

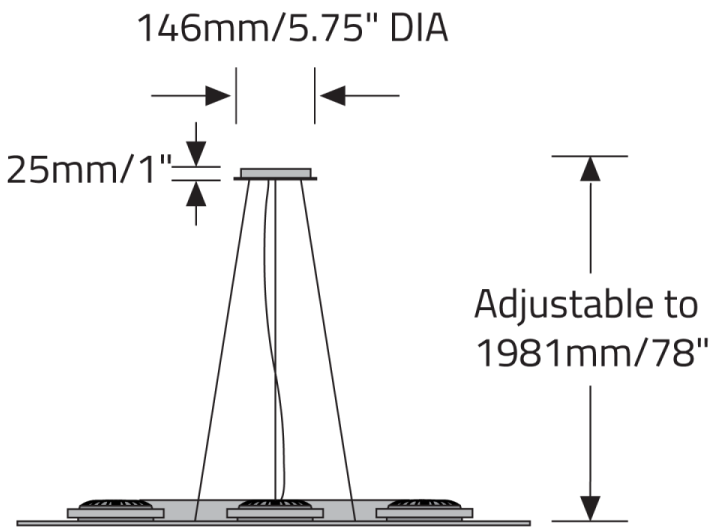

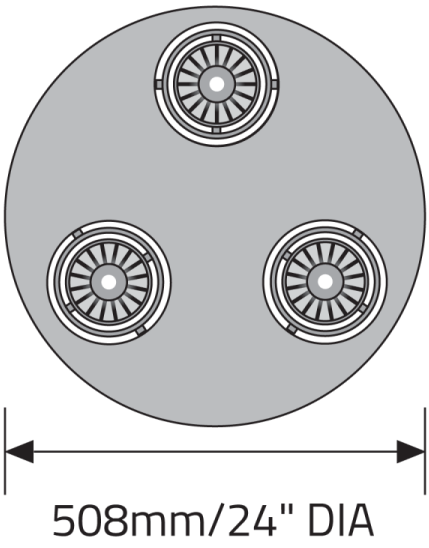

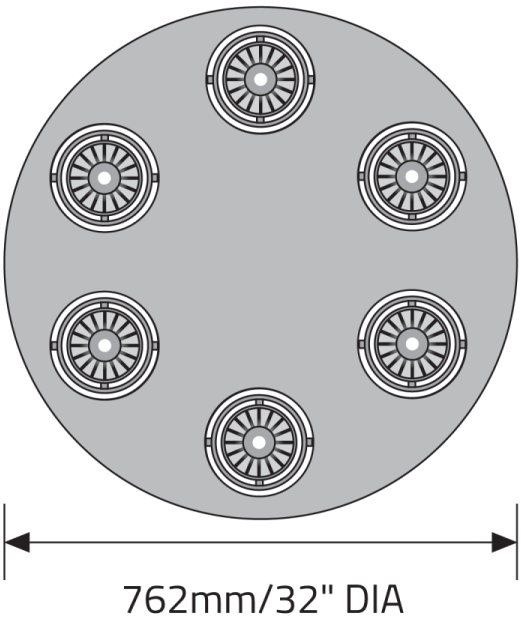

© 2026 Beta-Calco Inc. Specifications are subject to change without notice