

# XACARA S™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:



# XACARA S™ - SUSPENDED

## GENERAL SPECIFICATION

### Body

Die cast aluminum.

### Finish

Powder coated.

### Suspension

Single stainless steel aircraft cable or steel tube.

### Power cable

Clear with silver wires.

### Reflectors

Highly reflective, specular finish, vacuum plated.

### Drivers

HPF electronic, 120/277V (EU-240V).

### L70 @25°C (77°F)

> 60,000 hrs.

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).


### Approvals

Damp Location (Indoor use only).

### Note

*Photometric testing performed using LM79 procedures.*

## MOUNTING & OPTICS

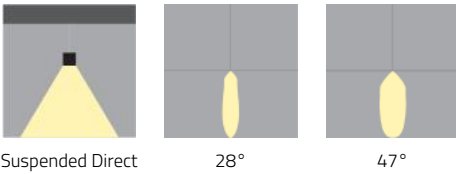

Suspended Direct

28°

47°

# XACARA S™ - SUSPENDED

## HOW TO ORDER

### A. LUMINAIRE

**511100** 38W

### B. CCT/CRI ( BRIDGELUX )

**B430A** 3000K, 80 CRI, 3045 lms

**B430B** 3000K, 90 CRI, 2471 lms

**B435A** 3500K, 80 CRI, 3133 lms

**B435B** 3500K, 90 CRI, 2674 lms

**B440A** 4000K, 80 CRI, 3185 lms

**B440B** 4000K, 90 CRI, 2686 lms

### C. REFLECTOR

**ME** Medium 28°

**WD** Extra wide 47°

### D. FINISH

**BL** Black

**MS** Silver Metallic

**WH** White

### E. SUSPENSION

**CS** Cable Suspension

**TS3** Tube 18"

**TS4** Tube 24"

**TS5** Tube 30"

**TS6** Tube 36"

**TS7** Tube 42"

**TS8** Tube 48"

### F. DIMMING

**D1** 0-10V Dimming (1%)

**D2** 0-10V Dimming (0.1%)

**DL** DALI Dimming (1%)

**DA** DALI Dimming (0.1%)

**L1** Lutron L3DA3W Hi-Lume 1%

**L3** Lutron L3DAE Hi-Lume 1%  
EcoSystem



# XACARA S™ - SUSPENDED

## TECHNICAL DATA

### LUMINAIRE

Code	511100
Power (LED)	38W
LPW	83

### CCT/CRI

Code	B430A	B430B	B435A	B435B	B440A	B440B
CCT	3000K	3000K	3500K	3500K	4000K	4000K
CRI	80	90	80	90	80	90
Delivered lms	3045	2471	3133	2674	3185	2686
LPW	80	65	82	70	83	70

## APPROVALS



DAMP  
LOCATION



IP20



# XACARA S™ - SUSPENDED

## DIMENSIONAL DIAGRAMS

