XACARA S™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA S™ - SUSPENDED

GENERAL SPECIFICATION

Body
Die cast aluminum.

Finish
Powder coated.

Suspension
Single stainless steel aircraft cable or steel tube.

Power cable
Clear with silver wires.

Reflectors
Highly reflective, specular finish, vacuum plated.

Drivers
HPF electronic, 120/277V (EU-240V).

L70 @25°C (77°F)
> 60,000 hrs.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

Approvals
Damp Location (Indoor use only).


Note

Photometric testing performed using LM79 procedures.

OPTICS & FEATURES


Suspended Direct


28°


47°

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA S™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

511100 38W

B. CCT/CRI (BRIDGELUX)

B430A 3000K, 80 CRI, 3045 lms
B430B 3000K, 90 CRI, 2471 lms
B435A 3500K, 80 CRI, 3133 lms
B435B 3500K, 90 CRI, 2674 lms
B440A 4000K, 80 CRI, 3185 lms
B440B 4000K, 90 CRI, 2686 lms

C. REFLECTOR

ME Medium 28°
WD Extra wide 47°

D. FINISH

BL Black
MS Silver Metallic
WH White

E. SUSPENSION

CS Cable Suspension
TS3 Tube 18"
TS4 Tube 24"
TS5 Tube 30"
TS6 Tube 36"
TS7 Tube 42"
TS8 Tube 48"

F. DIMMING

D1 0-10V Dimming (1%)
D2 0-10V Dimming (0.1%)
DL DALI Dimming (1%)
DA DALI Dimming (0.1%)
L1 Lutron L3DA3W Hi-Lume 1%
L3 Lutron L3DAE Hi-Lume 1% EcoSystem

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA S™ - SUSPENDED

TECHNICAL DATA

LUMINAIRE

Code	**511100**
Power (LED)	38W
LPW	83

CCT/CRI

Code	**B430A**	**B430B**	**B435A**	**B435B**	**B440A**	**B440B**
CCT	3000K	3000K	3500K	3500K	4000K	4000K
CRI	80	90	80	90	80	90
Delivered lms	3045	2471	3133	2674	3185	2686
LPW	80	65	82	70	83	70


APPROVALS




© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA S™ - SUSPENDED

DIMENSIONAL DIAGRAMS

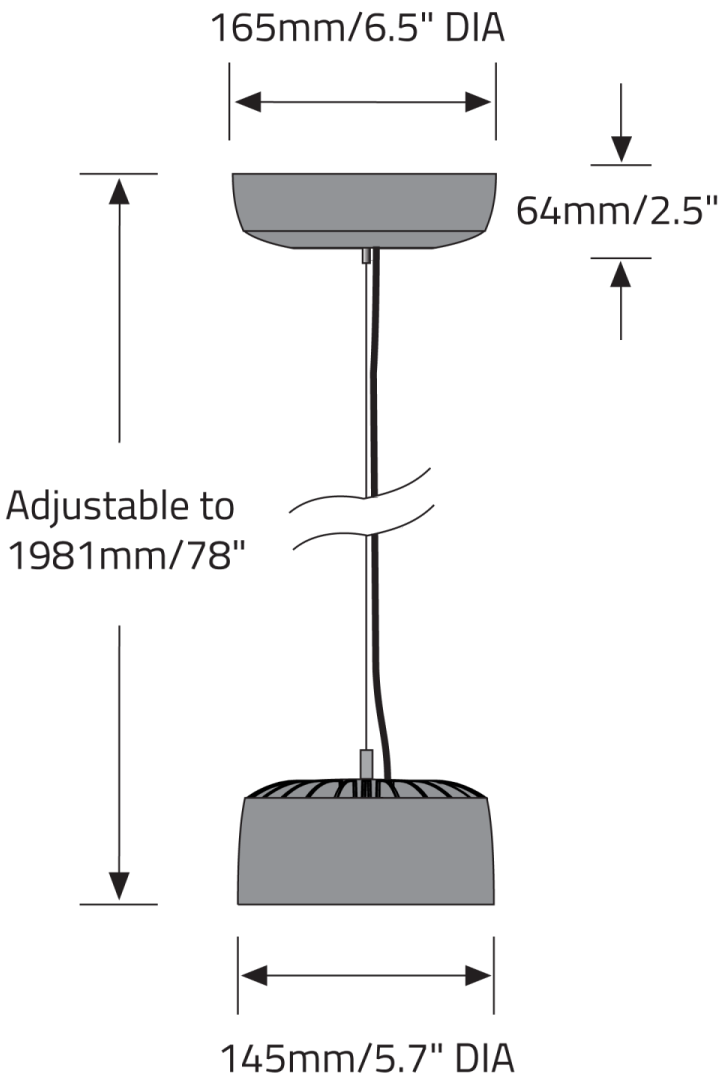

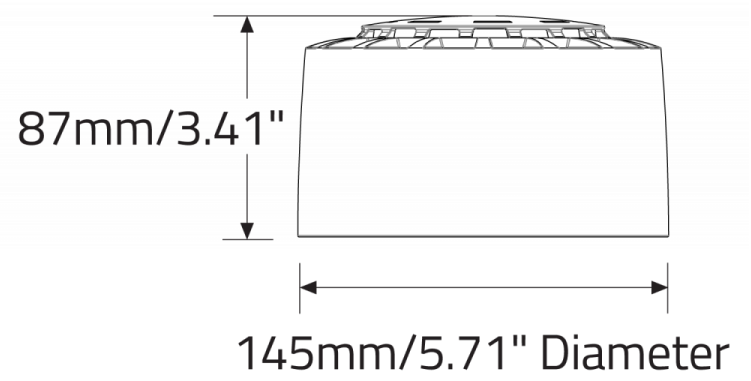

© 2026 Beta-Calco Inc. Specifications are subject to change without notice