XACARA SM™ - WALL SURFACE

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA SM™ - WALL SURFACE

GENERAL SPECIFICATION

Body and trim
Steel and aluminium (extruded).

Array housings
Die cast aluminium.

Gimbal
Fully articulating on two axes.

Reflectors
Medium and wide beam. Highly reflective, specular finish, vacuum plated.

Protective lens
Clear glass.

Mounting
Mounts directly over a 2"x3" switch box (by others).

Orientation
Ceiling or wall. May be inverted.

Visible cable
Silver.


Finish
Powder coated, as specified.

Drivers
HPF electronic for 120-277V (EU-240V). 0-10V dimming.

L70 @25°C (77°F)
> 60,000 hrs.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

OPTICS & FEATURES



Wall

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA SM™ - WALL SURFACE

HOW TO ORDER

A. LUMINAIRE

502210 502210
502215 502215
502220 502220
502230 502230
502240 502240

B. CCT/CRI

30A 3000K (min 80 CRI)
30B 3000K (min 90 CRI)
35A 3500K (min 80 CRI)
35B 3500K (min 90 CRI)
40A 4000K (min 80 CRI)
40B 4000K (min 90 CRI)

C. REFLECTORS

ME Medium 36°
XW Extra wide 70°

D. FINISH

BL Black
MS Silver Metallic
WH White

TECHNICAL DATA

LUMINAIRE

Code	502210	502215	502220	502230	502240
Power (LED)	1 x 26W	1 x 26W	2 x 26W	3 x 26W	4 x 26W
Delivered lms	1 x 2085	1 x 2085	2 x 2085	3 x 2085	4 x 2085
LPW	80	80	80	80	80


APPROVALS





© 2026 Beta-Calco Inc. Specifications are subject to change without notice


XACARA SM™ - WALL SURFACE


DIMENSIONAL DIAGRAMS

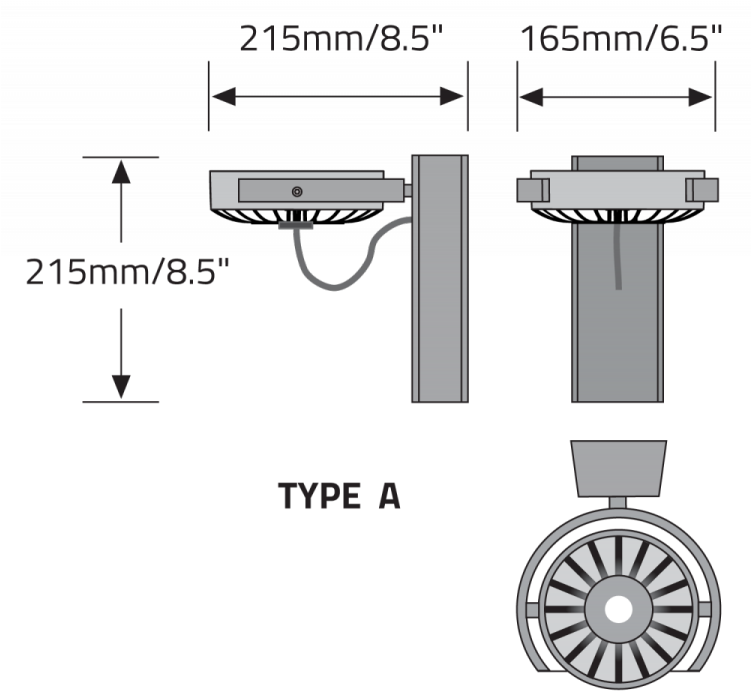


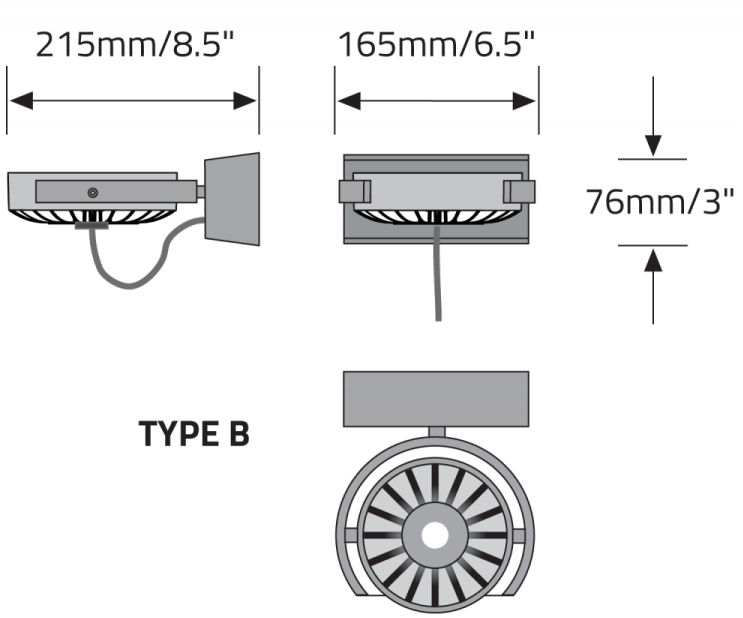

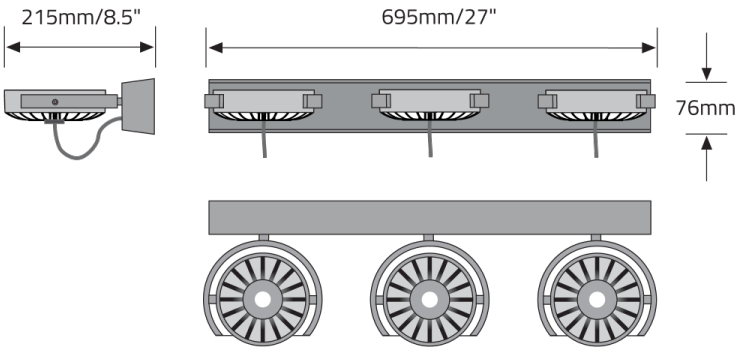

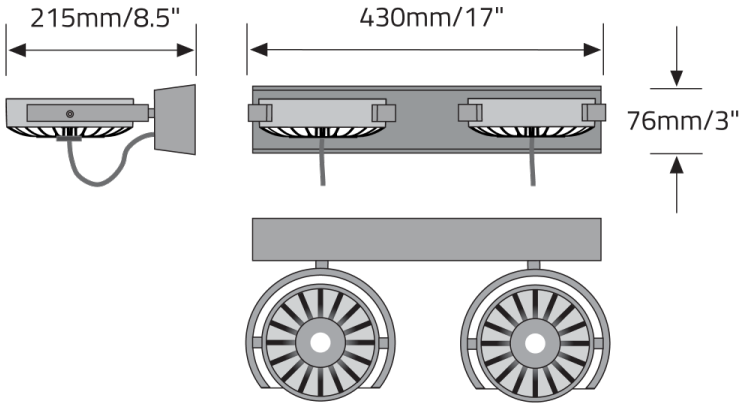

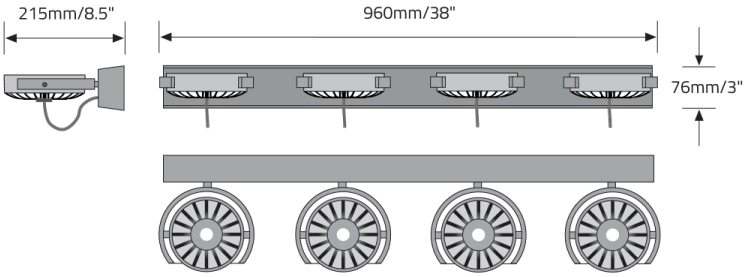

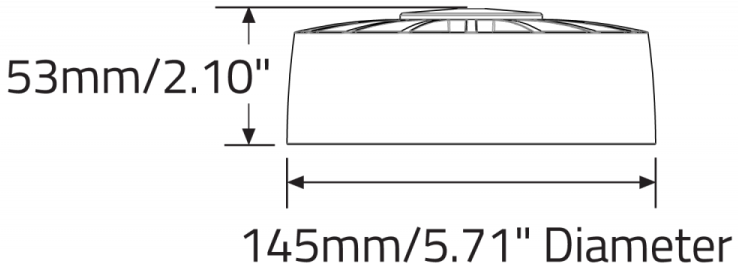

© 2026 Beta-Calco Inc. Specifications are subject to change without notice