XACARA SQ™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA SQ™ - SUSPENDED



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA SQ™ - SUSPENDED

GENERAL SPECIFICATION

Body and trim
Steel and aluminium.

Array housings
Die cast aluminium.

Gimbal
Fully articulating on two axes.

Suspension
Two or four cables, fully adjustable.

Reflectors
Highly reflective, specular finish, vacuum plated.

Protective lens
Clear glass.

Power cable
Silver braided.

Finish
Powder coated, as specified.

Drivers
HPF electronic for 120-277V (EU-240V). 0-10V dimming (10%).

L70 @25°C (77°F)
> 60,000 hrs.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

Approvals
Damp Location (Indoor use only).

Note

Photometric testing performed using LM79 procedures.

OPTICS & FEATURES



Suspended Direct

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA SQ™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

501250 501250

501260 501260

B. CCT/CRI

30A 3000K (min 80 CRI)

30B 3000K (min 90 CRI)

35A 3500K (min 80 CRI)

35B 3500K (min 90 CRI)

40A 4000K (min 80 CRI)

40B 4000K (min 90 CRI)

C. REFLECTOR

ME Medium 36°

XW Extra Wide 70°

D. FINISH

BL Black

MS Silver Metallic

WH White

TECHNICAL DATA

LUMINAIRE

Code	501250	501260
Power (LED)	2 x 26W	4 x 26W
Delivered lms	2 x 2085	4 x 2085
LPW	80	80
CBCP	4104	4104


APPROVALS





© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA SQ™ - SUSPENDED

DIMENSIONAL DIAGRAMS

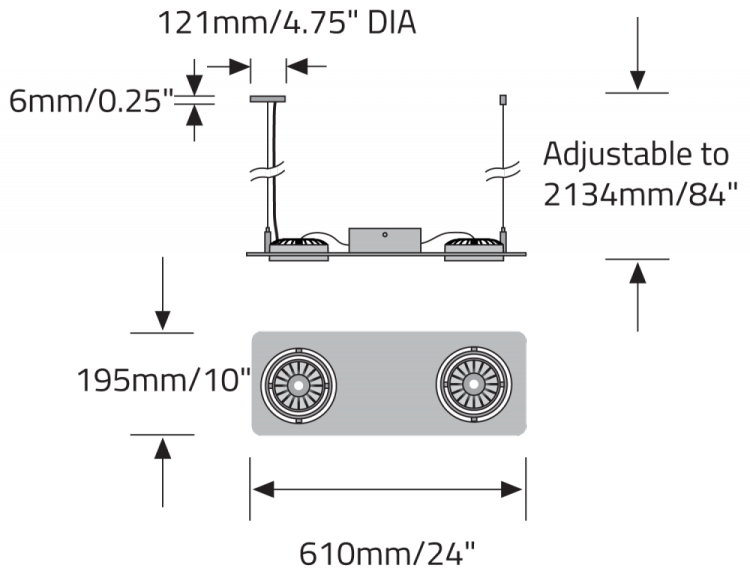

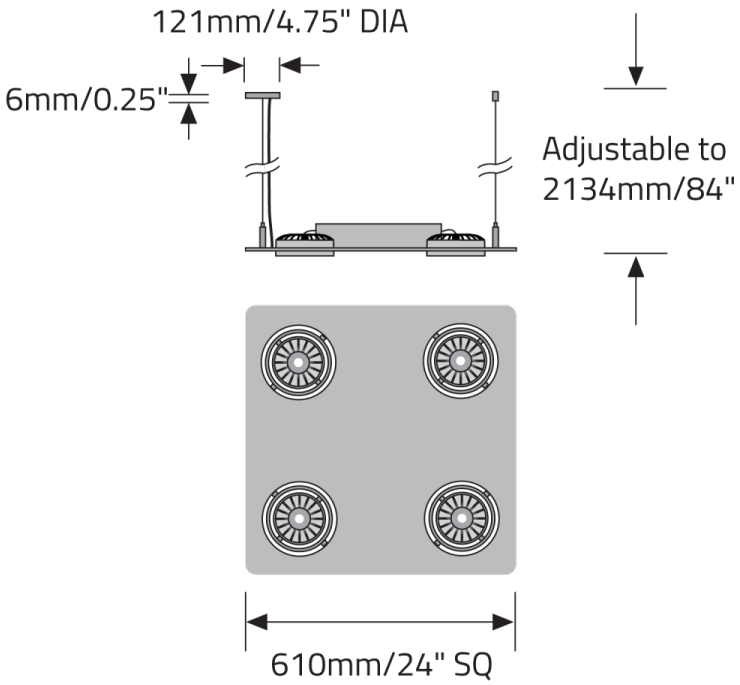

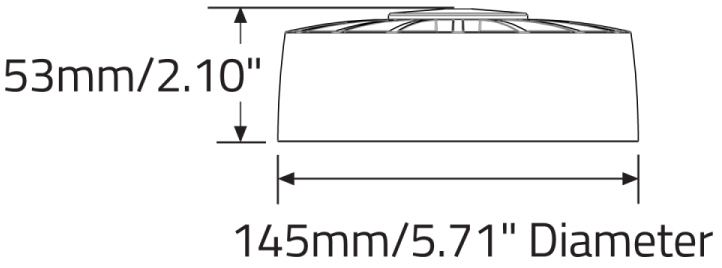

© 2026 Beta-Calco Inc. Specifications are subject to change without notice