XACARA TIROS™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA TIROS™ - SUSPENDED

GENERAL SPECIFICATION

Body and trim
Steel and aluminium (extruded).

Array housings
Die cast aluminium.

Gimbal
Fully articulating on two axes.

Suspension
Two cables, fully adjustable.

Reflectors
Highly reflective, specular finish, vacuum plated.

Protective lens
Clear glass. Supplied with 26W fixtures only.

Power cable
Silver braided.

Finish
Silver Metallic powder coated.

Drivers
HPF electronic for 120-277V (EU-240V). 0-10V dimming (10%).

L70 @25°C (77°F)
> 60,000 hrs.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

Approvals
Damp Location (Indoor use only).

Note

Photometric testing performed using LM79 procedures.

OPTICS & FEATURES



Suspended Direct | 26W-36° | 26W-70° | 38W-28° | 38W-47°

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA TIROS™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

510510 510510	**510520** 510520	**510530** 510530	**510540** 510540
510560 510560	**510580** 510580		

B. BRIDGELUX LED

LA	**LB**	**LC**	**LD** 3500K, 90 CRI, 1770 lms
LE	**LF** 4000K, 90 CRI, 1820 lms	**LG** 3000K, 80 CRI, 3045 lms	**LH**
LI	**LJ** 3500K, 90 CRI, 2674 lms	**LK** 4000K, 80 CRI, 3185 lms	**LL** 4000K, 90 CRI, 2686 lms

C. REFLECTORS

R1 Medium 36° (Bridgelux-26W)	**R2** Extra Wide 70° (Bridgelux-26W)	**R3** Medium 28° (Bridgelux-38W)	**R4** Wide 47° (Bridgelux-38W)

Reflectors **MUST** be ordered

D. DIMMING OPTIONS (FOR 1-4 HEAD FIXTURES ONLY)

D1 0-10V Dimming 1%	**D2** 0-10V Dimming 0.1%	**DL** DALI Dimming 1%	**DA** DALI Dimming 0.1%
L1 Lutron L3DA3W Hi-Lume 1%	**L2** Lutron LDE1 Hi-Lume 1% - H EcoSystem	**L3** Lutron L3DAE Hi-Lume 1% EcoSystem	

TECHNICAL DATA

LUMINAIRE

Code	**510510**	**510520**	**510530**	**510540**	**510560**	**510580**
Type	1 spotlight head	2 spotlight heads	3 spotlight heads	4 spotlight heads	6 spotlight heads	8 spotlight heads

LED

Code	**LA**	**LB**	**LC**	**LD**	**LE**	**LF**
Power (LED)	26W	26W	26W	26W	26W	26W
CCT	3000K	3000K	3500K	3500K	4000K	4000K
CRI	80	90	80	90	80	90
Dimensions	A	A	A	A	A	A
Delivered lms	2085	1689	2127	1770	2169	1820
LPW	80	65	81	68	83	70
CBCP	4104	3324	4186	3483	4268	3581

Code	**LG**	**LH**	**LI**	**LJ**	**LK**	**LL**
Power (LED)	38W	38W	38W	38W	38W	38W
CCT	3000K	3000K	3500K	3500K	4000K	4000K
CRI	80	90	80	90	80	90
Dimensions	B	B	B	B	B	B
Delivered lms	3045	2471	3133	2674	3185	2686
LPW	80	65	82	70	83	70
CBCP	6087	4938	6264	5344	6367	5369

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA TIROS™ - SUSPENDED


APPROVALS





© 2026 Beta-Calco Inc. Specifications are subject to change without notice


XACARA TIROS™ - SUSPENDED


DIMENSIONAL DIAGRAMS

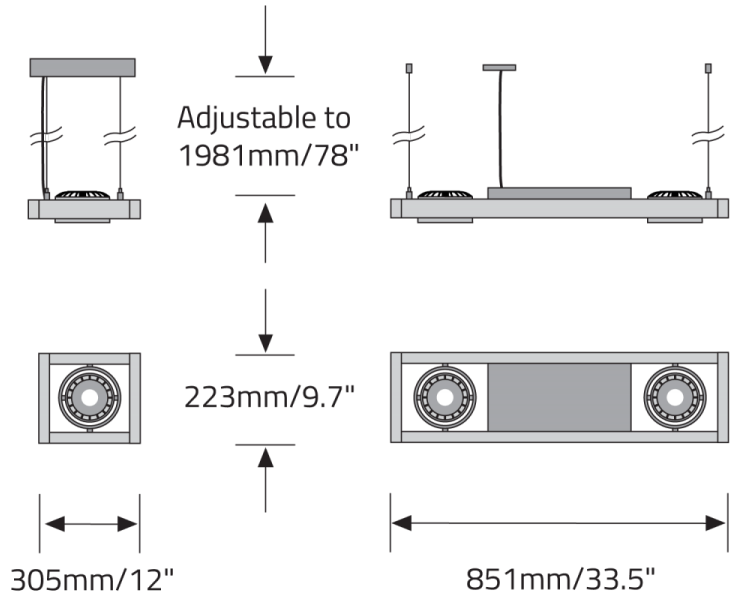


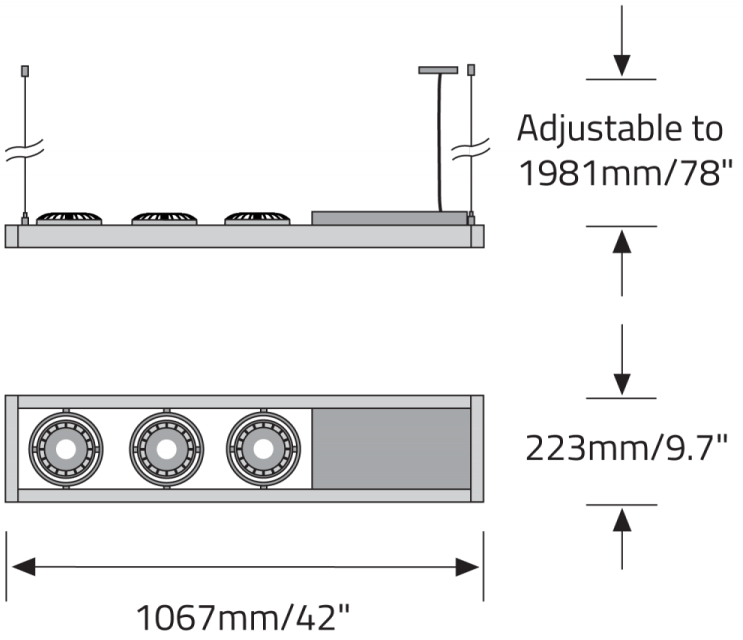

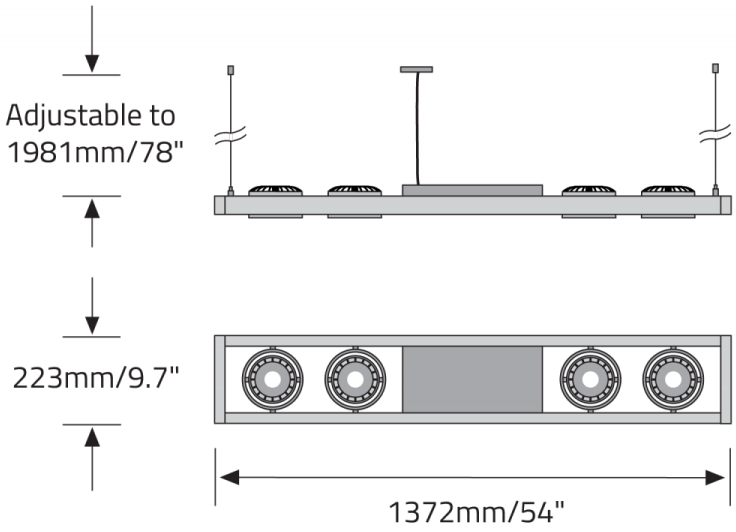

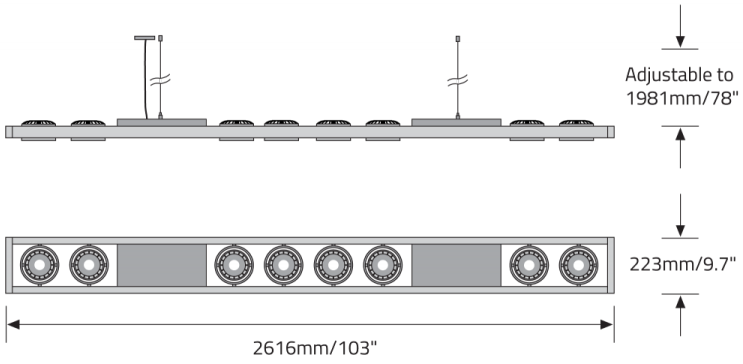

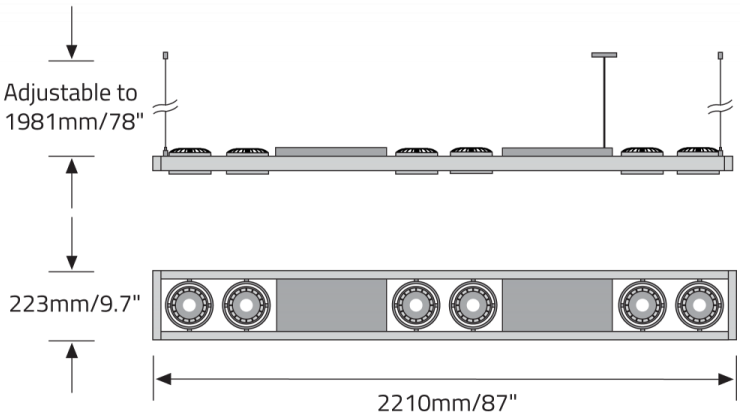

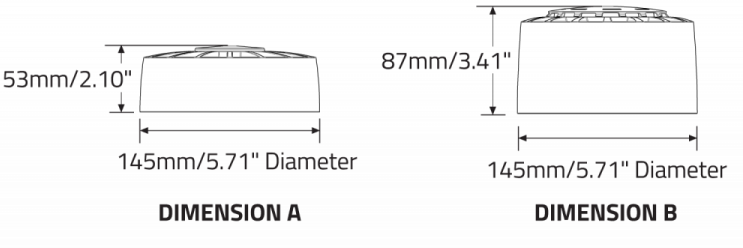

© 2026 Beta-Calco Inc. Specifications are subject to change without notice