XACARA™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA™ - SUSPENDED

GENERAL SPECIFICATION

Body
Die cast aluminum.

Finish
Powder coated.

Suspension
Single stainless steel aircraft cable or steel tube.

Power cable
Clear with silver wires.

Reflectors
Aluminum, specular finish with multiple facets.

Protective lens
Clear glass.

Drivers
HPF electronic, 120/277V (EU-240V).

L70 @25°C (77°F)
> 60,000 hrs.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

Approvals
Damp Location (Indoor use only).

Note

Photometric testing performed using LM79 procedures.

OPTICS & FEATURES


Suspended Direct


36°


70°

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

501000 11W, 862
501002 15W, 1143
501004 26W, 2085

B. CCT

30 3000K (min 80 CRI)
35 3500K (min 80 CRI)
40 4000K (min 80 CRI)

C. REFLECTOR

ME Medium 36°
XW Extra wide 70°

D. FINISH

BL Black
MS Silver Metallic
WH White

E. SUSPENSION

CS Cable suspension
TS3 Tube 18"
TS4 Tube 24"
TS5 Tube 30"
TS6 Tube 36"
TS7 Tube 42"
TS8 Tube 48"

F. DIMMING

D1 0-10V Dimming (1%)
D2 0-10V Dimming (0.1%)
DL DALI Dimming (1%)
DA DALI Dimming (0.1%)
L1 Lutron L3DA3W Hi-Lume 1%
L3 Lutron L3DAE Hi-Lume 1% EcoSystem

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA™ - SUSPENDED

TECHNICAL DATA

LUMINAIRE

Code	501000	501002	501004
Power (LED)	11W	15W	26W
Delivered lms	862	1143	2085
LPW	78	76	80


APPROVALS



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

XACARA™ - SUSPENDED

DIMENSIONAL DIAGRAMS

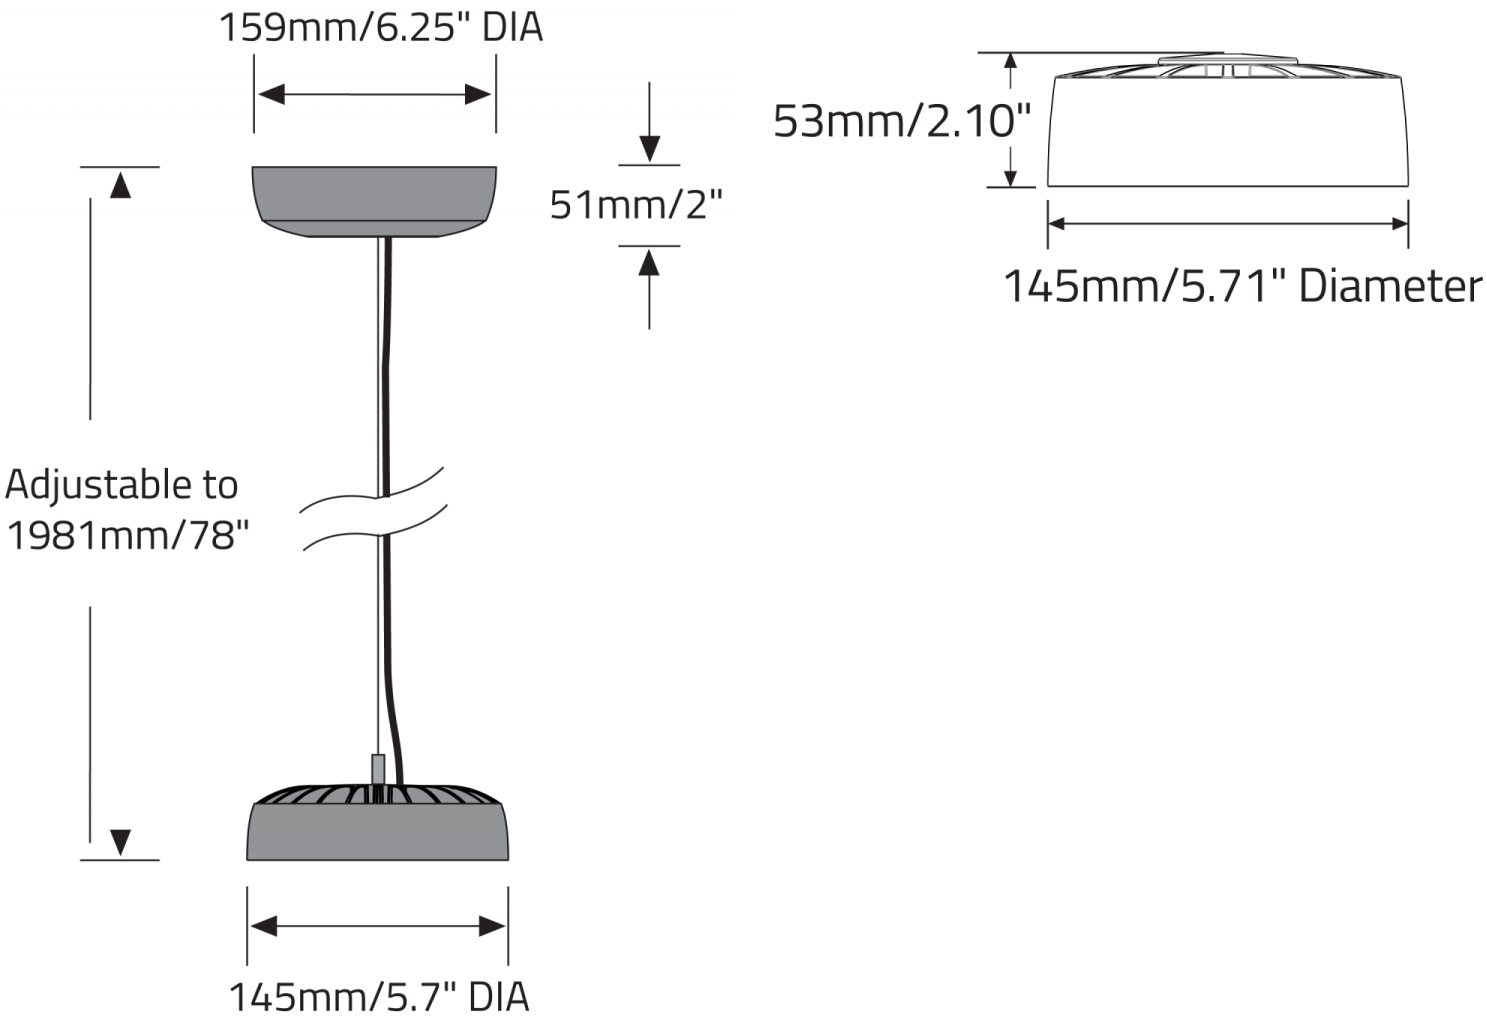

© 2026 Beta-Calco Inc. Specifications are subject to change without notice