
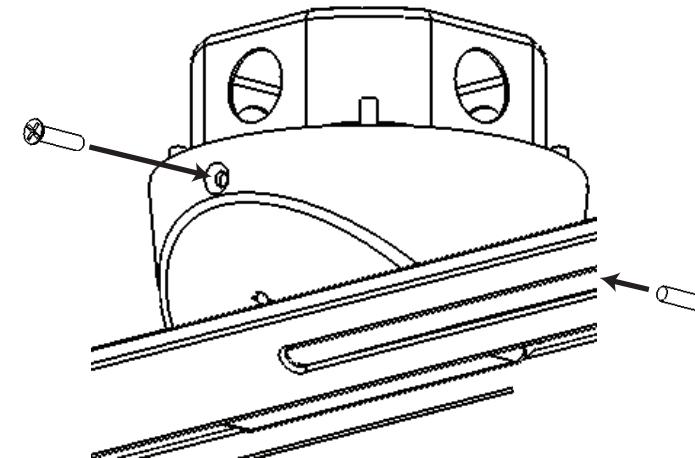
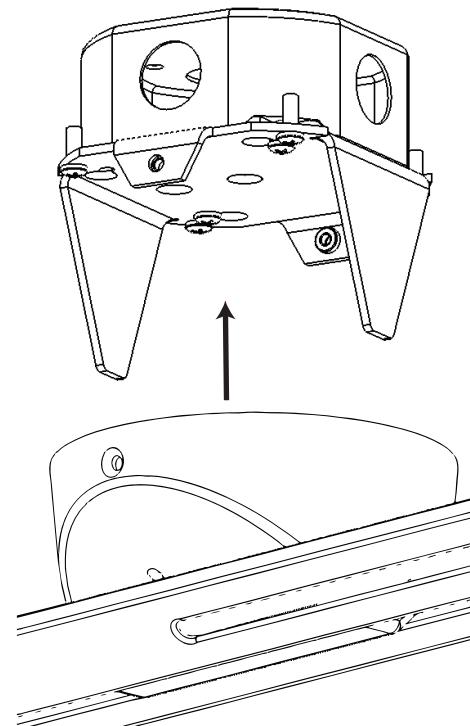
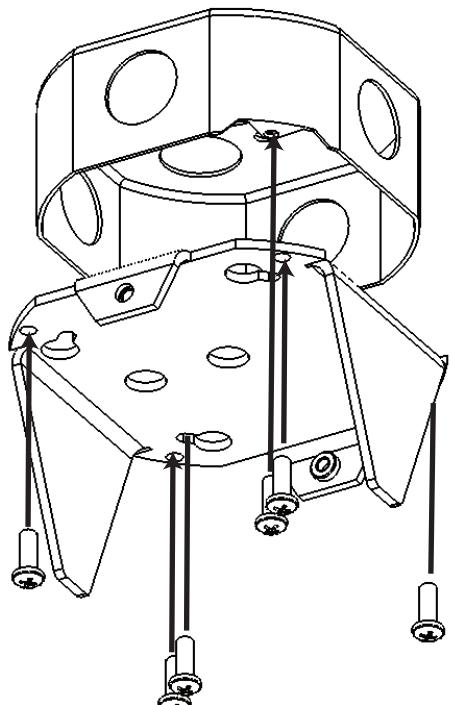
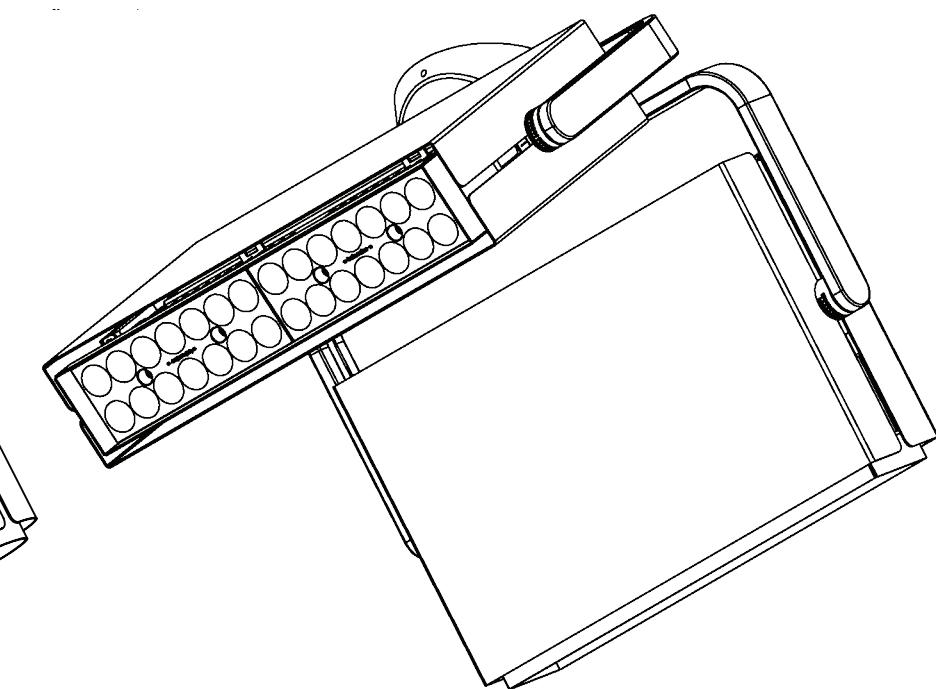


- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

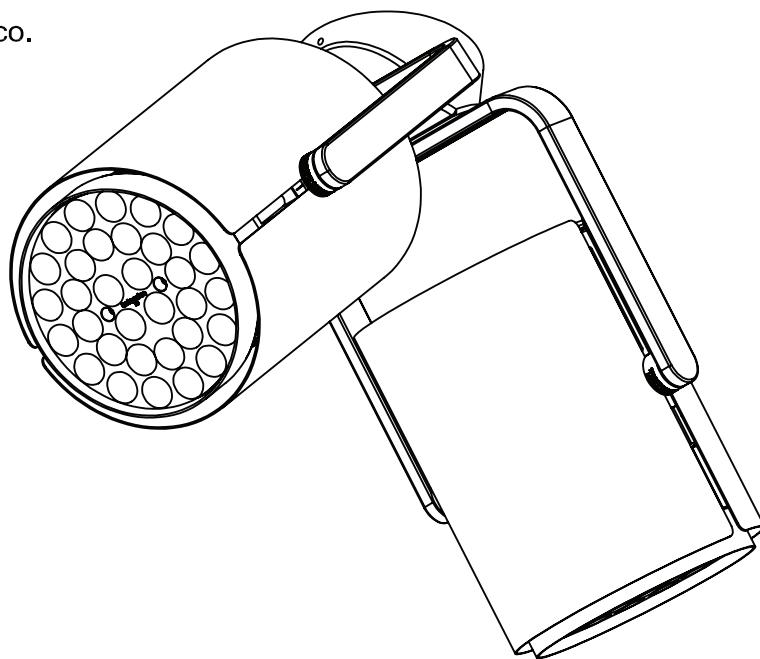

MATREX ROUND SURFACE DUAL

MATREX SURFACE DUAL

1. Attach the mounting bracket to the junction box and into ceiling or wall using the appropriate fasteners - NOT INCLUDED - see Fig. 1.
2. Make all the necessary electrical connections and push fixture double mount on to the mouting bracket - see Fig. 2.
3. Fasten double holder to the mounting bracket using countersunk screws - see Fig. 3.

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**

Fixture Description: MATREX SURFACE DUAL