

1. These instructions may not cover all details or variations. For additional information contact Beta-calco.
2. Luminaires must be installed in accordance with national electrical code and local regulation.
3. Disconnect the power before installing the fixture or servicing.
4. Never touch the yellow portion of the led chip or damage may occur.
5. Min 90°C supply conductors.
6. Fixture designed for installation on a hard (drywall) ceiling.
7. Fixture comes partially assembled.

#### INSTALLATION STEPS:

1. Mount the ceiling plates to the ceiling using appropriate fasteners (not included) according to the structure of the ceiling such a way that one of the  $\varnothing 1.0$  holes locates over the outlet box.  
NOTE: Regular outlet box 2x4", 2x3".  
Fasteners must be applied in the holes highlighted with arrows on Fig. 1. Do not allow gaps between ceiling plates. Make sure all measurements match those in Fig. 1.
2. Attach supplied electrical quick connects to mains voltage and dimming conductors according to Fig. 2.
3. Remove the screw and two nylon washers pre-installed on one of the ceiling brackets (Fig. 3).
4. Raise the fixture and connect the quick connects.
5. Lift the fixture into place to match keyhole labeled on the fixture with the bracket labeled on the ceiling plate and twist onto keyholes (x3). Tighten screws to secure (Fig. 5).
6. Re-install the screw with two nylon washers to one of the ceiling brackets to prevent an accidental rotation of the fixture (Fig. 3).
7. Insert diffusers textured side down by slightly twisting and lifting into place (Fig. 4).

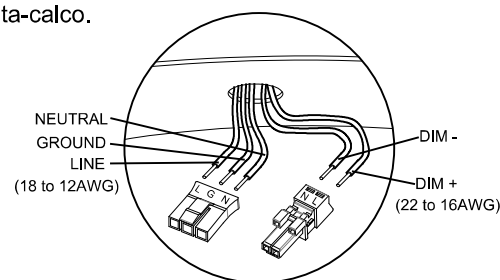


Fig. 2 (All wires to be solid. Strip to 0.35")

SAFETY AIRCRAFT CABLES TO BE ATTACHED TO THE STRUCTURE (NOT SUPPLIED)

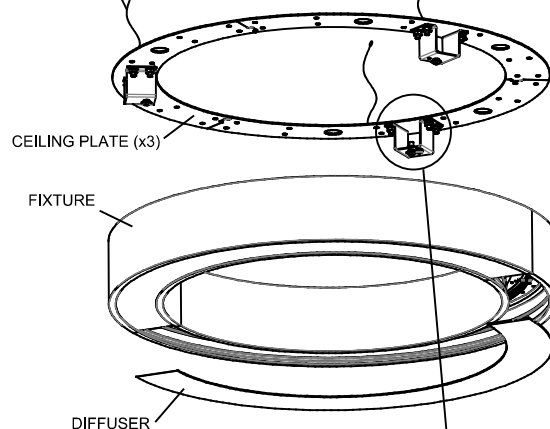


Fig. 4




Fig. 3

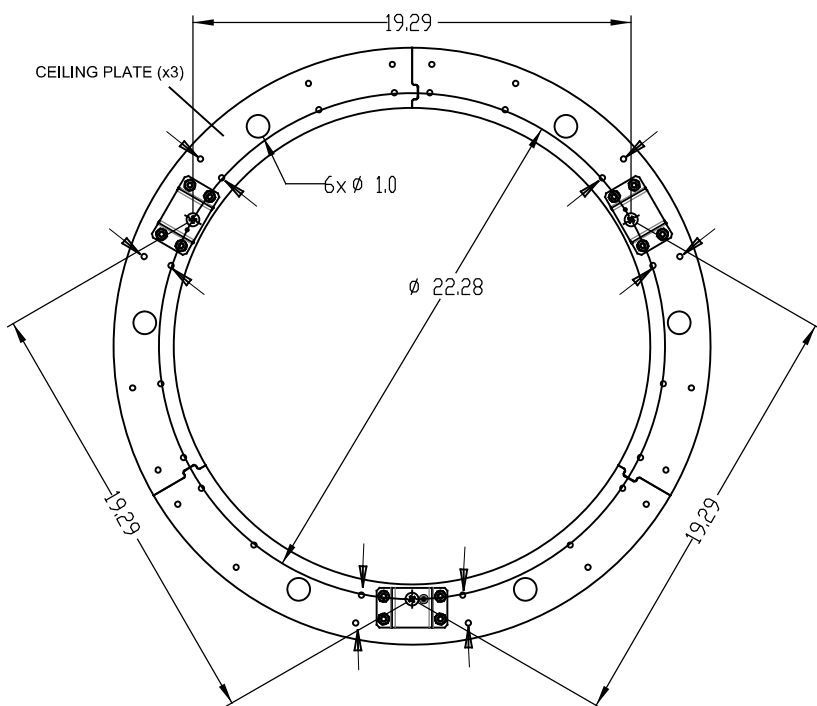


Fig. 1

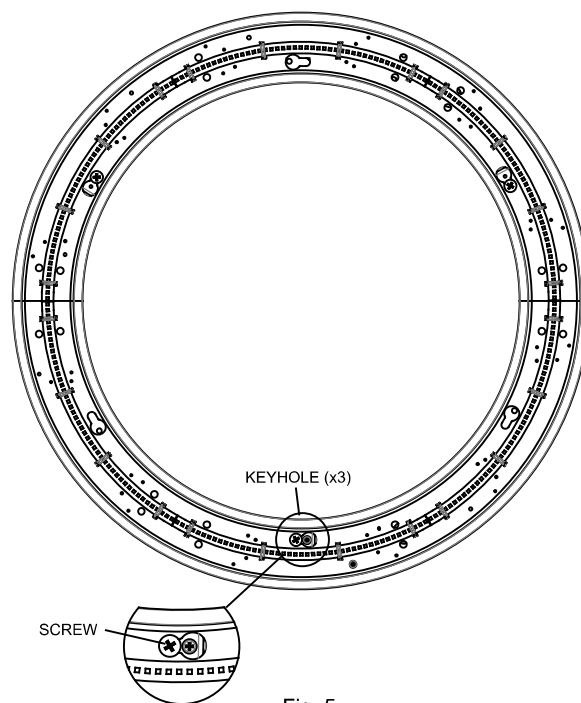


Fig. 5

**NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS**

FIXTURE DESCRIPTION: CEILING, RGTC1P03

BETA-CALCO INC. 1400 WHITEHORSE PD., UNIT 60, TORONTO ON M3J 3A7 CANADA