


- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.  
 2: Luminaires must be installed in accordance with national electrical code and local regulation.  
 3: Disconnect the power before installing the fixture or servicing.  
 4: Min 90°C supply conductors.

5. Insert fixture into the ceiling cutout. Turn the drywall bracket screws to rotate the drywall brackets in place. Tighten the drywall bracket screws to lock into place and secure fixture to the ceiling.

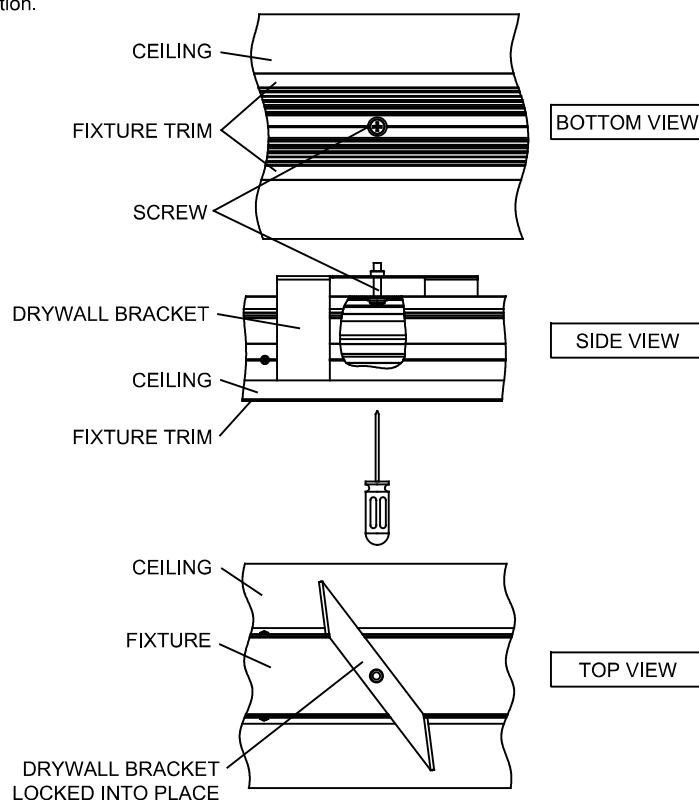

6. Reinstall reflectors with LED boards (see step 3).  
 7. Reinstall diffuser (see step 2).  
 Now the power can safely be turned on.

#### CONTINUOUS FIXTURE INSTALLATION:

8. Start from the first section with the power box and repeat steps 2, 3, 4 and 5.  
 9. For the second section repeat steps 2 and 3.

10. Lift this second section in the ceiling cutout and make the wiring connection between both sections using connectors.

